



**4K UHD**

**HDCP 2.2**



## EL-42M-PIP

**4x2 Matrix with Picture-in-Picture & Seamless Switching**

**OPERATION MANUAL**

**HDMI®**  
HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI licensing Administrator, Inc.

## **DISCLAIMERS**

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

## **COPYRIGHT NOTICE**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2020 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1

## **TRADEMARK ACKNOWLEDGMENTS**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

---



## SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

## VERSION HISTORY

REV.	DATE	SUMMARY OF CHANGE
<b>v1.00</b>	2019/11/22	Preliminary release
<b>v1.01</b>	2020/06/15	Added 3840x2400@60rb output support

# CONTENTS

<b>1. Introduction</b>	<b>1</b>
<b>2. Applications</b>	<b>1</b>
<b>3. Package Contents</b>	<b>1</b>
<b>4. System Requirements</b>	<b>2</b>
<b>5. Features</b>	<b>2</b>
<b>6. Operation Controls and Functions</b>	<b>3</b>
6.1 Front Panel	3
6.2 Rear Panel	5
6.3 RS-232 Pinout and Defaults	6
6.4 OSD Menu	7
6.5 WebGUI Control	25
6.5.1 Upper Tab Windows	27
6.5.2 Window Layout Tab	28
6.5.3 Picture Tab	30
6.5.4 Audio Tab	31
6.5.5 Input EDID Tab	32
6.5.6 HDCP Mode Tab	33
6.5.7 OSD Settings Tab	34
6.5.8 Logo Settings Tab	35
6.5.9 Ethernet Tab	36
6.5.10 Setup Tab	37
6.5.11 Information Tab	38

---



6.6 Telnet Control.....	39
6.7 Serial and Telnet Commands.....	40
<b>7. Connection Diagram .....</b>	<b>61</b>
<b>8. Specifications.....</b>	<b>62</b>
8.1 Technical Specifications .....	62
8.2 Video Specifications.....	63
8.3 Audio Specifications.....	65
8.3.1 Digital Audio .....	65
8.4 Cable Specifications .....	66
<b>9. Acronyms.....</b>	<b>67</b>

---

## 1. INTRODUCTION

This 4 by 2 HDMI Matrix with PiP is a high performance HDMI switch with integrated scaling and multi-windowing technology which can connect up to four 4K UHD<sup>+</sup> HDMI sources to up to two 4K UHD<sup>+</sup> HDMI displays and freely switch between them. It is an ideal solution for monitoring or displaying multiple sources simultaneously for use in control rooms, conference rooms or classrooms. Video resolutions up to 4K@60Hz and LPCM audio up to 7.1 channels at 192kHz are supported and this unit is fully compatible with the HDCP 1.x and 2.2 standards.

Any of 4 different HDMI sources may be displayed individually, full screen, with seamless switching in Matrix mode, or they can be displayed using a variety of multi-window modes including standard views like PiP (Picture in Picture) and PoP (Picture outside of Picture) as well as fully customizable quad-window modes. Control of input/window routing, position and sizing is easy using the front panel controls with OSD menu as well as by WebGUI, RS-232, and Telnet.

## 2. APPLICATIONS

- /// Entertainment Room & Home Theater
- /// Show Room & Demo Room
- /// Lecture Room & Hall Presentation
- /// Public Commercial Display

## 3. PACKAGE CONTENTS

- /// 1× UHD<sup>+</sup> 4×2 HDMI Matrix with PiP
- /// 1× 24V/2.7A DC Power Adapter
- /// 1× Rackmount Ears (Set of 2)
- /// 1× Shockproof Feet (Set of 4)
- /// 1× Operation Manual

## 4. SYSTEM REQUIREMENTS

- /// HDMI source equipment such as media players, video game consoles or set-top boxes.
- /// HDMI receiving equipment such as HDTVs, monitors or audio amplifiers.


## 5. FEATURES

- /// HDMI 2.0 and DVI 1.0 compliant (with the use of an HDMI-DVI adapter)
- /// HDCP 1.x and 2.2 compliant
- /// 4 HDMI inputs and 2 HDMI outputs
- /// Supports up to 4K UHD<sup>+</sup> (18Gbps, 4K@50/60Hz 4:4:4, 8-bit) video input and output
- /// Seamless switching (no loss of sync to display) when switching sources in Matrix mode
- /// Supports up to four simultaneous, freely scalable, windows in multi-windowing modes
- /// Supports the ability to store a multi-window arrangement as a preset that can be recalled later
- /// Independent audio source selection and routing in all modes
- /// Inputs 1 & 2 support pass-through of many audio formats including 8 channel LPCM, Bitstream, and HD Bitstream (Inputs 3 & 4 are limited to 2 channel LPCM only)
- /// Each window can have a border with a selectable colour
- /// Uploadable and freely positionable graphic logo support
- /// Intuitive and easy adjustment of window size, position and settings in multi-window modes via the WebGUI
- /// Per-input EDID management with internal or external EDID options
- /// Controllable via front panel buttons, WebGUI, Telnet, and RS-232



## 6. OPERATION CONTROLS AND FUNCTIONS

### 6.1 Front Panel

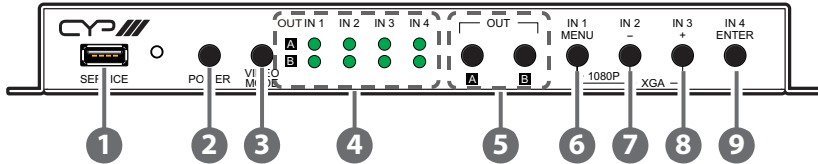

- 1 SERVICE Port:** This port is reserved for firmware update and user EDID/logo upload use only.
- 2 POWER LED & Button:** Press this button to power the unit on (green LED) or place it into stand-by mode (red LED).

*Note: Ethernet and RS-232 remain active when the unit is in stand-by mode.*
- 3 VIDEO MODE Button:** Press this button to sequentially switch the unit's operational mode between Matrix, PiP, PoP, and Quad.
- 4 OUT A~B/IN 1~4 LED Array:** In Matrix mode, these LED's indicate the currently selected sources (IN 1~4) routed to each of the two outputs (OUT A~B). When the unit is in a multi-windowing mode (PiP/PoP/Quad/Preset) all LEDs will be illuminated simultaneously.

*Note: When source selection is active the associated output's LED(s) will blink.*
- 5 OUT A/B Buttons:** In Matrix mode, either of these buttons to activate/deactivate discrete source selection for the associated output. In multi-windowing modes (PiP/PoP/Quad/Preset) either button will activate/deactivate sequential source selection for the 4 windows.


*Note: These buttons only activate/deactivate the ability to change sources. Actual source selection is accomplished using the IN 1~4 buttons.*
- 6 IN 1/MENU Button:** When not in source selection mode, press to enter the OSD menu, or to back out from menu items. When source selection is active, pressing this button will either select input 1 (Matrix mode) or sequentially switch through all 4 inputs for window 1 (PiP/PoP/Quad/Preset modes).

*Note: Pressing "MENU" and "+" together will reset the output resolution*

to XGA (1024×768@60Hz). Pressing “MENU” and “-” together will reset the output resolution to 1080p@60Hz.

- 7 IN 2/- (MINUS) Button:** When not in source selection mode, press to move down or adjust selections within OSD menus. When source selection is active, pressing this button will either select input 2 (Matrix mode) or sequentially switch through all 4 inputs for window 2 (PiP/PoP/Quad/Preset modes).
- 8 IN 3/+ (PLUS) Button:** When not in source selection mode, press to move up or adjust selections within OSD menus. When source selection is active, pressing this button will either select input 3 (Matrix mode) or sequentially switch through all 4 inputs for window 3 (PiP/PoP/Quad/Preset modes).
- 9 IN 4/ENTER Button:** When not in source selection mode, press to confirm a selection within the OSD or to go deeper into a menu item. When source selection is active, pressing this button will either select input 4 (Matrix mode) or sequentially switch through all 4 inputs for window 4 (PiP/PoP/Quad/Preset modes).

## 6.2 Rear Panel

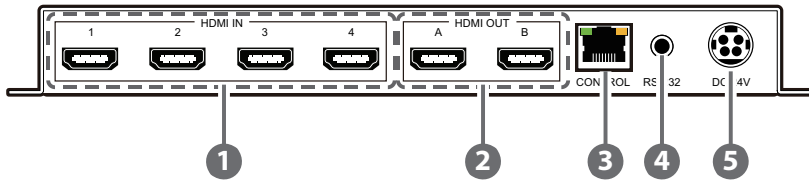


- 1 HDMI IN 1~4 Ports:** Connect to HDMI source equipment such as media players, game consoles, or set-top boxes.  
*Note: Audio support on inputs 3~4 is limited to 2 channel LPCM.*
- 2 HDMI OUT A~B Ports:** Connect to HDMI TVs, monitors, or amplifiers for digital video and audio output.
- 3 CONTROL Port:** Connect directly, or through a network switch, to your PC/laptop to control the unit via Telnet/WebGUI.
- 4 RS-232 Port:** Connect directly to a PC, laptop, or other serial control device with a 3.5mm adapter cable to send RS-232 commands to control the unit.
- 5 DC 24V Port:** Plug the 24V DC power adapter into this port and connect it to an AC wall outlet for power.

### 6.3 RS-232 Pinout and Defaults

Serial Port Default Settings	
<b>Baud Rate</b>	19200
<b>Data Bits</b>	8
<b>Parity Bits</b>	None
<b>Stop Bits</b>	1
<b>Flow Control</b>	None

3.5mm to DE-9  
Adapter Cable



## 6.4 OSD Menu

All functions of this unit can be controlled by using the OSD (On Screen Display) which is activated by pressing the MENU button on the front of the unit. Use the + (PLUS), – (MINUS), and ENTER buttons to navigate the OSD menu. Press the MENU button to back out from any menu item and then press it again to close the menu.

MAIN MENU
<b>Video Mode</b>
<b>Window Layout</b>
<b>Picture</b>
<b>Audio</b>
<b>Input EDID</b>
<b>HDCP Mode</b>
<b>Output Resolution</b>
<b>OSD Settings</b>
<b>Logo Settings</b>
<b>Ethernet</b>
<b>Preset</b>
<b>Setup</b>
<b>Information</b>

The individual functions of the OSD will be introduced in the following section. Items marked in **BOLD** are the factory default settings.

VIDEO MODE	
2ND LEVEL	3RD LEVEL
Video Mode	Matrix
	PiP
	PoP
	<b>QUAD</b>
	Preset 1
	Preset 2
	Preset 3
	Preset 4
PiP/PoP/Quad/Preset Mode	
WIN 1 Source	In 1~4 <b>[1]</b>
WIN 2 Source	In 1~4 <b>[2]</b>
WIN 3 Source	In 1~4 <b>[3]</b>
WIN 4 Source	In 1~4 <b>[4]</b>
Matrix Mode	
OUT A Source	In 1~4 <b>[1]</b>
OUT B Source	In 1~4 <b>[2]</b>

- 1) **Video Mode:** Select the preferred operation mode of the unit.  
*Note: Selecting some modes will limit available features.*
- 2) **WIN 1/2/3/4 Source:** Select the source for the specified window in multi-windowing modes (PiP, PoP, Quad).
- 3) **OUT A/B Source:** Select the source for the specified HDMI output when in Matrix mode.

Window Layout (Matrix Mode)	
2ND LEVEL	3RD LEVEL
Input Select	In 1~4 [1]
Aspect Ratio	<b>FULL</b>
	16:9
	16:10
	4:3
	Best Fit
Mirror	<b>NO</b>
	Yes
Border On/Off	On
	<b>OFF</b>
Border Colour	Black
	Red
	<b>GREEN</b>
	Blue
	Yellow
	Magenta
	Cyan
	White
	Dark Red
	Dark Green
	Dark Blue
	Dark Yellow
	Dark Magenta
	Dark Cyan
	Gray
Window Reset	<b>NO</b>
	Yes

- 1) **Input Select:** Select the input to modify.  
*Note: All settings are individually saved, per-input.*
- 2) **Aspect Ratio:** Select a fixed aspect ratio for the currently selected window. Selecting the “Full” aspect ratio will stretch the source to fill the output, regardless of original aspect. Selecting “Best Fit” will automatically set the ratio based on the window’s current source resolution.
- 3) **Mirror:** Selecting “On” will flip the currently selected input horizontally.
- 4) **Border On/Off:** Enables or disable the colour border around the currently selected input.
- 5) **Border Colour:** Select the colour to use for the border of the currently selected input.
- 6) **Window Reset:** Reset the current input to its default settings.

Window Layout (PiP/PoP/Quad/Presets Modes)	
2ND LEVEL	3RD LEVEL
Window Select	Win 1~4 [1]
Window On/Off	<b>ON</b>
	Off
Position X	0~Max H resolution
Position Y	0~Max V resolution
Size Width	1~Max H resolution
Size Height	1~Max V resolution
Priority	1~4 [4]
Aspect Ratio	<b>FULL</b>
	16:9
	16:10
	4:3
	Best Fit
	User
Mirror	<b>NO</b>
	Yes
Border On/Off	On
	<b>OFF</b>



Window Layout (PiP/PoP/Quad/Preset Modes)	
2ND LEVEL	3RD LEVEL
Border Colour	Black
	Red
	<b>GREEN</b>
	Blue
	Yellow
	Magenta
	Cyan
	White
	Dark Red
	Dark Green
	Dark Blue
	Dark Yellow
	Dark Magenta
	Dark Cyan
	Gray
Window Reset	<b>NO</b>
	Yes

- 1) **Window Select:** Select the window to modify.  
*Note: All settings are individually saved, per-window/per-mode.*
- 2) **Window On/Off:** Enable or disable the currently selected window.
- 3) **Position X/Y:** Set the X and Y coordinate position of the upper left corner of the currently selected window.
- 4) **Size Width/Height:** Set the horizontal and vertical size of the currently selected window.
- 5) **Priority:** Select the layer priority of the currently selected window. Priority 1 is at the front and priority 4 is at the back.
- 6) **Aspect Ratio:** Select a fixed aspect ratio for the currently selected window. The aspect ratio will be based on the window's current height. Selecting the "Full" aspect ratio will return the window to the current mode's default size and shape for that window. Selecting "Best

Fit” will automatically set the ratio based on the window’s current source resolution.

- 7) **Mirror:** Selecting “On” will flip the currently selected window horizontally.
- 8) **Border On/Off:** Enables or disable the colour border around the currently selected window.
- 9) **Border Colour:** Select the colour to use for the border of the currently selected window.
- 10) **Window Reset:** Reset the current window to its default settings based on the currently selected mode.

Picture	
2ND LEVEL	3RD LEVEL
Input Select	<b>IN 1</b>
	In 2
	In 3
	In 4
Contrast	0~100 [ <b>75</b> ]
Brightness	0~100 [ <b>50</b> ]
Saturation	0~100 [ <b>50</b> ]
Hue	0~100 [ <b>50</b> ]
Sharpness H	0~10 [ <b>10</b> ]
Sharpness V	0~10 [ <b>10</b> ]
Reset	<b>NO</b>
	Yes

- 1) **Input Select:** Select the input to modify.
- 2) **Contrast:** Set the overall contrast of the currently selected input.
- 3) **Brightness:** Set the overall brightness of the currently selected input.
- 4) **Saturation:** Set the overall saturation of the currently selected input.
- 5) **Hue:** Set the hue shift of the currently selected input.
- 6) **Sharpness H/V:** Set the amount of sharpness processing to apply to the currently selected input.
- 7) **Reset:** Reset the current input to its default settings.

Audio (Matrix Mode)	
2ND LEVEL	3RD LEVEL
OUT A Source	<b>WINDOW</b>
	In 1
	In 2
	In 3
	In 4
OUT A Mute	On
	<b>OFF</b>
OUT B Source	<b>WINDOW</b>
	In 1
	In 2
	In 3
	In 4
OUT B Mute	On
	<b>OFF</b>

- 1) **OUT A Source:** Select the audio source to pair with video output A.
- 2) **OUT A Mute:** Enable or disable muting audio output A.
- 3) **OUT B Source:** Select the audio source to pair with video output B.
- 4) **OUT B Mute:** Enable or disable muting audio output B.

Audio (PiP/PoP/Quad/Preset Modes)	
2ND LEVEL	3RD LEVEL
OUT A Source	<b>WIN 1</b>
	Win 2
	Win 3
	Win 4
	In 1
	In 2
	In 3
	In 4
OUT A Mute	On
	<b>OFF</b>
OUT B Source	<b>WIN 1</b>
	Win 2
	Win 3
	Win 4
	In 1
	In 2
	In 3
	In 4
OUT B Mute	On
	<b>OFF</b>

- 1) **OUT A Source:** Select the audio source to pair with video output A.
- 2) **OUT A Mute:** Enable or disable muting audio output A.
- 3) **OUT B Source:** Select the audio source to pair with video output B.
- 4) **OUT B Mute:** Enable or disable muting audio output B.

Input EDID	
2ND LEVEL	3RD LEVEL
EDID Mode	<b>ALL</b>
	Independent
All EDID	<b>1080P60 2CH</b>
	4Kp30 2CH
	4Kp60 2CH
	Sink OUT A
	Sink OUT B
	User 1
	User 2
	User 3
User 4	
IN 1 EDID	Same as [All EDID]
IN 2 EDID	Same as [All EDID]
IN 3 EDID	Same as [All EDID]
IN 4 EDID	Same as [All EDID]
User 1 Update	<b>NO</b>
	Yes
User 2 Update	<b>NO</b>
	Yes
User 3 Update	<b>NO</b>
	Yes
User 4 Update	<b>NO</b>
	Yes

1) **EDID Mode:** Select how to assign EDIDs to the unit’s inputs. Selecting “Independent” allows for a different EDID to be assigned to each input, selecting “All” allows for a single EDID to be assigned to all inputs.

2) **All EDID:** Select the EDID to assign to all inputs.

*Note: Only available in the “All” EDID Mode.*

3) **In 1~4 EDID:** Select the EDID to assign to the specified input.

*Note: Only available in the "Independent" EDID Mode.*

4) **User 1~4 EDID:** To update any of the unit's 4 User EDIDs via USB, select "Yes" next to the appropriate User EDID and then insert a USB stick containing the new EDID into the Service port. The upload will occur immediately.

*Note: The USB stick must contain, in the root directory, a compatible and properly named (EDID\_User\_\*.BIN) EDID file.*

HDCP Mode	
2ND LEVEL	3RD LEVEL
In 1~4	HDCP Support Off
	Refer to Source
	<b>REFER TO DISPLAY</b>
OUT A	[Current HDCP status display]
OUT B	
Win 1	
Win 2	
Win 3	
Win 4	

1) **In 1~4:** Select the HDCP behavior for each input.

- **HDCP Support Off:** Completely disables support for HDCP on that input.
- **Refer to Source:** Makes the input port support the same HDCP version as required by the connected source.
- **Refer to Display:** Makes the input support the HDCP version of the currently connected displays.

2) **HDCP Status:** Displays the current HDCP status of all sources and outputs.

Output Resolution
<b>2ND LEVEL</b>
640×480p59
480p60
576p50
800×600p60
848×480p60
1024×768p60
1280×720p50
1280×720p60
1280×768p60
1280×800p60
1280×960p60
1280×1024p60
1360×768p60
1366×768p60
1400×1050p60
1440×900p60
1600×900p60RB
1600×1200p60
1680×1050p60
1920×1080p24
1920×1080p25
1920×1080p30
1920×1080p50
<b>1920×1080P60</b>

Output Resolution
2ND LEVEL
1920×1200RB
2048×1152RB
3840×2160p24
3840×2160p25
3840×2160p30
4K p24 (DCI)
4K p25 (DCI)
4K p30 (DCI)
4K p50 (DCI)
4K p59 (DCI)
4K p60 (DCI)
3840×2160p50
3840×2160p59
3840×2160p60
3840×2400p60RB
Native OUT A
Native OUT B

1) **Output Resolution:** Select the preferred video output resolution.

*Note: Both outputs always share the same resolution selection.*



OSD Settings	
2ND LEVEL	3RD LEVEL
Menu Position	<b>TOP LEFT</b>
	Top Right
	Bottom Right
	Bottom Left
Menu Timeout	Off
	5~60 [ <b>10</b> ]
Info. Timeout	Off
	5~60 [ <b>5</b> ]
Info. Display	<b>ON</b>
	Off
Transparency	<b>OFF</b>
	1~10
Background	Black
	<b>GRAY</b>
	Blue

- 1) **Menu Position:** Set the position of the OSD menu on the output.
- 2) **Menu Timeout:** Set the length of time, in seconds, that the OSD menu will continue to be displayed if there is no user input, or disable the timeout completely.
- 3) **Info. Timeout:** Set the length of time, in seconds, that the informational OSD will be displayed after a signal or source change, or disable the timeout completely.
- 4) **Info. Display:** Enable or disable the informational OSD.
- 5) **Transparency:** Set the transparency level of the background of the OSD menu.
- 6) **Background:** Set the colour of the background of the OSD menu.

Logo Settings	
2ND LEVEL	3RD LEVEL
Logo On/Off	On
	<b>OFF</b>
Position X	0~100 [10]
Position Y	0~100 [10]
Load Default Logo	<b>NO</b>
	Yes
Logo Update	<b>NO</b>
	Yes

- 1) **Logo On/Off:** Enable or disable displaying the logo graphic.
- 2) **Position X/Y:** Sets the position of the logo's upper left corner, within the output. The position values are a relative percentage of the available output resolution.
- 3) **Load Default Logo:** Selecting yes will reset the logo and install a default test image.

*Note: The reset process can take a few moments. Progress information will be displayed on the OSD while the default logo is being installed. The unit will automatically reboot when it is finished.*

- 4) **Logo Update:** To upload a graphic logo via USB, select "Yes" and then insert a USB stick containing the new logo graphic file (8-bit \*.BMP format, 960×540 max resolution) into the Service port. The upload will occur immediately.

*Note: The USB stick must contain, in the root directory, a compatible and properly named (Logo\_User\_\*.BMP) graphic file.*

Ethernet	
2ND LEVEL	3RD LEVEL
IP Mode	<b>STATIC</b>
	DHCP
Static IP Config	
IP Address	X.X.X.X [ <b>192.168.1.50</b> ]
Subnet Mask	X.X.X.X [ <b>255.255.255.0</b> ]
Gateway	X.X.X.X [ <b>192.168.1.254</b> ]
Link Status	
IP Mode	[Current IP Mode]
IP Address	[Current Network Info]
Subnet Mask	
Gateway	
MAC Addr.	[Unit's MAC Address]

- 1) **IP Mode:** Set the unit's IP address mode to Static or DHCP.
- 2) **Static IP Config:** When the unit is in Static IP mode the IP address, netmask and gateway addresses may be manually set here. Changes will occur immediately.

*Note: Only editable in Static IP mode.*

- 3) **Link Status:** Displays the unit's current IP configuration and the unit's MAC address.

Preset	
2ND LEVEL	3RD LEVEL
Save	<b>PRESET 1</b>
	Preset 2
	Preset 3
	Preset 4
Recall	<b>PRESET 1</b>
	Preset 2
	Preset 3
	Preset 4

- 1) **Save Preset 1~4:** Select a preset and then press the “ENTER” button to store the unit’s current video window configuration to the currently selected preset.
- 2) **Recall Preset 1~4:** Select a preset and then press the “ENTER” button to activate the currently selected preset.

Setup	
2ND LEVEL	3RD LEVEL
Auto Sync Off	<b>ALWAYS ON</b>
	5 sec.
	10 sec.
	15 sec.
	30 sec.
	1 min.
	1.5 min.
	2 min.
	2.5 min.
	3 min.
	5 min.
10 min.	

Setup	
2ND LEVEL	3RD LEVEL
Firmware Update	<b>NO</b>
	Yes
User EDID Reset	<b>NO</b>
	Yes
Factory Reset	<b>NO</b>
	Yes

- 1) **Auto Sync Off:** Set the amount of time to continue outputting sync with a black screen if there are no live sources and no operations have been executed on the unit. Setting this to "Always On" forces the unit to always output sync.
- 2) **Firmware Update:** To update the firmware via USB, select "Yes" and then insert a USB stick containing the new firmware into the Service port. The upload will occur immediately.  
*Note: The USB stick must contain, in the root directory, a compatible and properly named (\*.BIN) firmware file.*
- 3) **User EDID Reset:** Select "Yes" to reset the unit's User EDIDs to their factory default states.
- 4) **Factory Reset:** Select "Yes" to reset the unit to its factory default state. After the reset is complete, the unit will reboot automatically.

Information	
2ND LEVEL	3RD LEVEL
IN 1	[Current Input Resolutions]
IN 2	
IN 3	
IN 4	
OUT	[Current Output Resolution]
Video Mode	[Current Mode]
Sink A Native	[Native resolutions as reported by EDID]
Sink B Native	
Firmware	[Current Firmware Versions]
RX3/RX4 Firmware	

- 1) **Information:** Shows the currently detected details for all inputs and both outputs as well as listing the status of a few critical system settings and relevant firmware versions.

## 6.5 WebGUI Control

### Device Discovery

Please obtain the “Device Discovery” software from your authorised dealer and save it in a directory where you can easily find it.

Connect the unit and your PC/Laptop to the same active network and execute the “Device Discovery” software. Click on “Find Devices on Network” and a list of devices connected to the local network will show up indicating their current IP address.

*Note: The unit’s default IP address is 192.168.1.50.*

Find Devices on Network			
Product Name	Description	IP Address	MAC Address

By clicking on one of the listed devices you will be presented with the network details of that particular device.

Product ID	
Product Name	
MAC Address	00:00:00:00:00:00
IP Address	<input type="text"/>
Subnet Mask	<input type="text"/>
Gateway IP	<input type="text"/>
DNS	<input type="text"/>
IP Mode	Static
Web GUI Port	Static
Telnet Port	Dhcp
S / N	0
Firmware Version	
Hardware Version	
Description	
Web GUI	<a href="#">Web GUI</a>
Save	Reboot

- 1) IP Mode:** If you choose, you can alter the static IP network settings for the device, or switch the unit into DHCP mode to automatically obtain proper network settings from a local DHCP server. To switch to DHCP mode, please select DHCP from the IP mode drop-down, then click “Save” followed by “Reboot”.
- 2) WebGUI Hotkey:** Once you are satisfied with the network settings, you may use them to connect via Telnet or WebGUI. The network information window provides a convenient link to launch the WebGUI directly.


## WebGUI Overview

After connecting to the WebGUI's address in a web browser, the login screen will appear. Please enter the appropriate user name and password then click "Submit" to log in.

*Note: The default user name and password is "admin".*

A login form titled "Login" with two input fields: "Username:" and "Password:". Below the fields is a blue button labeled "Log In".

On the left side of the browser you will see the following menu tabs where all primary functions of the unit are controllable via the built in WebGUI. The individual functions will be introduced in the following sections.

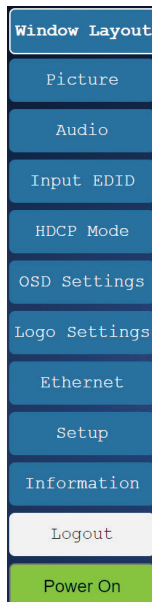

Clicking the red "Logout" tab will automatically log the currently connected user out of the WebGUI and return to login page. Clicking on the "Power" button will toggle the unit's current power state between on (green) and stand-by (red).



### 6.5.1 Upper Tab Windows

This upper section of the web interface is visible on every tab and provides control over the unit's operational mode, source selection, and output resolution as well as containing basic information about the currently connected source and display devices.

Source	Display	Video Mode
Input 1: 1920x1080P60	Resolution: 1920x1080p60	Video Mode: Quad
Input 2: 1920x1080P60	Sink A Native: 3840x2160P60	Win 1: IN 1 Out A: IN 1
Input 3: 1920x1080P60	Sink B Native: Not Linked	Win 2: IN 2 Out B: IN 1
Input 4: 1920x1080P60		Win 3: IN 3
		Win 4: IN 4

1) **Source:** This section displays the currently detected resolution for the sources connected to each input.

#### 2) Display:

- **Resolution:** Use the dropdown to select the preferred output resolution for the unit.

*Note: Both outputs will always share the same output resolution, even in Matrix mode.*

- **Sink A/B Native:** Displays the native resolution of both connected displays as reported by their respective EDIDs.

#### 3) Video Mode:

- **Video Mode:** Use the dropdown to select the unit's operational mode. Available options are: Matrix, PiP, PoP, Quad, and Presets 1~4.

*Note: Switching between video modes will cause the output to briefly go to black, but audio output will not be affected if the selected audio source is the same in both modes.*

- **Win 1~4:** Select the video source to use in each window of a multi-window mode (PiP/PoP/Quad/Preset).

*Note: Only available when a multi-window mode is active.*

- **Out A~B:** Select the video source for each output in Matrix mode.

*Note: Only available when Matrix mode is active.*

### 6.5.2 Window Layout Tab

This tab provides control over the position, size, aspect, priority, and other settings of each window in multi-viewer modes. A graphical representation of the layout is also provided. When the unit is in Matrix mode, only a limited selection of controls are available.

*Note: Only the information from the currently selected window/input is displayed. A window's position and size cannot exceed the current output resolution.*



- 1) **Selection:** In multi-windowing modes, use the dropdown to select the window to modify. In Matrix mode select the input to modify.  
*Note: Changes made while a "Preset" video mode is selected will automatically be applied and saved to that preset.*
- 2) **Display:** Enable or disable the currently selected window.  
*Note: Not available in Matrix mode.*
- 3) **Position X/Y:** Set the X and Y coordinate position of the upper left corner of the currently selected window. Click on the "Save" button, after making changes, to make them active.  
*Note: Not available in Matrix mode.*

- 4) Size Width/Height:** Set the horizontal and vertical size of the currently selected window. Click on the “Save” button, after making changes, to make them active.

*Note: Not available in Matrix mode.*

- 5) Priority:** Select the layer priority of the currently selected window. Priority 1 is at the front and priority 4 is at the back.

*Note: Not available in Matrix mode.*

- 6) Aspect Ratio:** Use the dropdown to select a fixed aspect ratio for the currently selected window or input. Available options are: Full, 16:9, 16:10, 4:3, Best Fit, and User. In multi-windowing modes the aspect ratio will be based on the window’s current height. Selecting the “Full” aspect ratio will return the window to the current mode’s default size and shape for that window. Selecting “Best Fit” will automatically set the ratio based on the window’s current source resolution.

*Note: The “User” aspect ratio is not available in Matrix mode.*

- 7) Mirror:** Turning this switch on will flip the currently selected window/input horizontally.

- 8) Border:** This switch enables or disables the colour border around the currently selected window or input.

- 9) Border Colour:** Use the dropdown to select the colour to use for the border of the currently selected window/input. Available colours are: Black, red, green, blue, yellow, magenta, cyan, white, dark red, dark green, dark blue, dark yellow, dark magenta, dark cyan, gray.

- 10) Reset:** Reset the current window/input to its default settings based on the currently selected mode.

- 11) Visual Layout Window:** When in a multi-windowing mode, individual windows may be selected, moved and resized simply by clicking and dragging on them in the layout window. To select a window, click on it and the information will be displayed on the left. Click and drag the center of a window to reposition it. Click and drag the bottom right corner of a window to manually resize it. The results of a change will be displayed on the outputs as soon as the mouse button has been released.

*Note: Not available in Matrix mode.*

### 6.5.3 Picture Tab

This tab provides controls over each input's contrast, brightness, saturation, hue, and sharpness levels.

*Note: All picture settings are per-input and are mode-independent.*




- 1) **Input Select:** Use the dropdown to select the input to modify.
- 2) **Reset:** Reset the current input to its default settings.
- 3) **Contrast:** This slider provides control over the overall contrast of the currently selected source video.
- 4) **Brightness:** This slider provides control over the overall brightness of the currently selected source video.
- 5) **Saturation:** This slider provides control over the overall saturation of the currently selected source video.
- 6) **Hue:** This slider provides control over the hue shift of the currently selected source video.
- 7) **Sharpness H/V:** These sliders provide control over the amount of sharpness processing to apply to the currently selected source video.

*Note: Horizontal and vertical processing is independently controlled, providing finer control over the image quality.*

### 6.5.4 Audio Tab

This tab provides control over the audio output behavior of the unit, including routing selection and muting.

*Note: Due to Matrix mode only supporting a single “window”, changing modes between a multi-windowing mode and Matrix mode when an audio source is set to windows 2~4 will result in the source reverting to window 1.*

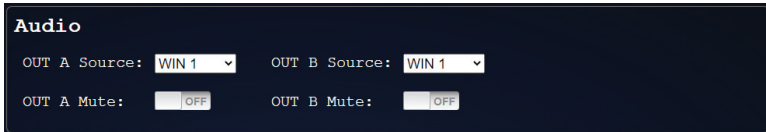

- 1) **OUT A Source:** Use the dropdown to choose the audio source to pair with video output A.
  - **IN 1~4:** Always use the audio from the specified input.
  - **WIN 1~4:** Always use audio from the source currently displayed in the specified window.

*Note: WIN 2~4 is not available as a source in Matrix mode.*
- 2) **OUT B Source:** Use the dropdown to choose the audio source to pair with video output A.
  - **IN 1~4:** Always use the audio from the specified input.
  - **WIN 1~4:** Always use audio from the source currently displayed in the specified window.

*Note: WIN 2~4 is not available as a source in Matrix mode.*
- 3) **OUT A Mute:** Click the switch to toggle between muted and unmuted audio on output A.
- 4) **OUT B Mute:** Click the switch to toggle between muted and unmuted audio on output A.

### 6.5.5 Input EDID Tab

This unit provides the option of three standard EDIDs, two sink sourced EDIDs and four user uploaded EDIDs that can be assigned to all inputs at the same time, or to each input independently.

*Note: In most cases, assigning a new EDID to an input will cause the affected input to briefly blink out while the source adapts to the new information.*

- 1) **EDID Mode:** Use the dropdown to select how to assign EDIDs to the unit’s inputs. Selecting “Independent” allows for a different EDID to be assigned to each input, selecting “All” allows for a single EDID to be assigned to all inputs.
- 2) **All EDID:** Select the EDID to assign to all inputs.  
*Note: Only available in “All” EDID Mode.*
- 3) **IN 1~4 EDID:** Select the EDID to assign to the specified input.  
*Note: Only available in “Independent” EDID Mode.*
- 4) **User 1~4 Update:** To update any of the unit’s 4 User EDIDs, click the “Choose File” button to open the file selection window and then select the EDID file (\*.bin format) located on your local PC. After selecting the file, click the “Update” button to begin the EDID upload process.

*Note: In some rare cases it is possible for custom or external EDIDs to cause compatibility issues with certain sources. If this happens, it is recommended to switch to one of the 3 default EDIDs for maximum compatibility.*

## 6.5.6 HDCP Mode Tab

This tab provides control over the HDCP settings for all inputs.



The screenshot shows two configuration panels. The top panel, titled "HDCP Mode", contains four dropdown menus labeled "Input 1:", "Input 2:", "Input 3:", and "Input 4:". Each dropdown menu is currently set to "Refer to Source". The bottom panel, titled "HDCP Status", contains eight buttons labeled "OUT A:", "OUT B:", "Win 1:", "Win 2:", "Win 3:", and "Win 4:". Each button is currently set to "Normal".

- 1) **HDCP Mode Input 1~4:** Use the dropdown to select the HDCP behavior for each input.
  - **HDCP Support Off:** Completely disables support for HDCP on that input.
  - **Refer to Source:** Makes the input port support the same HDCP version as required by the connected source.
  - **Refer to Display:** Makes the input support the HDCP version of the currently connected displays.

### 6.5.7 OSD Settings Tab

This tab provides control over the behavior of the OSD menu and informational display.



**OSD Settings**

Menu Position:

Menu Timeout:

Info. Timeout:

Info. Display:  ON

Menu Transparency:


Menu Background:

- 1) Menu Position:** Use the dropdown to set the position of the OSD menu on the output. Available choices are: Top Left, Top Right, Bottom Right, and Bottom Left.
- 2) Menu Timeout:** Set the length of time, in seconds, that the OSD menu will continue to be displayed if there is no user input, or disable the timeout completely.
- 3) Info. Timeout:** Set the length of time, in seconds, that the informational OSD will be displayed after a signal or source change, or disable the timeout completely.
- 4) Info. Display:** Enable or disable the informational OSD.
- 5) Menu Transparency:** Set the transparency level of the background of the OSD menu with a range from Off (opaque) to 10 (mostly transparent).
- 6) Menu background:** Set the colour of the background of the OSD menu. Available choices are: Gray, Black, and Blue.



### 6.5.8 Logo Settings Tab

This tab provides control over the user uploaded logo graphic. Controls include positioning, an uploading a new logo directly from the WebGUI and an option to reset the logo to a built in default image that can be used for testing.

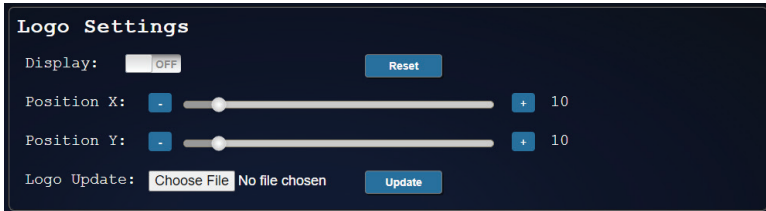

- 1) **Display:** Enable or disable displaying the logo graphic.
- 2) **Reset:** Resets the logo and installs a default test image.

*Note: The reset process can take a few moments. Progress information will be displayed on the OSD while the default logo is being installed. The unit will automatically reboot when it is finished.*

- 3) **Position X/Y:** Sets the position of the logo's upper left corner, within the output. The position values are a relative percentage of the available output resolution.
- 4) **Logo Update:** To upload a graphic logo, please click the "Choose File" button to open the file selection window and then select the graphic logo file (8-bit \*.bmp format, 960×540 max resolution) located on your local PC. After selecting the file, click the "Update" button to upload the logo to the unit.

*Note: The upload process can take a while, depending on the size of the logo. Progress information will be displayed on the OSD while the logo is being installed. The unit will automatically reboot when it is finished.*

### 6.5.9 Ethernet Tab

This tab provides controls to change the network settings for the unit. You can manually set the IP address, netmask and gateway address in “Static IP” mode, or you can obtain an IP address automatically by enabling DHCP.

*Note: The unit’s default Static IP address is 192.168.1.50. If the IP address is changed then the IP address required for WebGUI/Telnet access will also change accordingly.*

**Ethernet**

IP Mode: **STATIC**

**Static IP configuration**

Static IP Address: 192 . 168 . 1 . 50

Static Subnet Mask: 255 . 255 . 255 . 0

Static Gateway: 192 . 168 . 1 . 254 **Save**

**Link Status**

IP Mode: **DHCP**

IP Address: 192 . 168 . 10 . 110

Subnet Mask: 255 . 255 . 255 . 0

Gateway: 192 . 168 . 10 . 1

MAC Address: : : : : : :

- 1) **IP Mode:** Click this button to toggle between the Static IP and DHCP modes. In DHCP mode, the unit will attempt to automatically obtain its IP configuration details from a local DHCP server. In Static mode the unit will use the manually assigned IP configuration information.
- 2) **Static IP Config:** When the unit is in Static IP mode the IP address, netmask and gateway addresses may be manually set here. Click “Save” to apply and use the newly entered address.
- 3) **Link Status:** Displays the unit’s current IP configuration and the unit’s MAC address.

### 6.5.10 Setup Tab

Provides a way to update firmware and reset various sections within the unit. Control over the unit's Auto Sync Off feature, storing/recalling presets as well as configuring the WebGUI login settings is also provided here.

The screenshot shows two sections of the WebGUI interface. The top section, titled "Setup", contains the following controls:
 

- Preset Save:** A dropdown menu set to "Preset 1" and a "Save" button.
- Preset Recall:** A dropdown menu set to "Preset 1" and a "Recall" button.
- Auto Sync Off:** A dropdown menu set to "Always On".
- F/W:** A "Choose File" button, the text "No file chosen", and an "Update" button.
- User EDID:** A "Reset" button.
- Factory:** A "Reset" button.

 The bottom section, titled "Web Login Settings", contains:
 

- Username:** A text input field containing "admin" and a "Save" button.
- Password:** A password input field with masked characters ".....".
- Confirm Password:** A password input field with masked characters ".....".
- Timeout:** A text input field containing "0" and a "Save" button.

- 1) **Preset Save:** Select a preset from the dropdown list and then click the "Save" button to store the unit's current video window configuration to the currently selected preset.
- 2) **Preset Recall:** Select a preset from the dropdown list and then click the "Recall" button to activate the currently selected preset.

*Note: this can also be achieved by selecting a Preset from the Video Mode dropdown at the top of the WebGUI.*


- 3) **Auto Sync Off:** Sets the amount of time to continue outputting sync with a black screen if there are no live sources and no operations have been executed on the unit. Setting this to "Always On" forces the unit to always output sync.
- 4) **Firmware Update:** To update the unit's firmware, click the "Choose File" button to open the file selection window and then select the firmware update file (\*.bin format) located on your local PC. After selecting the file, click the "Upgrade" button to begin the firmware update process. After the upgrade is complete, the unit will reboot automatically.

- 5) **User EDID Reset:** Press this button to reset the unit's User EDIDs to their factory default states.
- 6) **Factory Reset:** Press this button to reset the unit to its factory default state. After the reset is complete, the unit will reboot automatically.
- 7) **Web Login Settings:** WebGUI login settings can be set here.
  - **Username/Password:** To change the login username and password, enter the new information in the spaces provided and press "Save".

*Note:* The default user name and password is "admin".
  - **Timeout:** Set the length of time to wait, in minutes, before logging out a user due to inactivity. Setting this to "0" disables the timeout.

### 6.5.11 Information Tab

This tab displays the unit's serial number as well as the current firmware versions.

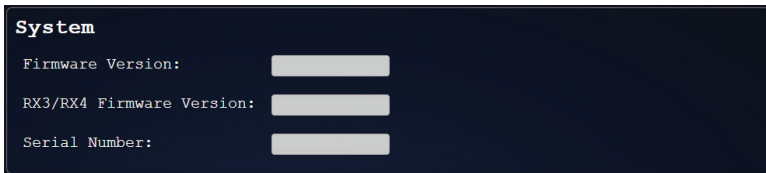

## 6.6 Telnet Control

Before attempting to use Telnet control, please ensure that both the unit and the PC are connected to the same active networks.

To Access the Command Line Interface (CLI)	
Windows 7	Click <b>Start</b> , type “cmd” in the search field, and press <b>Enter</b> .
Windows XP	Click <b>Start</b> > <b>Run</b> , type “cmd”, and press <b>Enter</b> .
Mac OS X	Click <b>Go</b> > <b>Applications</b> > <b>Utilities</b> > <b>Terminal</b> .

Once in the Command Line Interface (CLI) type “**telnet**” followed by the IP address of the unit (and the port number if it is non-standard) and then hit “**Enter**”. This will connect us to the unit we wish to control.

```
Microsoft Windows [Version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\Administrator>telnet 192.168.1.50 23
```

*Note 1: If the IP address is changed then the IP address required for Telnet access will also change accordingly.*

*Note 2: The default IP address is 192.168.1.50.*

## 6.7 Serial and Telnet Commands

COMMAND
Description and Parameters
<p><b>help</b> ←</p> <p>Show the full command list.</p>
<p><b>help N1</b> ←</p> <p>Show details about the specified command.</p> <p><b>N1</b> = {Command}</p>
<p><b>?</b> ←</p> <p>Show the full command list.</p>
<p><b>? N1</b> ←</p> <p>Show details about the specified command.</p> <p><b>N1</b> = {Command}</p>
<p><b>get fw ver</b> ←</p> <p>Show the unit's current firmware version.</p>
<p><b>get command ver</b> ←</p> <p>Show the unit's current command version.</p>
<p><b>get mac addr</b> ←</p> <p>Show the unit's MAC address.</p>
<p><b>get model name</b> ←</p> <p>Show the unit's model name.</p>
<p><b>get model type</b> ←</p> <p>Show the unit's product type.</p>

COMMAND				
Description and Parameters				
<p><b>set feedback broadcast N1</b> ←</p> <p>Enable or disable the broadcast of console command feedback.</p> <p>Available values for <b>N1</b>:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">ON</td> <td>[Enabled]</td> </tr> <tr> <td>OFF</td> <td>[Disabled]</td> </tr> </table>	ON	[Enabled]	OFF	[Disabled]
ON	[Enabled]			
OFF	[Disabled]			
<p><b>get feedback broadcast</b> ←</p> <p>Show the current console command feedback broadcast state.</p>				
<p><b>set ip mode N1</b> ←</p> <p>Set the IP address assignment mode.</p> <p>Available values for <b>N1</b>:</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">STATIC</td> <td>[Static IP mode]</td> </tr> <tr> <td>DHCP</td> <td>[DHCP mode]</td> </tr> </table>	STATIC	[Static IP mode]	DHCP	[DHCP mode]
STATIC	[Static IP mode]			
DHCP	[DHCP mode]			
<p><b>get ip mode</b> ←</p> <p>Show the current IP address assignment mode.</p>				
<p><b>get ipconfig</b> ←</p> <p>Show the unit's current IP configuration information.</p>				
<p><b>get ipaddr</b> ←</p> <p>Show the unit's current IP address.</p>				
<p><b>get netmask</b> ←</p> <p>Show the unit's current netmask.</p>				
<p><b>get gateway</b> ←</p> <p>Show the unit's current gateway address.</p>				
<p><b>set static ipaddr N1</b> ←</p> <p>Set the unit's static IP address.</p> <p><b>N1</b> = X.X.X.X                      [X = 0~255, IP address]</p>				

COMMAND
Description and Parameters
<p><b>get static ipaddr</b> ←</p> <p>Show the unit's static IP address.</p>
<p><b>set static netmask N1</b> ←</p> <p>Set the unit's static IP address.</p> <p><b>N1</b> = X.X.X.X                      [X = 0~255, Netmask]</p>
<p><b>get static netmask</b> ←</p> <p>Show the unit's static netmask.</p>
<p><b>set static gateway N1</b> ←</p> <p>Set the unit's static IP address.</p> <p><b>N1</b> = X.X.X.X                      [X = 0~255, Gateway address]</p>
<p><b>get static gateway</b> ←</p> <p>Show the unit's static gateway address.</p>
<p><b>set webgui username N1</b> ←</p> <p>Set the WebGUI login username.</p> <p><b>N1</b> = {Username}                      [16 characters max]</p>
<p><b>get webgui username</b> ←</p> <p>Show the current WebGUI login username</p>
<p><b>set webgui password N1</b> ←</p> <p>Set the WebGUI login password.</p> <p><b>N1</b> = {Password}                      [16 characters max]</p>
<p><b>get webgui password</b> ←</p> <p>Show the current WebGUI login password.</p>



COMMAND
Description and Parameters
<p><b>set webgui login timeout N1</b> ←</p> <p>Set the WebGUI inactivity timeout value.</p> <p><b>N1</b> = 0~240 [Minutes]</p>
<p><b>get webgui login timeout</b> ←</p> <p>Show the current WebGUI inactivity timeout value.</p>
<p><b>set telnet login N1</b> ←</p> <p>Enable or disable allowing Telnet logins.</p> <p>Available values for <b>N1</b>:</p> <p>ON [Enabled] OFF [Disabled]</p>
<p><b>get telnet login</b> ←</p> <p>Show the current state of Telnet login allowance.</p>
<p><b>set telnet username N1</b> ←</p> <p>Set the Telnet login username.</p> <p><b>N1</b> = {Username} [16 characters max]</p>
<p><b>get telnet username</b> ←</p> <p>Show the current Telnet login username.</p>
<p><b>set telnet password N1</b> ←</p> <p>Set the Telnet login password.</p> <p><b>N1</b> = {Password} [16 characters max]</p>
<p><b>get telnet password</b> ←</p> <p>Show the unit's Telnet access port.</p>

COMMAND	
Description and Parameters	
<b>set window layout mode N1</b> ↵	
Set the window layout mode.	
Available values for <b>N1</b> :	
0	[Matrix mode]
1	[PiP mode]
2	[PoP mode]
3	[Quad mode]
4	[Preset 1]
5	[Preset 2]
6	[Preset 3]
7	[Preset 4]
<b>get window layout mode</b> ↵	
Show the window current layout mode.	
<b>set window N1 route N2</b> ↵	
Set the input to route to the specified window.	
<b>N1</b> = 1~4	[Window number]
<b>N2</b> = 1~4	[Input port]
<i>Note: Valid in multi-windowing modes only.</i>	
<b>get window N1 route</b> ↵	
Show the input currently routed to the specified window.	
<b>N1</b> = 1~4	[Window number]
<i>Note: Valid in multi-windowing modes only.</i>	
<b>set out N1 route N2</b> ↵	
Route the specified input to the specified output.	
<b>N1</b> = A~B	[Output port]
<b>N2</b> = 1~4	[Input port]
<i>Note: Valid in matrix mode only.</i>	

**COMMAND****Description and Parameters****get out N1 route** ←

Show the current input routed to the specified output.

**N1** = A~B [Output port]

*Note: Valid in matrix mode only.*

**set window N1 display N2** ←

Enable or disable the specified window.

**N1** = 1~4 [Window number]

Available values for **N2**:

ON [Enabled]

OFF [Disabled]

*Note: Valid in multi-windowing modes only.*

**get window N1 display** ←

Show the visibility status of the specified window,

**N1** = 1~4 [Window number]

*Note: Valid in multi-windowing modes only.*

**set window N1 hposition N2** ←

Set the horizontal position of the specified window.

**N1** = 1~4 [Window number]

**N2** = 0~{Max res} [Horizontal size]

*Note: Valid in multi-windowing modes only.*

**get window N1 hposition** ←

Show the current horizontal position of the specified window.

**N1** = 1~4 [Window number]

*Note: Valid in multi-windowing modes only.*



COMMAND
<b>Description and Parameters</b>
<b>get window N1 vsize</b> ← Show the current vertical size of the specified window. <b>N1</b> = 1~4 [Window number] <i>Note: Valid in multi-windowing modes only.</i>
<b>set window N1 priority N2</b> ← Set the priority of the specified window. <b>N1</b> = 1~4 [Window number] <b>N2</b> = 1~4 [Priority] <i>Note: Valid in multi-windowing modes only.</i>
<b>get window N1 priority</b> ← Show the current priority of the specified window. <b>N1</b> = 1~4 [Window number] <i>Note: Valid in multi-windowing modes only.</i>
<b>set window N1 aspect N2</b> ← Set the aspect of the specified window. <b>N1</b> = 1~4 [Window number] Available values for <b>N2</b> : 1 [Full] 2 [16:9] 3 [16:10] 4 [4:3] 5 [Best Fit] 6 [User]
<b>get window N1 aspect</b> ← Show the current aspect of the specified window. <b>N1</b> = 1~4 [Window number]

COMMAND	
Description and Parameters	
<b>set window N1 mirror N2↵</b>	
Set the mirror mode of the specified window.	
<b>N1</b> = 1~4	[Window number]
Available values for <b>N2</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get window N1 mirror↵</b>	
Show the current mirror mode of the specified window.	
<b>N1</b> = 1~4	[Window number]
<b>set window N1 border N2↵</b>	
Set the border mode of the specified window.	
<b>N1</b> = 1~4	[Window number]
Available values for <b>N2</b> :	
ON	[Enabled]
OFF	[Disabled]
<b>get window N1 border↵</b>	
Show the current border mode of the specified window.	
<b>N1</b> = 1~4	[Window number]

## COMMAND

### Description and Parameters

#### set window N1 border color N2↵

Set the border colour of the specified window.

**N1** = 1~4 [Window number]

Available values for **N2**:

1	[Black]
2	[Red]
3	[Green]
4	[Blue]
5	[Yellow]
6	[Magenta]
7	[Cyan]
8	[White]
9	[Dark Red]
10	[Dark Green]
11	[Dark Blue]
12	[Dark Yellow]
13	[Dark Magenta]
14	[Dark Cyan]
15	[Gray]

#### get window N1 border color↵

Show the current border colour of the specified window.

**N1** = 1~4 [Window number]

#### set window N1 reset↵

Reset the settings of the specified window

**N1** = 1~4 [Window number]

#### set in N1 contrast N2↵

Set the contrast level of the specified input.

**N1** = 1~4 [Input port]

**N2** = 0~100 [Contrast level]





COMMAND	
Description and Parameters	
<b>get in N1 hue</b> ↵	
Show the current hue value of the specified input.	
<b>N1</b> = 1~4	[Input port]
<b>set in N1 sharpness h N2</b> ↵	
Set the horizontal sharpness level of the specified input.	
<b>N1</b> = 1~4	[Input port]
<b>N2</b> = 0~20	[Horizontal sharpness level]
<b>get in N1 sharpness h</b> ↵	
Show the current horizontal sharpness level of the specified input.	
<b>N1</b> = 1~4	[Input port]
<b>set in N1 sharpness v N2</b> ↵	
Set the vertical sharpness level of the specified input.	
<b>N1</b> = 1~4	[Input port]
<b>N2</b> = 0~20	[Vertical sharpness level]
<b>get in N1 sharpness v</b> ↵	
Show the current vertical sharpness level of the specified input.	
<b>N1</b> = 1~4	[Input port]
<b>set in N1 picture reset</b> ↵	
Set the picture settings reset.	
<b>N1</b> = 1~4	[Input port]

COMMAND	
Description and Parameters	
<b>set audio out N1 mute N2</b> ↵↵	
Enable or disable muting the specified audio output.	
<b>N1</b> = A~B	[Output port]
Available values for <b>N2</b> :	
ON	[Mute]
OFF	[Unmute]
<b>get audio out N1 mute</b> ↵↵	
Show the current mute state of the specified output.	
<b>N1</b> = A~B	[Output port]
<b>set audio out N1 route N2</b> ↵↵	
Route the specified audio source to the specified audio output.	
<b>N1</b> = A~B	[Output port]
Available values for <b>N2</b> :	
1	[Input 1]
2	[Input 2]
3	[Input 3]
4	[Input 4]
5	[Window 1]
6	[Window 2]
7	[Window 3]
8	[Window 4]
<b>get audio out N1 route</b> ↵↵	
Show the current audio source routed to the specified audio output.	
<b>N1</b> = A~B	[Output port]

## COMMAND

### Description and Parameters

#### set all in edid mode N1 ↵

Select the EDID management mode to use (All or Independent) for all inputs.

Available values for **N1**:

- |   |                    |
|---|--------------------|
| 1 | [All mode]         |
| 2 | [Independent mode] |

#### get all in edid mode ↵

Show the current EDID management mode used by all inputs.

#### set all in edid N1 ↵

Set the EDID to use when the "All" EDID mode is active.

Available values for **N1**:

- |    |                     |
|----|---------------------|
| 1  | [1080p60 2-Channel] |
| 2  | [4Kp30 2-Channel]   |
| 3  | [4Kp60 2-Channel]   |
| 7  | [User 1]            |
| 8  | [User 2]            |
| 9  | [User 3]            |
| 10 | [User 4]            |
| 15 | [Sink A]            |
| 16 | [Sink B]            |

#### get all in edid ↵

Show the current EDID used by the "All" EDID mode.

COMMAND	
Description and Parameters	
<b>set in N1 edid N2</b> ↵	
Set the EDID to use on the specified input.	
<b>N1</b> = 1~4	[Input port]
Available values for <b>N2</b> :	
1	[1080p60 2-Channel]
2	[4Kp30 2-Channel]
3	[4Kp60 2-Channel]
7	[User 1]
8	[User 2]
9	[User 3]
10	[User 4]
15	[Sink A]
16	[Sink B]
<b>get in N1 edid</b> ↵	
Show the EDID currently being used on the specified input.	
<b>N1</b> = 1~4	[Input port]
<b>set user edid N1 update</b> ↵	
Upload a new EDID for use as the specified User EDID.	
<b>N1</b> = 1~4	[User EDID number]
<b>set in N1 hdcp mode N2</b> ↵	
Set the HDCP behavior of the specified input.	
<b>N1</b> = 1~4	[Input port]
Available values for <b>N2</b> :	
0	[HDCP off]
1	[Refer to Source]
2	[Refer to Display]



COMMAND	
Description and Parameters	
23	[1920x1080p60]
24	[1920x1200rb]
25	[2048x1152rb]
26	[3840x2160p24]
27	[3840x2160p25]
28	[3840x2160p30]
29	[4K p24 DCI]
30	[4K p25 DCI]
31	[4K p30 DCI]
32	[4K p50 DCI]
33	[4K p59 DCI]
34	[4K p60 DCI]
35	[3840x2160p50]
36	[3840x2160p59]
37	[3840x2160p60]
38	[3840x2400p60rb]
39	[Native OUT A]
40	[Native OUT B]
<b>get out A timing</b> ←	
Show the current resolution used by both outputs.	
<b>set out A osd position N1</b> ←	
Set the OSD menu location.	
Available values for <b>N1</b> :	
0	[Top Left]
1	[Top Right]
2	[Bottom Right]
3	[Bottom Left]
<b>get out A osd position</b> ←	
Show the current OSD menu location.	

COMMAND					
Description and Parameters					
<b>set out A osd timeout N1</b> ←	<p>Set the OSD menu's timeout value (in seconds).</p> <p>Available values for <b>N1</b>:</p> <table> <tr> <td>OFF</td> <td>[Disabled]</td> </tr> <tr> <td>5~60</td> <td>[Timeout in seconds]</td> </tr> </table>	OFF	[Disabled]	5~60	[Timeout in seconds]
OFF	[Disabled]				
5~60	[Timeout in seconds]				
<b>get out A osd timeout</b> ←	<p>Show the current OSD menu's timeout value.</p>				
<b>set out A osd info display N1</b> ←	<p>Enable or disable the info OSD.</p> <p>Available values for <b>N1</b>:</p> <table> <tr> <td>ON</td> <td>[Enabled]</td> </tr> <tr> <td>OFF</td> <td>[Disabled]</td> </tr> </table>	ON	[Enabled]	OFF	[Disabled]
ON	[Enabled]				
OFF	[Disabled]				
<b>get out A osd info display</b> ←	<p>Show the current info OSD state.</p>				
<b>set out A osd info timeout N1</b> ←	<p>Set the OSD info's timeout value (in seconds).</p> <p>Available values for <b>N1</b>:</p> <table> <tr> <td>OFF</td> <td>[Disabled]</td> </tr> <tr> <td>5~60</td> <td>[Timeout in seconds]</td> </tr> </table>	OFF	[Disabled]	5~60	[Timeout in seconds]
OFF	[Disabled]				
5~60	[Timeout in seconds]				
<b>get out A osd info timeout</b> ←	<p>Show the current OSD info's timeout value.</p>				
<b>set out A osd transparency N1</b> ←	<p>Set the transparency level of the OSD.</p> <table> <tr> <td><b>N1</b> = 0~10</td> <td>[Transparency level]</td> </tr> </table>	<b>N1</b> = 0~10	[Transparency level]		
<b>N1</b> = 0~10	[Transparency level]				






COMMAND	
Description and Parameters	
<b>get out A osd logo vposition</b> ←	
	Show the current vertical position of the graphical logo overlay.
<b>set osd logo default</b> ←	
	Resets the logo and installs a default test image.
<b>set osd logo update</b> ←	
	Initiates the logo update process via USB.
<b>set save preset N1</b> ←	
	Saves the current unit's settings to the specified preset.
<b>N1</b> = 1~4	[Preset number]
<b>set auto sync off N1</b> ←	
	Enable or disable the Auto Sync Off function and set the timeout length.
	Available values for <b>N1</b> :
0	[Always on]
1	[5 seconds]
2	[10 seconds]
3	[15 seconds]
4	[30 seconds]
5	[1 minutes]
6	[1.5 minutes]
7	[2 minutes]
8	[2.5 minutes]
9	[3 minutes]
10	[5 minutes]
11	[10 minutes]
<b>get auto sync off</b> ←	
	Show the current Auto Sync Off settings.

COMMAND
Description and Parameters
<b>set firmware update</b> ↵ Initiates the firmware update process via USB.
<b>set factory user edid default</b> ↵ Restore the unit's User EDIDs to their factory default settings.
<b>set factory ipconfig default</b> ↵ Reset the unit's network settings to the factory defaults.
<b>set factory default</b> ↵ Restore the unit's settings, except for User EDIDs, to the their factory default settings.

*Note: Commands will not be executed unless followed by a carriage return. Commands are not case-sensitive.*

#### 6.6 WebGUI Control

# 7. CONNECTION DIAGRAM

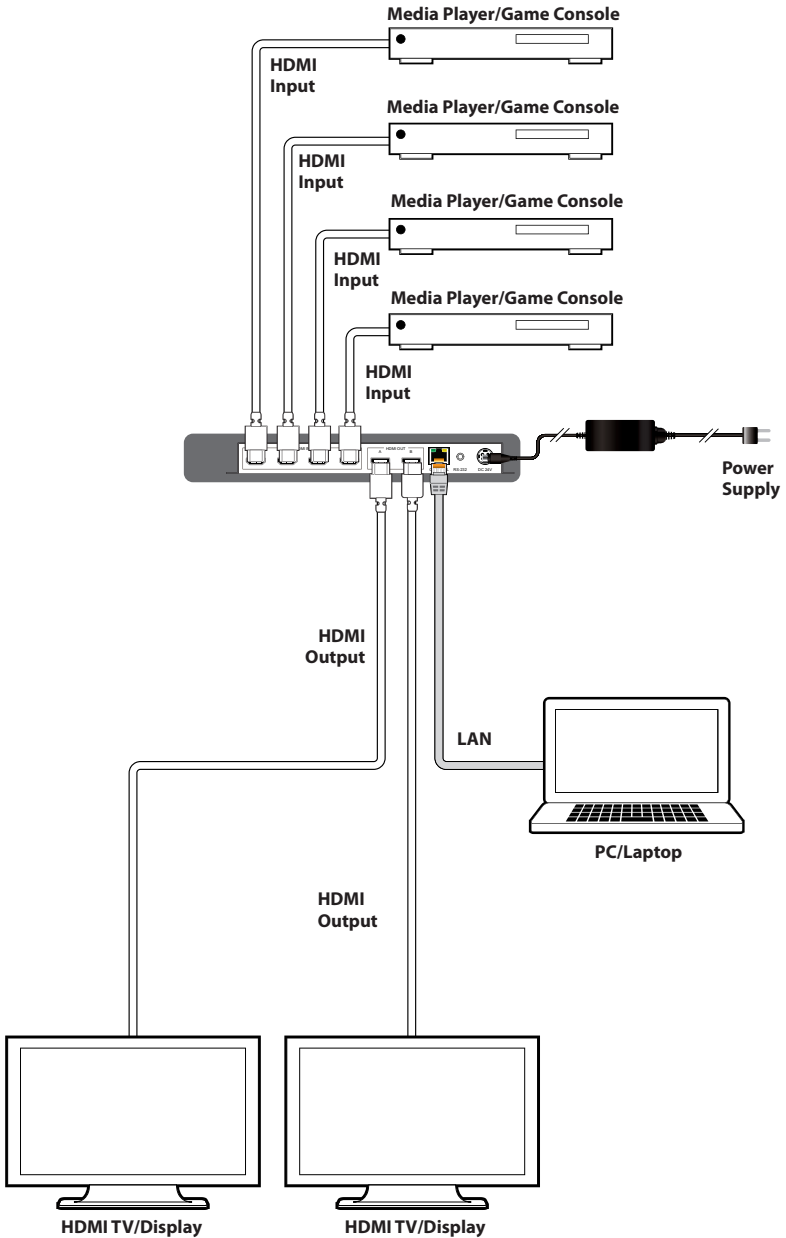

## 8. SPECIFICATIONS

### 8.1 Technical Specifications

<b>HDMI Bandwidth</b>	18Gbps
<b>Input Ports</b>	4×HDMI (Type-A)
<b>Output Ports</b>	2×HDMI (Type-A)
<b>Control Ports</b>	1×RS-232 (3.5mm) 1×IP Control (RJ-45)
<b>Service Port</b>	1×USB 2.0 (Type A)
<b>Baud Rate</b>	19200
<b>Power Supply</b>	24V/2.7A DC (US/EU standards, CE/FCC/UL certified)
<b>ESD Protection (HBM)</b>	±8kV (Air Discharge) ±4kV (Contact Discharge)
<b>Dimensions (W×H×D)</b>	231.5mm×25mm×158mm [Case Only] 231.5mm×25mm×161mm [All Inclusive]
<b>Weight</b>	968g
<b>Chassis Material</b>	Metal (Steel)
<b>Chassis Colour</b>	Black
<b>Operating Temperature</b>	0°C – 40°C/32°F – 104°F
<b>Storage Temperature</b>	-20°C – 60°C/-4°F – 140°F
<b>Relative Humidity</b>	20 – 90% RH (Non-condensing)
<b>Power Consumption</b>	15.3W

## 8.2 Video Specifications

Supported Resolutions (Hz)	Input	Output
	HDMI	HDMI
<b>720×400p@70/85</b>	✓	×
<b>640×480p@60/72/75/85</b>	✓	60Hz
<b>720×480i@60</b>	✓	×
<b>720×480p@60</b>	✓	✓
<b>720×576i@50</b>	✓	×
<b>720×576p@50</b>	✓	✓
<b>800×600p@56/60/72/75/85</b>	✓	60Hz
<b>848×480p@60</b>	✓	×
<b>1024×768p@60/70/75/85</b>	✓	60Hz
<b>1152×864p@75</b>	✓	×
<b>1280×720p@50/60</b>	✓	✓
<b>1280×768p@60/75/85</b>	✓	60Hz
<b>1280×800p@60/75/85</b>	✓	60Hz
<b>1280×960p@60/85</b>	✓	60Hz
<b>1280×1024p@60/75/85</b>	✓	60Hz
<b>1360×768p@60</b>	✓	✓
<b>1366×768p@60</b>	✓	✓
<b>1400×1050p@60</b>	✓	✓
<b>1440×900p@60/75</b>	✓	60Hz
<b>1600×900p@60RB</b>	✓	✓
<b>1600×1200p@60</b>	✓	✓
<b>1680×1050p@60</b>	✓	✓
<b>1920×1080i@50/60</b>	✓	×

Supported Resolutions (Hz)	Input	Output
	HDMI	HDMI
<b>1920×1080p@24/25/30</b>	✓	✓
<b>1920×1080p@50/60</b>	✓	✓
<b>1920×1200p@60RB</b>	✓	✓
<b>2560×1440p@60RB</b>	✓	✗
<b>2560×1600p@60RB</b>	✓	✗
<b>2048×1080p@24/25/30</b>	✓	✗
<b>2048×1080p@50/60</b>	✓	✗
<b>3840×2160p@24/25/30</b>	✓	✓
<b>3840×2160p@50/60 (4:2:0)</b>	✓	✗
<b>3840×2160p@24, HDR10</b>	✗	✗
<b>3840×2160p@50/60 (4:2:0), HDR10</b>	✗	✗
<b>3840×2160p@50/60</b>	✓	✓
<b>3840×2400@60RB</b>	✗	✓
<b>4096×2160p@24/25/30</b>	✓	✓
<b>4096×2160p@50/60 (4:2:0)</b>	✓	✗
<b>4096×2160p@24, HDR10</b>	✗	✗
<b>4096×2160p@50/60 (4:2:0), HDR10</b>	✗	✗
<b>4096×2160p@50/60</b>	✓	✓

## 8.3 Audio Specifications

### 8.3.1 Digital Audio

HDMI Inputs 1~2/ All Outputs	
LPCM	
<b>Max Channels</b>	8 Channels
<b>Sampling Rate (kHz)</b>	32, 44.1, 48, 88.2, 96, 176.4, 192
Bitstream	
<b>Supported Formats</b>	Standard & High-Definition
HDMI Inputs 3~4	
LPCM	
<b>Max Channels</b>	2 Channels
<b>Sampling Rate (kHz)</b>	48
Bitstream	
<b>Supported Formats</b>	None

## 8.4 Cable Specifications

Cable Length	1080p		4K30	4K60
	8-bit	12-bit	(4:4:4) 8-bit	(4:4:4) 8-bit
<b>High Speed HDMI Cable</b>				
<b>HDMI Input</b>	15m	10m	5m	3m
<b>HDMI Output</b>	15m	10m	5m	3m

### Bandwidth Category Examples:

#### 1080p (FHD Video)

- Up to 1080p@60Hz, 12-bit colour
- Data rates lower than 5.3Gbps or below 225MHz TMDS clock

#### 4K30 (4K UHD Video)

- 4K@24/25/30Hz & 4K@50/60Hz (4:2:0), 8-bit colour
- Data rates higher than 5.3Gbps or above 225MHz TMDS clock but below 10.2Gbps

#### 4K60 (4K UHD+ Video)

- 4K@50/60Hz (4:4:4, 8-bit)
- 4K@50/60Hz (4:2:0, 10-bit HDR)
- Data rates higher than 10.2Gbps



## 9. ACRONYMS

ACRONYM	COMPLETE TERM
<b>ASCII</b>	American Standard Code for Information Interchange
<b>CLI</b>	Command-Line Interface
<b>DHCP</b>	Dynamic Host Configuration Protocol
<b>DVI</b>	Digital Visual Interface
<b>EDID</b>	Extended Display Identification Data
<b>Gbps</b>	Gigabits per second
<b>GUI</b>	Graphical User Interface
<b>HDCP</b>	High-bandwidth Digital Content Protection
<b>HDMI</b>	High-Definition Multimedia Interface
<b>HDTV</b>	High-Definition Television
<b>IP</b>	Internet Protocol
<b>kHz</b>	Kilohertz
<b>LAN</b>	Local Area Network
<b>LED</b>	Light-Emitting Diode
<b>LPCM</b>	Linear Pulse-Code Modulation
<b>MAC</b>	Media Access Control
<b>MHz</b>	Megahertz
<b>OSD</b>	On-Screen Display
<b>PiP</b>	Picture in Picture
<b>PoP</b>	Picture outside of Picture
<b>TCP</b>	Transmission Control Protocol
<b>TMDS</b>	Transition-Minimised Differential Signaling
<b>4K UHD</b>	4K Ultra-High-Definition (10.2Gbps max)
<b>4K UHD<sup>+</sup></b>	4K Ultra-High-Definition (18Gbps max)

<b>ACRONYM</b>	<b>COMPLETE TERM</b>
<b>UHDTV</b>	Ultra-High-Definition Television
<b>USB</b>	Universal Serial Bus
<b>VGA</b>	Video Graphics Array
<b>WUXGA (RB)</b>	Widescreen Ultra Extended Graphics Array (Reduced Blanking)
<b>XGA</b>	Extended Graphics Array





---

CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue, Shepperton,  
Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: [sales@cypeurope.com](mailto:sales@cypeurope.com)

[www.cypeurope.com](http://www.cypeurope.com)

v1.01