



HDCP 2.2
4K2K



QU-14S-4K22

1 to 4 HDMI Distribution Amplifier
(4K & HDCP 2.2 support)

OPERATION MANUAL

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2011 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1 August 2011

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE	SUMMARY OF CHANGE
v1.00	17/04/2015	First release

CONTENTS

1. Introduction	6
2. Applications	6
3. Package Contents	6
4. System Requirements	6
5. Features.....	7
6. Operation Controls and Functions	8
6.1 Front Panel	8
6.2 Rear Panel.....	9
7. Connection Diagram	10
8. Specifications.....	11
8.1 Technical Specifications	11
8.2 Supported Resolutions.....	12
9. Acronyms.....	12

1. INTRODUCTION

The QU-14S-4K Distribution Amplifier (splitter) accepts one HDMI input and splits this signal to four identical outputs. This device is v1.4 HDMI compliant and supports HDCP (including HDCP 2.2), 3D Video signals and 'Deep Colour', and 4K resolutions, together with High Definition Audio. Each buffered output can run 1080p/8-bit up to 20 metres and can also be cascaded up to 3 layers.

2. APPLICATIONS

- /// Simultaneously display an HDMI source on 4 TVs/projectors
- /// Showroom display
- /// University lecture hall display
- /// Retail sales displays

3. PACKAGE CONTENTS

- /// 1×1 by 4 HDMI 4K UHD Splitter
- /// 1×5V/2.6 A Power Adaptor
- /// 1×Operation Manual

4. SYSTEM REQUIREMENTS

HDMI source device such as a DVD/Blu-ray player and HDMI equipped display (TVs/monitors) with High Speed HDMI cables.

5. FEATURES

- /// v1.4 HDMI, HDCP compliant (including HDCP 2.2) and DVI 1.0 compliant
- /// HDMI 1 to 4 Splitter
- /// Supports resolutions VGA~WUXGA, 480i~1080p, 4K UHD@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2), 4K UHD@ 60Hz (YUV 4:2:0), 4K/2K@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2) and 4K/2K@ 60Hz (YUV 4:2:0) dependent upon the output display's EDID settings
- /// High Definition Audio Supported:: Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio plus LPCM
- /// Auto signal amplification & equalisation improves signal transmission distances
- /// Supports CEC bypass
- /// Supports Deep Colour
- /// Selectable EDID settings - TV (downstream) and STD (fixed)
- /// Power, HDMI/DVI, HDCP & SYNC plus independent output LED's indicator
- /// Supports xvYCC
- /// Supports 3D signals
- /// 19" Rack Mountable (1U)

Note: For playback of 4K2K HDMI source signals, a 4K2K capable display and High Speed HDMI cables are required.


6. OPERATION CONTROLS AND FUNCTIONS

6.1 Front Panel



- ① **POWER:** This LED will illuminate when the unit is connected to an active power supply and switched on.
- ② **SYNC IN:** This LED will illuminate when the unit is connected with active signal from the source device.
- ③ **HDCP 2.2 IN:** This LED will illuminate when the source signal is HDCP 2.2 encrypted.
- ④ **SYNC OUT 1~4:** These LEDs will illuminate when the output detects a connected display.
- ⑤ **HDCP 2.2 OUT 1~4:** These LEDs will illuminate when the connected HDMI display are HDCP 2.2 compatible.

6.2 Rear Panel

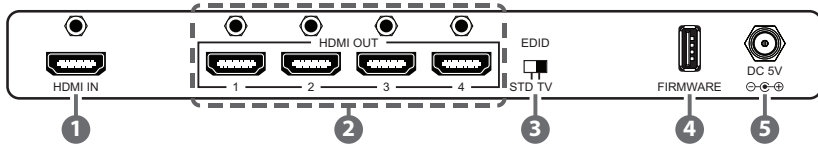

- 1 **HDMI IN:** Connect this input to the HDMI or DVI output of your source device such as a DVD player or Set-top Box with an HDMI cable.
- 2 **HDMI OUT 1~4:** Connect to an HDMI equipped display (TV/monitor) or HD Amplifier for simultaneous HDMI distribution.
- 3 **EDID TV/STD:** Use this switch to set HDMI EDID setting.

TV: When in 'TV' mode, the unit will read the EDID settings of the display connected to HDMI OUT 1. If it detects a 4K2K capable EDID setting it will transmit the signal in that format to all outputs. If no 4K2K capable EDID setting is detected then the unit will output the best resolution that all displays can support.


Note: When Output 1 is connected to a 4K2K display and Outputs 2~4 are connected to non-4K2K displays no picture may be displayed. To ensure proper display all screens must all be capable of displaying the same resolution.

STD: When in 'STD' mode, the unit will use its own built-in EDID settings. In this mode, the video output will be set to 1080p@60Hz and the audio output at LPCM 2CH Stereo. Use this mode if there are display problems in 'TV' Mode.

Note: The unit will retain and use the EDID settings of the last display connected to the HDMI OUT 1 output if no display is connected to this output even after switching EDID modes or a power cycle.

- 4 **FIRMWARE:** Manufacturer use only.
- 5 **DC 5V:** Plug the supplied power supply into the unit and connect the adaptor to an AC outlet.

7. CONNECTION DIAGRAM

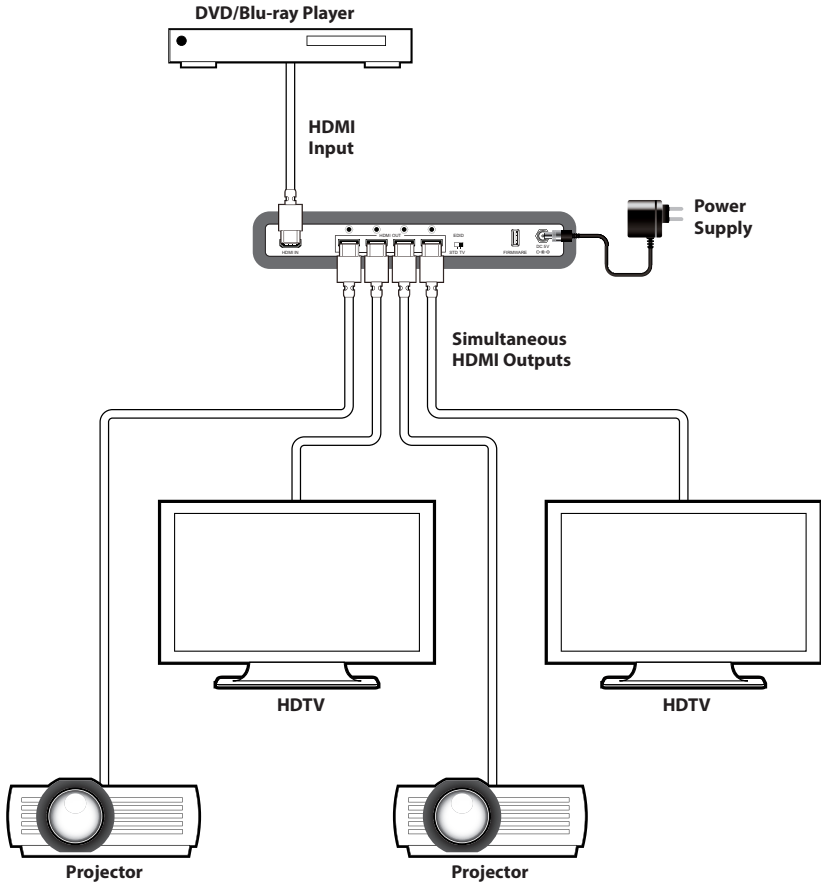

8. SPECIFICATIONS

8.1 Technical Specifications

Video Bandwidth	300 MHz/9 Gbps
Input Ports	1×HDMI
Output Ports	4×HDMI
HDMI Cable Distance	1080p@8/12-bit - 10 m 4K (3840×2160p@24) - 5 m
Power Supply	5V/2.6 A DC (US/EU standards, CE/FCC/UL certified)
ESD Protection	Human body model: ±8kV (air-gap discharge) ±4kV (contact discharge)
Dimensions	220 mm (W)×121 mm (D)×27 mm (H)/Jacks Excluded 220 mm (W)×127.25 mm (D)×28.3 mm (H)/Jacks Included
Weight	368 g
Chassis Material	Metal
Colour	Black
Operating Temperature	0 °C~40 °C/32 °F~104 °F
Storage Temperature	-20 °C~60 °C/-4 °F~140 °F
Relative Humidity	20~90 % RH (no condensation)
Power Consumption	5.83 W

8.2 Supported Resolutions

RESOLUTION	INPUT	OUTPUT
640×480@60/72/75	√	√
720×480@60	√	√
720×576p@50	√	√
800×600@60/72/75	√	√
1024×768@60/70/75	√	√
1280×720@50/60	√	√
1280×720p@60	√	√
1280×768@60	√	√
1280×800@60	√	√
1280×1024@60	√	√
1360×768@60	√	√
1600×1200@60	√	√
1920×1080i@50/60	√	√
1920×1080p@24/25/30/50/60	√	√
1920×1200@60 (RB)	√	√
3840×2160@24/25/30	√	√
3840×2160@50/60 (YUV420)	√	√
4096×2160@24/25/30	√	√
4096×2160@50/60 (YUV420)	√	√

9. ACRONYMS

ACRONYM	COMPLETE TERM
DTS	Digital Theater System
EDID	Extended Display Identification Data
HDCP	High-bandwidth Digital Content Protection
HDMI	High-Definition Multimedia Interface
HDTV	High Definition Television



CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue, Shepperton,
Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: sales@cypeurope.com

www.cypeurope.com

v1.00