



4K HDR

HDCP 2.2

HDMI[®]
HIGH-DEFINITION MULTIMEDIA INTERFACE



EL-31TT-4K22

**3-Way HDMI Tabletop Switching Module Kit
(4K, HDCP2.2 HDMI 2.0a)**

OPERATION MANUAL

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2020 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

The terms HDMI, HDMI High Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE	SUMMARY OF CHANGE
v1.00	15/04/2020	First release
V1.01	26/06/2020	Updated front cover image/Description

CONTENTS

1. Introduction	6
2. Applications	6
3. Package Contents	6
4. System Requirements	6
5. Features	7
6. Operation Controls and Functions	8
6.1 Front Panel	8
6.2 Rear Panel.....	9
6.3 Side Panel	9
6.4 RS-232 Pinout and Defaults	10
6.5 Serial Commands.....	11
7. Connection Diagram	14
8. Specifications.....	15
8.1 Technical Specifications	15
8.2 Video Specifications.....	16
8.3 Audio Specifications.....	18
8.4 Cable Specifications	18
9. Acronyms.....	19

1. INTRODUCTION

This UHD⁺ 3×1 HDMI Switcher Table Box features three HDMI inputs and one HDMI output with manual or automatic source switching. Every input and output supports full bandwidth 4K@60Hz (4:4:4, 8-bit) HDMI 2.0 with HDCP 2.2 signals. Automatic source management allows for hands-free switching based on input signal and hot plug detection with a “Last Memory” switching feature upon signal loss. This switch is an ideal addition to any conference room, lecture hall or home entertainment setup with its portable and easy to install design. The table box is designed to be placed on a table, or mounted to any typical table edge using a clamp. Control is via a front panel button and RS-232.

2. APPLICATIONS

- /// Conference rooms and boardrooms
- /// Lecture halls, auditoriums and classrooms
- /// Household entertainment sharing and control
- /// Hotel event spaces

3. PACKAGE CONTENTS

- /// 1× UHD⁺ 3×1 HDMI Switcher Table Box
- /// 1× 5V/1A DC Power Adapter (2-pin Terminal Block)
- /// 1× Operation Manual

4. SYSTEM REQUIREMENTS


- /// HDMI source equipment such as media players, video game consoles or set-top boxes.
- /// HDMI receiving equipment such as an HDTV, monitor or audio amplifier.
- /// The use of Premium High Speed HDMI cables is highly recommended.

5. FEATURES

- /// HDMI 2.0 and DVI 1.0 compatible
- /// HDCP 1.x and HDCP 2.2 compliant
- /// 3 HDMI inputs, 1 HDMI output
- /// Supports up to 4K UHD⁺ (18Gbps, 4K@50/60Hz 4:4:4, 8-bit) video input and output
- /// Supports Deep Colour input and output up to 12-bit
- /// Supports 10-bit and 12-bit HDR (High Dynamic Range) input/output
- /// Supports pass-through of many audio formats including 8 channel LPCM, Bitstream, and HD Bitstream
- /// Supports manual input selection or automatic input selection with hot plug detection and "Last Memory" feature
- /// Sophisticated EDID management ensures optimal compatibility
- /// LED indicators provide input selection as well as automatic switch status information
- /// Convenient table box design
- /// Control via front panel button and RS-232

6. OPERATION CONTROLS AND FUNCTIONS


6.1 Front Panel

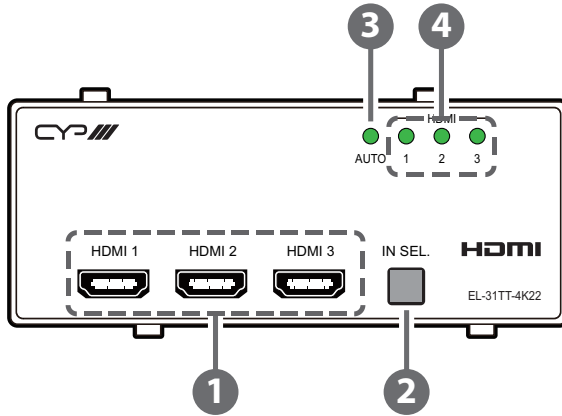

- 1 HDMI 1~3 Ports:** Connect to HDMI source equipment such as media players, game consoles or set-top boxes.
- 2 IN SEL. Button:** Press this button to sequentially switch through the available inputs or select auto switch. This button will also illuminate to indicate the unit is on and receiving power.


Note: The sequence is: HDMI 1 > HDMI 2 > HDMI 3 > Auto > HDMI 1
- 3 AUTO LED:** This LED will illuminate when the auto switch function is active. While active, the input source will be selected based on the most recently connected live source.
- 4 HDMI 1~3 LEDs:** The LED of the currently selected input will illuminate green. When an input has an active source, but is not currently selected, it will illuminate red. When no source is detected the LED will remain off.

6.2 Rear Panel

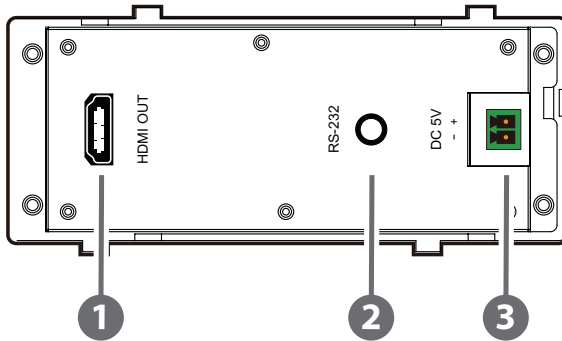

- 1 HDMI OUT Port:** Connect to an HDMI TV, monitor, or amplifier for digital video and audio output.
- 2 RS-232 Port:** Connect directly to a PC, laptop, or other serial control device with a 3.5mm mini-jack adapter cable to send RS-232 commands to control the unit.
- 3 DC 5V 2-pin Terminal Block:** Connect a 5V DC power adapter into this terminal block and connect it to an AC wall outlet for power.

6.3 Side Panel

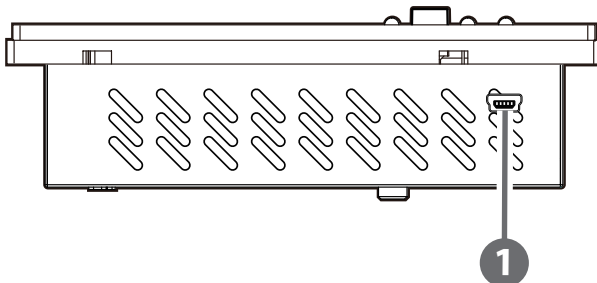


- 1 Micro USB Port:** This port is reserved for firmware update use only.

6.4 RS-232 Pinout and Defaults

Serial Port Default Settings	
Baud Rate	19200
Data Bits	8
Parity Bits	None
Stop Bits	1
Flow Control	None

3.5mm to DE-9
Adapter Cable



6.5 Serial Commands


COMMAND	
Description and Parameters	
?↵	Show the full command list.
help↵	Show the full command list.
set factory default↵	Reset the unit to the factory defaults.
get command ver↵	Show the unit's current command version.
get fw ver↵	Show the unit's current firmware version.
get model name↵	Show the unit's model name.
get model type↵	Show the unit's product type.
set out A route N1↵	Route the specified input to the HDMI output. N1 = 1~3 [HDMI input number]
get out A route↵	Show which input is currently routed to the HDMI output.
set out auto mode N1↵	Set the auto switching/scanning behavior of the unit. Available values for N1 : 0 [Off] 1 [Auto switch]
get out auto mode↵	Show the current auto switching/scanning mode of the unit.

COMMAND																					
Description and Parameters																					
get in type list ↵	List the port type of all inputs on the unit.																				
get out type list ↵	List the port type of all outputs on the unit.																				
get in port number ↵	Show the total number of inputs on the unit.																				
get out port number ↵	Show the total number of outputs on the unit.																				
set in N1 edid N2 ↵	<p>Set the EDID to use on the specified input.</p> <p>N1 = 1~3 [HDMI input number]</p> <p>Available values for N2:</p> <table border="0"> <tr> <td>1</td> <td>[Internal FHD, 2 channel audio]</td> </tr> <tr> <td>2</td> <td>[Internal FHD, multi-channel audio]</td> </tr> <tr> <td>3</td> <td>[Internal UHD, 2 channel audio]</td> </tr> <tr> <td>4</td> <td>[Internal UHD, multi-channel audio]</td> </tr> <tr> <td>5</td> <td>[Internal UHD+, 2 channel audio]</td> </tr> <tr> <td>6</td> <td>[Internal UHD+, multi-channel audio]</td> </tr> <tr> <td>7</td> <td>[User EDID 1]</td> </tr> <tr> <td>8</td> <td>[User EDID 2]</td> </tr> <tr> <td>9</td> <td>[User EDID 3]</td> </tr> <tr> <td>10</td> <td>[Copy output's EDID]</td> </tr> </table>	1	[Internal FHD, 2 channel audio]	2	[Internal FHD, multi-channel audio]	3	[Internal UHD, 2 channel audio]	4	[Internal UHD, multi-channel audio]	5	[Internal UHD+, 2 channel audio]	6	[Internal UHD+, multi-channel audio]	7	[User EDID 1]	8	[User EDID 2]	9	[User EDID 3]	10	[Copy output's EDID]
1	[Internal FHD, 2 channel audio]																				
2	[Internal FHD, multi-channel audio]																				
3	[Internal UHD, 2 channel audio]																				
4	[Internal UHD, multi-channel audio]																				
5	[Internal UHD+, 2 channel audio]																				
6	[Internal UHD+, multi-channel audio]																				
7	[User EDID 1]																				
8	[User EDID 2]																				
9	[User EDID 3]																				
10	[Copy output's EDID]																				
get in N1 edid ↵	<p>Show the EDID currently being used on the specified input.</p> <p>N1 = 1~3 [HDMI input number]</p>																				
get in edid list ↵	List all available EDID selections.																				

COMMAND	
Description and Parameters	
set user N1 edid data N2 ↵	
Upload a new EDID (in ASCII hex format) for use as the specified User EDID.	
N1 = 1~3	[User EDID number]
N2 = {Comma delimited hex pairs}	[EDID data]
get user N1 edid data ↵	
Show the current contents of the specified User EDID as HEX data.	
N1 = 1~3	[User EDID number]

Note: Commands will not be executed unless followed by a carriage return. Commands are not case-sensitive.

7. CONNECTION DIAGRAM

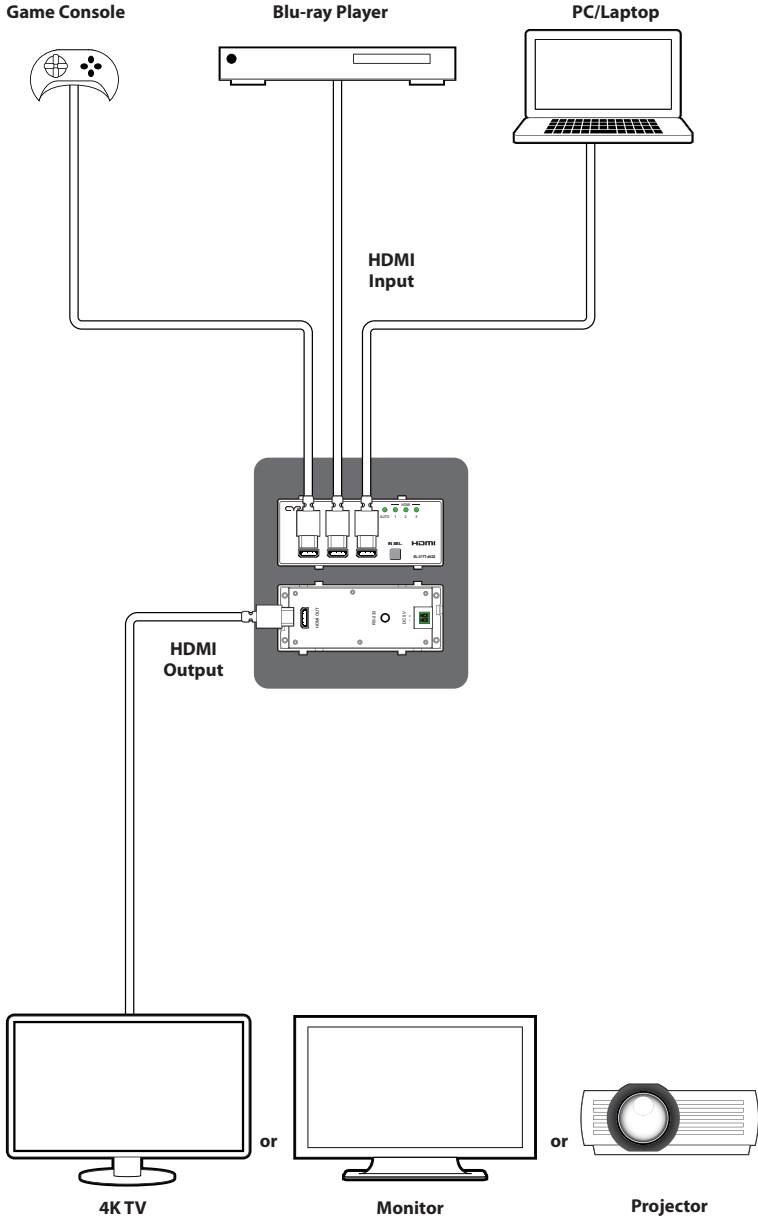

8. SPECIFICATIONS

8.1 Technical Specifications

HDMI Bandwidth	18Gbps
Input Ports	3×HDMI (Type-A)
Output Port	1×HDMI (Type-A)
Control Port	1×RS-232 (3.5mm)
Service Port	1×USB 2.0 (Mini B)
Baud Rate	19200
Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
ESD Protection (HBM)	±8kV (Air Discharge) ±4kV (Contact Discharge)
Dimensions (W×H×D)	125mm×55mm×34mm [Case Only] 125mm×55mm×40mm [All Inclusive]
Weight	230g
Chassis Material	Metal (Aluminum)
Chassis Colour	Black
Operating Temperature	0°C – 40°C/32°F – 104°F
Storage Temperature	-20°C – 60°C/-4°F – 140°F
Relative Humidity	20 – 90% RH (Non-condensing)
Power Consumption	2.53W

8.2 Video Specifications

Supported Resolutions (Hz)	Input	Output
	HDMI	HDMI
720x400p@70/85	✓	✓
640x480p@60/72/75/85	✓	✓
720x480i@60	✓	✓
720x480p@60	✓	✓
720x576i@50	✓	✓
720x576p@50	✓	✓
800x600p@56/60/72/75/85	✓	✓
848x480p@60	✓	✓
1024x768p@60/70/75/85	✓	✓
1152x864p@75	✓	✓
1280x720p@50/60	✓	✓
1280x768p@60/75/85	✓	✓
1280x800p@60/75/85	✓	✓
1280x960p@60/85	✓	✓
1280x1024p@60/75/85	✓	✓
1360x768p@60	✓	✓
1366x768p@60	✓	✓
1400x1050p@60	✓	✓
1440x900p@60/75	✓	✓
1600x900p@60RB	✓	✓
1600x1200p@60	✓	✓
1680x1050p@60	✓	✓
1920x1080i@50/60	✓	✓
1920x1080p@24/25/30	✓	✓

Supported Resolutions (Hz)	Input	Output
	HDMI	HDMI
1920×1080p@50/60	✓	✓
1920×1200p@60RB	✓	✓
2560×1440p@60RB	✓	✓
2560×1600p@60RB	✓	✓
2048×1080p@24/25/30	✓	✓
2048×1080p@50/60	✓	✓
3840×2160p@24/25/30	✓	✓
3840×2160p@50/60 (4:2:0)	✓	✓
3840×2160p@24, HDR10	✓	✓
3840×2160p@50/60 (4:2:0),HDR10	✓	✓
3840×2160p@50/60	✓	✓
4096×2160p@24/25/30	✓	✓
4096×2160p@50/60 (4:2:0)	✓	✓
4096×2160p@24, HDR10	✓	✓
4096×2160p@50/60 (4:2:0), HDR10	✓	✓
4096×2160p@50/60	✓	✓

8.3 Audio Specifications

8.3.1 Digital Audio

HDMI Input / Output	
LPCM	
Max Channels	8 Channels
Sampling Rate (kHz)	32, 44.1, 48, 88.2, 96, 176.4, 192
Bitstream	
Supported Formats	Standard & High-Definition

8.4 Cable Specifications

Cable Length	1080p		4K30	4K60
	8-bit	12-bit	(4:4:4) 8-bit	(4:4:4) 8-bit
High Speed HDMI Cable				
HDMI Input	15m	10m	5m	3m
HDMI Output	15m	10m	5m	3m

Bandwidth Category Examples:

1080p (FHD Video)

- Up to 1080p@60Hz, 12-bit Colour
- Data rates lower than 5.3Gbps or below 225MHz TMDS clock

4K30 (4K UHD Video)

- 4K@24/25/30Hz & 4K@50/60Hz (4:2:0), 8-bit Colour
- Data rates higher than 5.3Gbps or above 225MHz TMDS clock but below 10.2Gbps

4K60 (4K UHD⁺ Video)

- 4K@50/60Hz (4:4:4, 8-bit)
- 4K@50/60Hz (4:2:0, 10-bit HDR)
- Data rates higher than 10.2Gbps

9. ACRONYMS

ACRONYM	COMPLETE TERM
ASCII	American Standard Code for Information Interchange
AV	Audio/Video
CEC	Consumer Electronics Control
CLI	Command-Line Interface
DVI	Digital Visual Interface
EDID	Extended Display Identification Data
HDCP	High-bandwidth Digital Content Protection
HDMI	High-Definition Multimedia Interface
HDR	High Dynamic Range
HDTV	High-Definition Television
LED	Light-Emitting Diode
LPCM	Linear Pulse-Code Modulation
4K UHD	4K Ultra-High-Definition (10.2Gbps max)
4K UHD⁺	4K Ultra-High-Definition (18Gbps max)
UHDTV	Ultra-High-Definition Television
USB	Universal Serial Bus



CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue,
Shepperton, Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: sales@cypeurope.com

www.cypeurope.com

v1.01