

Kramer Electronics, Ltd.



USER MANUAL

Model:

VM-1110xl

Balanced Audio Distributor

Contents

1	Introduction	1
2	Getting Started	1
2.1	Quick Start	2
3	Overview	3
4	Your VM-1110xl Balanced Audio Distributor	3
5	Installing the VM-1110xl in a Rack	6
6	Connecting Your VM-1110xl	6
6.1	Connecting a 1:10 Mono DA	7
6.2	Connecting a 2x1:5 Mono DA	8
6.3	Connecting a 1:5 Stereo DA	9
7	Technical Specifications	10

Figures

Figure 1: VM-1110xl Balanced Audio Distributor	4
Figure 2: Connecting the VM-1110xl as a 1:10 Mono DA	7
Figure 3: Connecting the VM-1110xl as a 2x1:5 Mono DA	8
Figure 4: Connecting the VM-1110xl as a 1:5 Stereo DA	9

Tables

Table 1: VM-1110xl Balanced Audio Distributor Features	5
Table 2: VM-1110xl Balanced Audio Distributor Technical Specifications	10

1 Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront the video, audio, presentation, and broadcasting professional on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better! Our 1,000-plus different models now appear in 11 groups¹ that are clearly defined by function.

Thank you for purchasing your Kramer **VM-1110xl** *Balanced Audio Distributor*.

This product is ideal for the following typical applications:

- Audio duplication and production studios, delivering undiminished quality duplicates
- Recording studios
- Broadcast studios for on-line signal distribution

Each package includes the following items:

- **VM-1110xl** *Balanced Audio Distributor*
- Power cord²
- This user manual³

2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual
- Use Kramer high-performance high-resolution cables⁴

1 GROUP 1: Distribution Amplifiers; GROUP 2: Switchers and Matrix Switchers; GROUP 3: Control Systems; GROUP 4: Format/Standards Converters; GROUP 5: Range Extenders and Repeaters; GROUP 6: Specialty AV Products; GROUP 7: Scan Converters and Scalars; GROUP 8: Cables and Connectors; GROUP 9: Room Connectivity; GROUP 10: Accessories and Rack Adapters; GROUP 11: Sierra Products


2 We recommend that you use only the power cord supplied with this device

3 Download up-to-date Kramer user manuals from our Web site at <http://www.kramerelectronics.com>

4 The complete list of Kramer cables is on our Web site at <http://www.kramerelectronics.com>

2.1 Quick Start

This quick start chart summarizes the basic setup and operation steps.

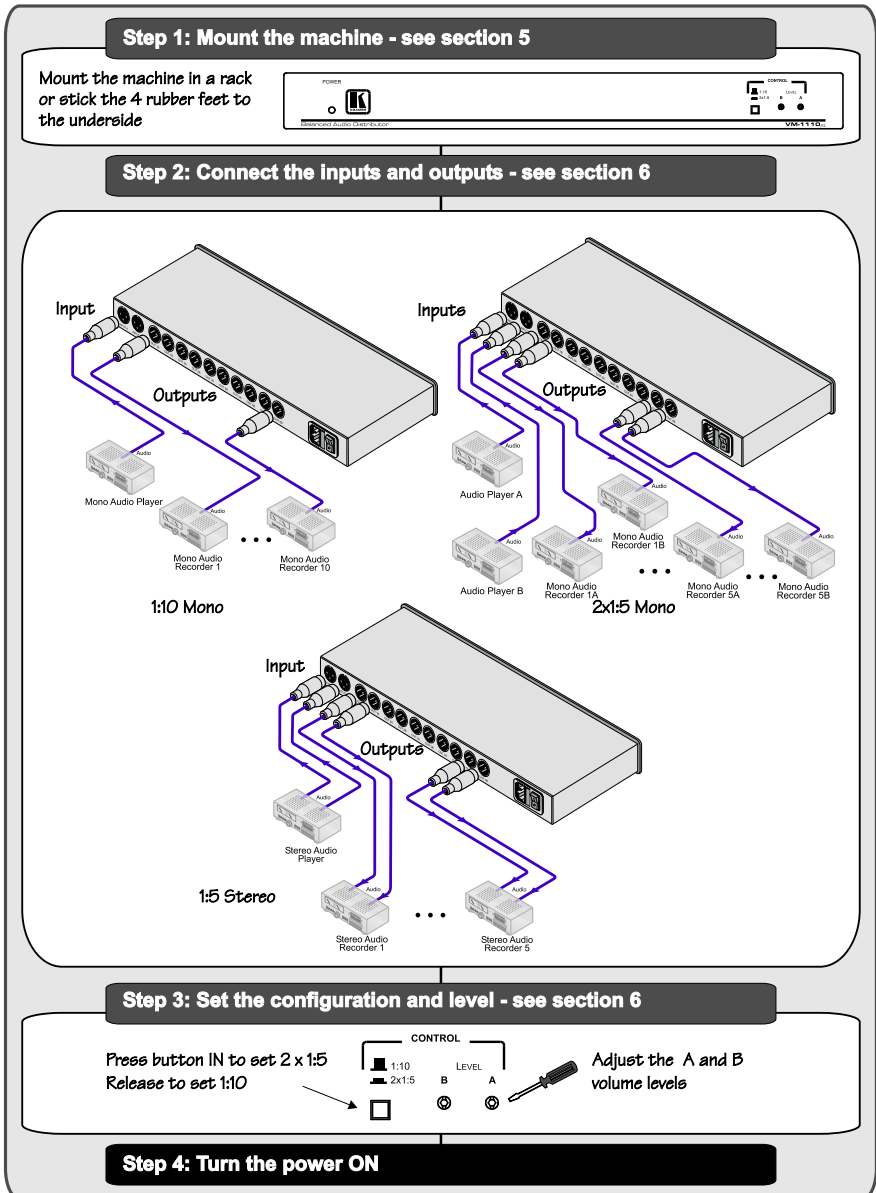

3 Overview

The **VM-1110xl** is a high performance balanced audio DA (distribution amplifier) using XLR connectors. It can be configured as a mono (1:10 or 2x1:5) DA or as a stereo (1:5) DA.

The **VM-1110xl** features:

- Front panel output level trimmer controls
- Active Bi-FET amplifying circuitry that ensures hum-free, full-bandwidth operation
- A high-power discrete buffering system providing excellent performance

To achieve the best performance:

- Use only good quality connection cables¹ to avoid interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables).
- Avoid interference from neighboring electrical appliances that may adversely influence signal quality and position your Kramer **VM-1110xl** away from moisture, excessive sunlight and dust

4 Your VM-1110xl Balanced Audio Distributor

Figure 1 and *Table 1* define the **VM-1110xl**.

¹ Available from Kramer Electronics on our Web site at <http://www.kramerelectronics.com>

Your VM-1110xl Balanced Audio Distributor

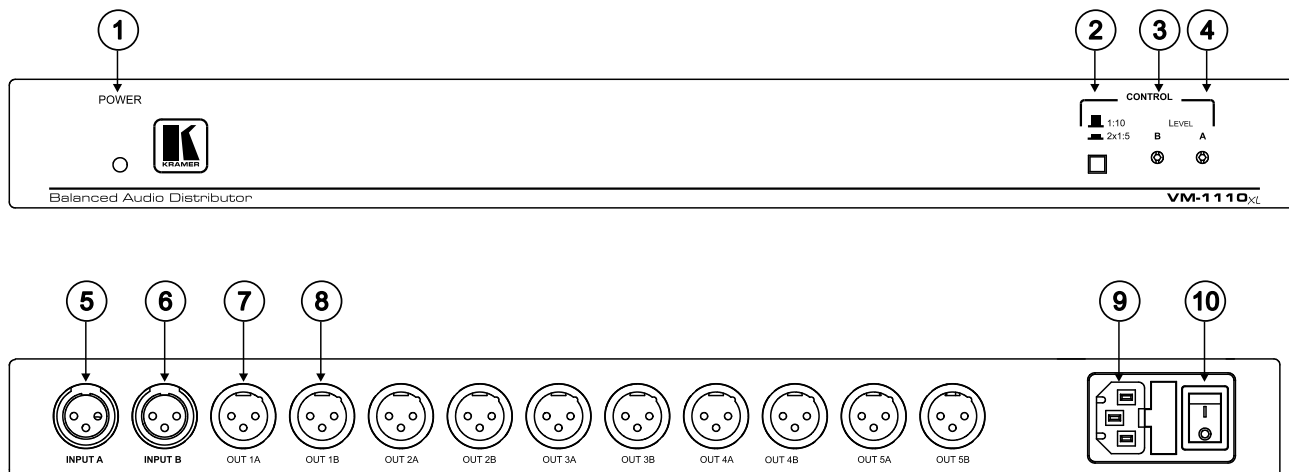


Figure 1: VM-1110xl Balanced Audio Distributor

Table 1: VM-1110xl Balanced Audio Distributor Features

#	Feature	Function
1	Power LED	Lights when the unit is powered on
2	1:10 / 2x1:5 Button	Pushing in selects 2x1:5 ¹ , releasing selects 1:10 ²
3	Level B Trimmer	Adjusts ³ the output signal level for OUTPUT B
4	Level A Trimmer	Adjusts ³ the output signal level for OUTPUT A
5	INPUT A XLR Female Connector	Connects to the source A
6	INPUT B XLR Female Connector	Connects to the source B
7	OUT A XLR Male Connector	Connects to the acceptor A (from 1 to 5)
8	OUT B XLR Male Connector	Connects to the acceptor B (from 1 to 5)
9	Power Connector with Fuse	AC connector enabling power supply to the unit
10	ON/OFF Switch	Illuminated switch for powering the unit

1 Splits inputs A and B to outputs 1A-5A and 1B-5B, respectively

2 Splits input A to all 10 outputs

3 Insert a screwdriver into the small hole and carefully rotate it, trimming the OUTPUT level

5 Installing the VM-1110xl in a Rack

This section describes how to install the **VM-1110xl** in a rack.

Before Installing in a rack

Before installing in a rack, be sure that the environment is within the recommended range:	
Operating temperature range	+5° to +45° C (41° to 113° F)
Operating humidity range	10 to 90% RHL, non-condensing
Storage temperature range	-20° to +70° C (-4° to 158° F)
Storage humidity range	5 to 95% RHL, non-condensing



CAUTION!!


When installing on a 19" rack, avoid hazards by taking care that:

1. It is located within the recommended environmental conditions, as the operating ambient temperature of a closed or multi unit rack assembly may exceed the room ambient temperature.
2. Once rack mounted, enough air will still flow around the machine.
3. The machine is placed straight in the correct horizontal position.
4. You do not overload the circuit(s). When connecting the machine to the supply circuit, overloading the circuits might have a detrimental effect on overcurrent protection and supply wiring. Refer to the appropriate nameplate ratings for information. For example, for fuse replacement, see the value printed on the product label.
5. The machine is earthed (grounded) in a reliable way and is connected only to an electricity socket with grounding. Pay particular attention to situations where electricity is supplied indirectly (when the power cord is not plugged directly into the socket in the wall), for example, when using an extension cable or a power strip, and that you use only the power cord that is supplied with the machine.

How to Rack Mount

To rack-mount a machine:

1. Attach both ear brackets to the machine. To do so, remove the screws from each side of the machine (3 on each side), and replace those screws through the ear brackets.



2. Place the ears of the machine against the rack rails, and insert the proper screws (not provided) through each of the four holes in the rack ears.

Note that:

- **In some models, the front panel may feature built-in rack ears**
- Detachable rack ears can be removed for desktop use
- Always mount the machine in the rack before you attach any cables or connect the machine to the power
- If you are using a Kramer rack adapter kit (for a machine that is not 19"), see the Rack Adapters user manual for installation instructions (you can download it at: <http://www.kramerelectronics.com>)

6 Connecting Your VM-1110xl

You can connect your **VM-1110xl** *Balanced Audio Distributor* in one of three ways:

- 1:10 mono DA, see section 6.1
- 2x1:5 mono DA, see section 6.2
- 1:5 stereo DA, see section 6.3

6.1 Connecting a 1:10 Mono DA

To connect¹ the **VM-1110xl** as a 1:10 mono DA, as the example in *Figure 2* illustrates, do the following:

1. Connect one mono audio source (for example, a mono audio player) to INPUT A on the rear panel.
2. Connect up to 10 audio acceptors² to the OUT connectors on the rear panel.
3. On the front panel, release the 1:10 / 2x1:5 button.
4. Connect the power cord to the electricity supply.
5. Switch on the **VM-1110xl**.
The audio input is distributed to the audio outputs.

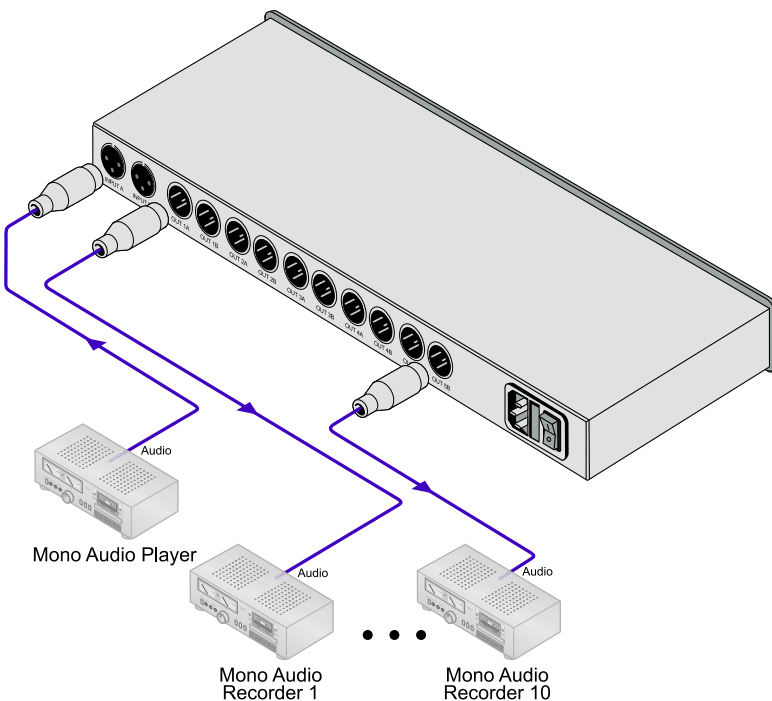


Figure 2: Connecting the VM-1110xl as a 1:10 Mono DA

¹ Switch OFF the power on each device before connecting it to your VM-1110xl. After connecting your VM-1110xl, switch on its power and then switch on the power on each device

² Not all outputs have to be connected

6.2 Connecting a 2x1:5 Mono DA

To connect¹ the **VM-1110xl** as a 2x1:5 mono DA, as the example in *Figure 3* illustrates, do the following:

1. Connect mono audio source A (for example, a mono audio player) to INPUT A on the rear panel.
2. Connect mono audio source B (for example, a mono audio player) to INPUT B on the rear panel.
3. Connect up to 10 audio acceptors² to the OUT connectors on the rear panel. The A INPUT feeds to the A OUT connectors and the B INPUT feeds to the B OUT connectors.
4. On the front panel, press IN the 1:10 / 2x1:5 button.
5. Connect the power cord to the electricity supply.
6. Switch on the **VM-1110xl**.
The audio input is distributed to the audio outputs.

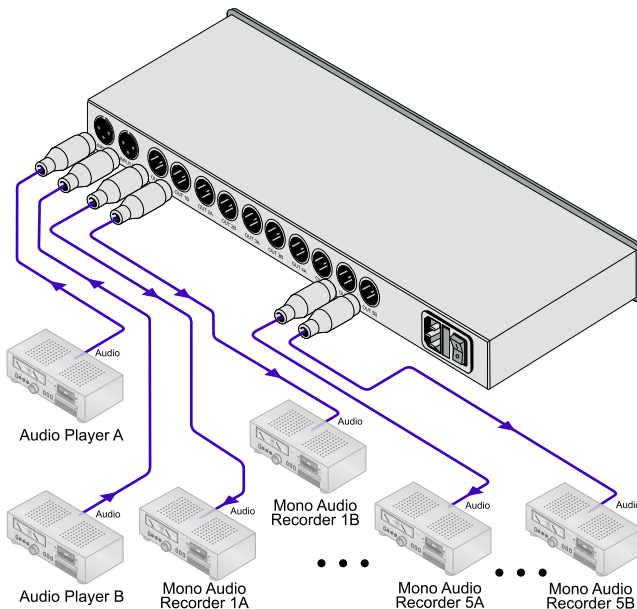


Figure 3: Connecting the VM-1110xl as a 2x1:5 Mono DA

1 Switch OFF the power on each device before connecting it to your VM-1110xl. After connecting your VM-1110xl, switch on its power and then switch on the power on each device

2 Not all outputs have to be connected

6.3 Connecting a 1:5 Stereo DA

To connect¹ the **VM-1110xl** as a 1:5 stereo DA, as the example in *Figure 4* illustrates, do the following:

1. Connect one stereo audio source (for example, a stereo audio player) to INPUT A (left channel) and INPUT B (right channel) on the rear panel.
2. Connect up to 5 audio acceptors² to the OUT connectors (left channels to OUT A and right channels to OUT B) on the rear panel.
3. On the front panel, press IN the 1:10 / 2x1:5 button.
4. Connect the power cord to the electricity supply.
5. Switch on the **VM-1110xl**.
The audio input is distributed to the audio outputs.

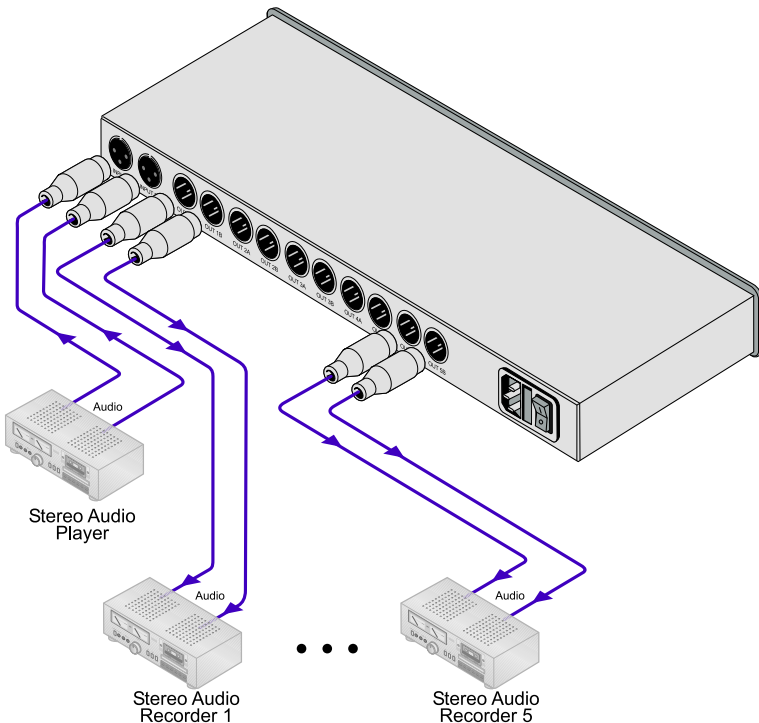


Figure 4: Connecting the VM-1110xl as a 1:5 Stereo DA

¹ Switch OFF the power on each device before connecting it to your VM-1110xl. After connecting your VM-1110xl, switch on its power and then switch on the power on each device. Not all outputs need to be connected

7 Technical Specifications

The **VM-1110xl** technical specifications are shown in *Table 2*:

Table 2: VM-1110xl Balanced Audio Distributor Technical Specifications¹

INPUTS:	2 balanced audio +4dBu/50kΩ on XLR (F) connectors
OUTPUTS:	10 balanced audio +4dBu/50Ω on XLR (M) connectors
MAX. OUTPUT LEVEL:	23.8Vpp
BANDWIDTH (-3dB):	>100kHz
S/N RATIO:	89.3dB
CROSSTALK:	-78dB
CONTROLS:	Level (x2): -0.7dB to +5.1dB, mode selector switches
COUPLING:	AC (input); DC (output)
AUDIO THD + NOISE:	0.081%
AUDIO 2nd HARMONIC:	0.006%
POWER SOURCE:	230V AC, (115V AC U.S.A) 6VA
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable
WEIGHT:	2.6kg (5.7lbs) approx
ACCESSORIES:	Power cord

¹ Specifications are subject to change without notice

LIMITED WARRANTY

Kramer Electronics (hereafter *Kramer*) warrants this product free from defects in material and workmanship under the following terms.

HOW LONG IS THE WARRANTY

Labor and parts are warranted for seven years from the date of the first customer purchase.

WHO IS PROTECTED?

Only the first purchase customer may enforce this warranty.

WHAT IS COVERED AND WHAT IS NOT COVERED

Except as below, this warranty covers all defects in material or workmanship in this product. The following are not covered by the warranty:

1. Any product which is not distributed by Kramer, or which is not purchased from an authorized Kramer dealer. If you are uncertain as to whether a dealer is authorized, please contact Kramer at one of the agents listed in the Web site www.kramerelectronics.com.
2. Any product, on which the serial number has been defaced, modified or removed, or on which the WARRANTY VOID IF TAMPERED sticker has been torn, reattached, removed or otherwise interfered with.
3. Damage, deterioration or malfunction resulting from:
 - i) Accident, misuse, abuse, neglect, fire, water, lightning or other acts of nature
 - ii) Product modification, or failure to follow instructions supplied with the product
 - iii) Repair or attempted repair by anyone not authorized by Kramer
 - iv) Any shipment of the product (claims must be presented to the carrier)
 - v) Removal or installation of the product
 - vi) Any other cause, which does not relate to a product defect
 - vii) Cartons, equipment enclosures, cables or accessories used in conjunction with the product

WHAT WE WILL PAY FOR AND WHAT WE WILL NOT PAY FOR

We will pay labor and material expenses for covered items. We will not pay for the following:

1. Removal or installation charges.
2. Costs of initial technical adjustments (set-up), including adjustment of user controls or programming. These costs are the responsibility of the Kramer dealer from whom the product was purchased.
3. Shipping charges.

HOW YOU CAN GET WARRANTY SERVICE

1. To obtain service on you product, you must take or ship it prepaid to any authorized Kramer service center.
2. Whenever warranty service is required, the original dated invoice (or a copy) must be presented as proof of warranty coverage, and should be included in any shipment of the product. Please also include in any mailing a contact name, company, address, and a description of the problem(s).
3. For the name of the nearest Kramer authorized service center, consult your authorized dealer.

LIMITATION OF IMPLIED WARRANTIES

All implied warranties, including warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this warranty.

EXCLUSION OF DAMAGES

The liability of Kramer for any effective products is limited to the repair or replacement of the product at our option. Kramer shall not be liable for:

1. Damage to other property caused by defects in this product, damages based upon inconvenience, loss of use of the product, loss of time, commercial loss; or:
2. Any other damages, whether incidental, consequential or otherwise. Some countries may not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights, which vary from place to place.

NOTE: All products returned to Kramer for service must have prior approval. This may be obtained from your dealer.

This equipment has been tested to determine compliance with the requirements of:

- EN-50081: "Electromagnetic compatibility (EMC);
generic emission standard.
Part 1: Residential, commercial and light industry"
- EN-50082: "Electromagnetic compatibility (EMC) generic immunity standard.
Part 1: Residential, commercial and light industry environment".
- CFR-47: FCC* Rules and Regulations:
Part 15: "Radio frequency devices
Subpart B Unintentional radiators"

CAUTION!

⊗ Servicing the machines can only be done by an authorized Kramer technician. Any user who makes changes or modifications to the unit without the expressed approval of the manufacturer will void user authority to operate the equipment.

⊗ Use the supplied DC power supply to feed power to the machine.

⊗ Please use recommended interconnection cables to connect the machine to other components.

* FCC and CE approved using STP cable (for twisted pair products)



**For the latest information on our products and a list of Kramer distributors, visit our Web site: www.kramerelectronics.com where updates to this user manual may be found.
We welcome your questions, comments and feedback.**



Caution

Safety Warning:

Disconnect the unit from the power supply before opening/servicing.



PN: 2900-001030



Rev: 2

Kramer Electronics, Ltd.

Web site: www.kramerelectronics.com

E-mail: info@kramerel.com

P/N: 2900-001030 REV 2