

4x2 Matrix Switcher with TPS and HDMI Inputs and Analog Audio Ports



Part No: 9131 0035




Highlight Features

- 4x2 HDMI matrix switcher with HDMI and TPS ports
- Up to 170m cable compensation over TPS*
- 4K/UHD (30Hz RGB 4:4:4, 60Hz YCbCr 4:2:0) and 3D capabilities
- Fully HDCP compliant
- Balanced analog audio input and output ports for audio embedding and de-embedding
- Audio volume control on analog input and output
- Advanced EDID management
- Event Manager
- RS-232, IR, Ethernet extension over TPS
- RS-232, Ethernet, USB control options
- Compact size


* Depends on cable category and quality

MMX4x2-HT is a uniquely mini size matrix switcher. It has three HDMI inputs and one HDBaseT™ compatible TPS input port. It has two independent HDMI outputs. Audio can be de-embedded from the HDMI signal to a balanced 5-pole Phoenix (Euroblock) port and external audio signal can be embedded into the HDMI stream from another 5-pole Phoenix input port. The volume and gain properties of the audio signal can be modified at both input and output. The unit is fully 4K/UHD/3D capable and HDCP compliant. The device has a built-in Event Manager configurable via the Lightware Device Controller software. Further control options are served by the USB, RS-232, IR (in and out) and Ethernet ports.

Standalone Application Diagram

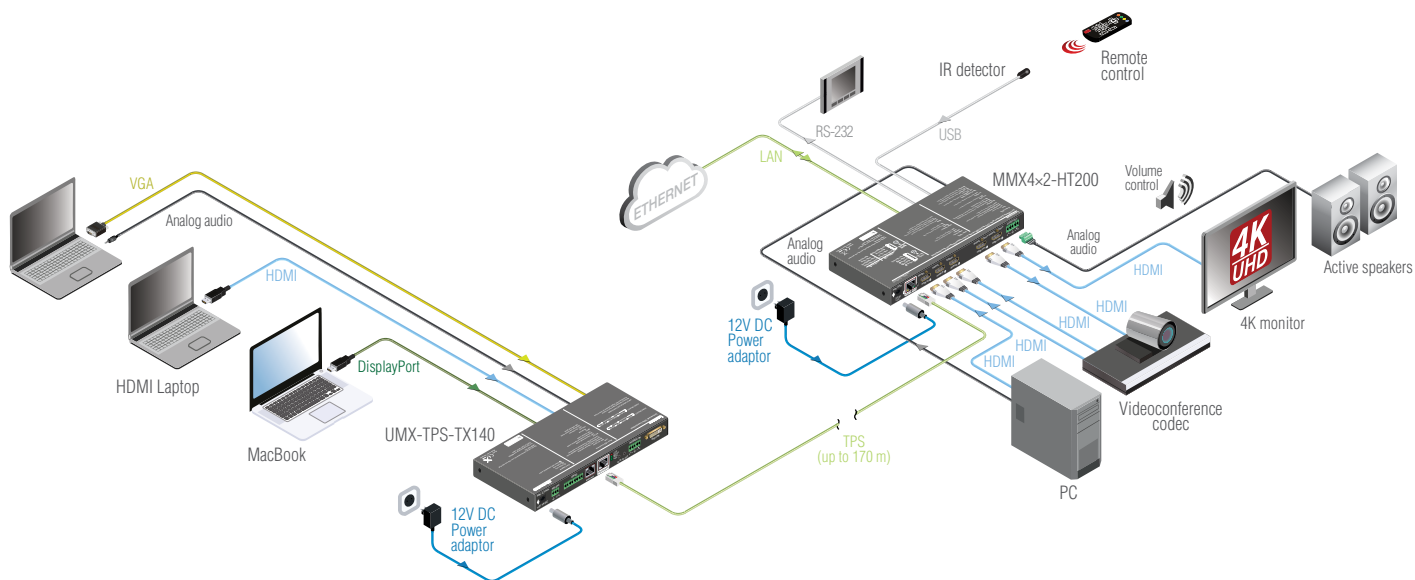

Port Diagram

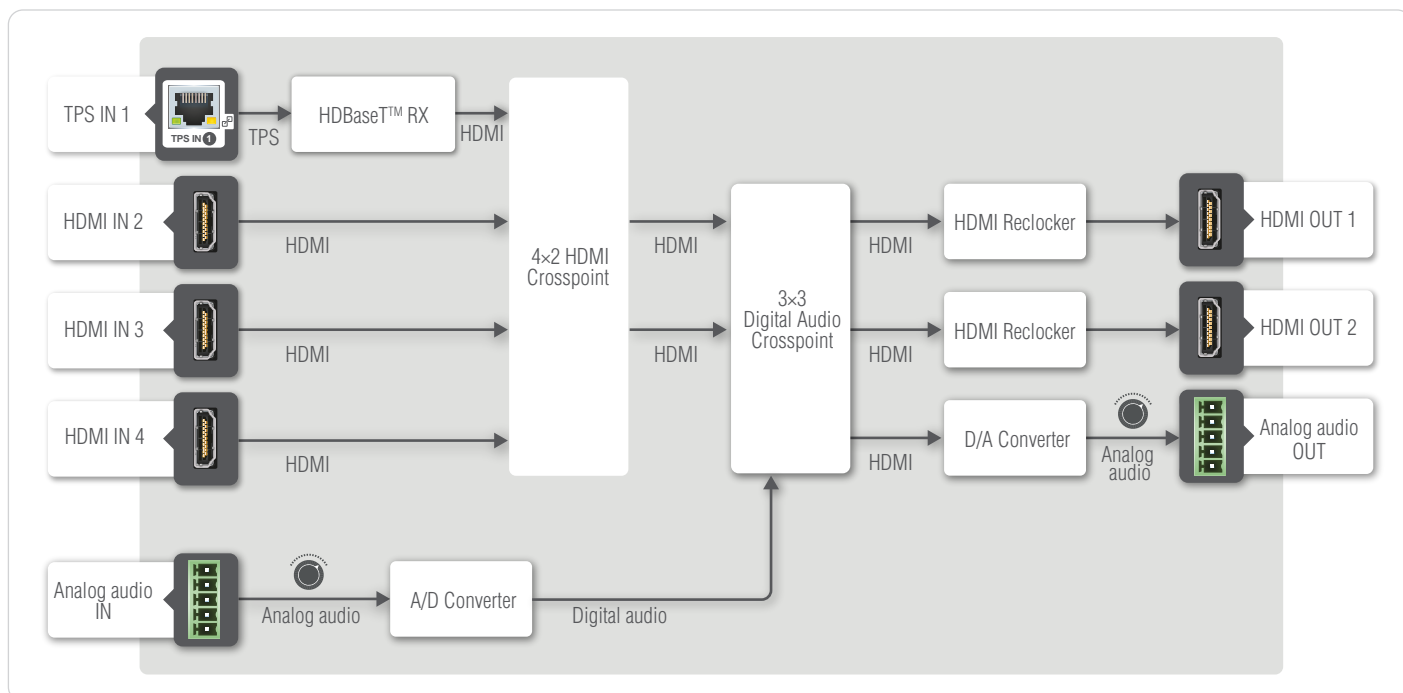

MMX4x2-HT200

Event Manager

The Event Manager is a smart, built-in feature in the Lightware HDBaseT compatible TPS extender family, the MODEX line and in some select matrix switchers like the MMX4x2 series units. The feature is available through the freely downloadable Lightware Device Controller software.

The Event Manager was developed to handle tasks from the most simple to expert ones, like controlling the rolling shutter, the air conditioning system or the lights based on any condition changes on the media ports, such as a new source being connected or removed.

Event Manager application is continuously updated with additional features via firmware upgrades: a delay can be added between the condition and the action and more actions can be triggered by a single condition change. With the help of the 'condition count' and 'action test' features, the predefined settings can be tested before going live. The system can recognize infrared commands which can also be set as conditions, and commands can also be sent via Ethernet.

Event Manager Wizard

Assigning an action to a condition is quick and easy with the Wizard function of Event Manager.


The most typical examples of the currently selectable conditions and actions within the Event Manager Wizard are the following:

Conditions


Video	Signal is detected on a port
Video	Signal is not detected on a port
Audio	Signal is detected on a port
Audio	Signal is not detected on a port
Audio	Signal type changes to 2 CH PCM
Audio	Signal type changes to Multichannel PCM or Compressed
Audio	Signal type changes to Undefined (no signal)
IR	Infra code recognized
General	TPS link state changes to Connected
General	TPS link state changes to Disconnected

Actions


Ethernet	Send TCP command
Ethernet	Send UDP command
R232	Send RS232 message
EDID	Switch EDID
Audio	Set audio volume
Audio	Mute output
Audio	Unmute output
Audio	Increase/decrease volume
Video	Switch input to output
Video	Enable autoselect on output
Video	Disable autoselect on output
Video	Load crosspoint preset
Audio	Source select

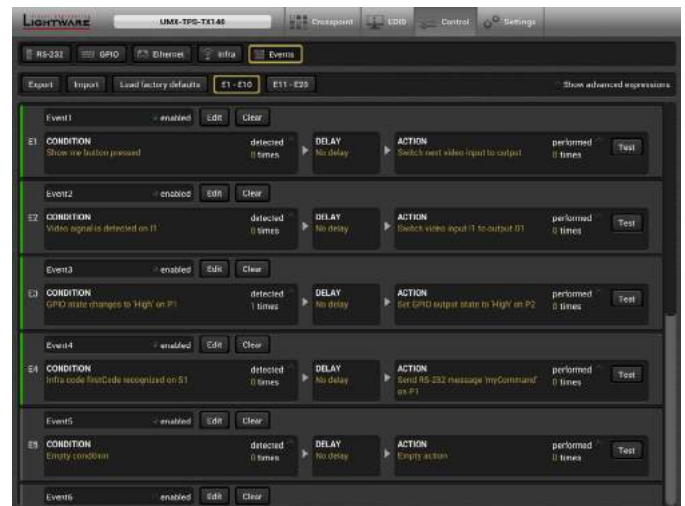


The Events menu contains separately configurable Events

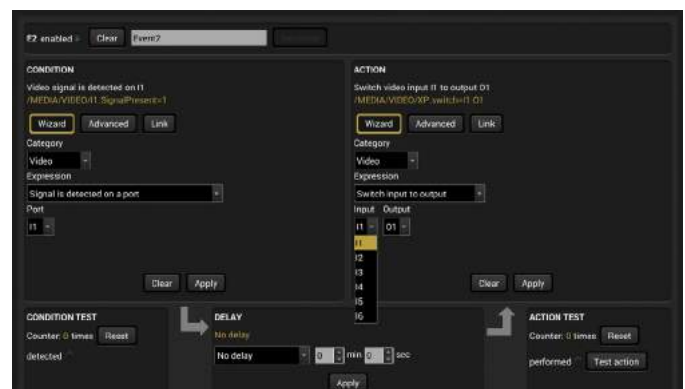

The Event Wizard makes the setup easy with simple dropdown options


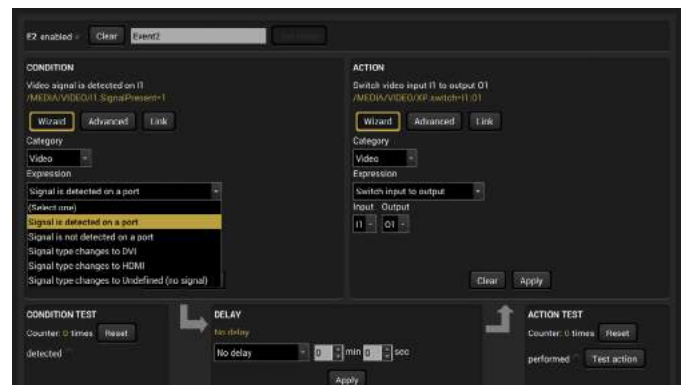


There are many default Expressions available to choose from

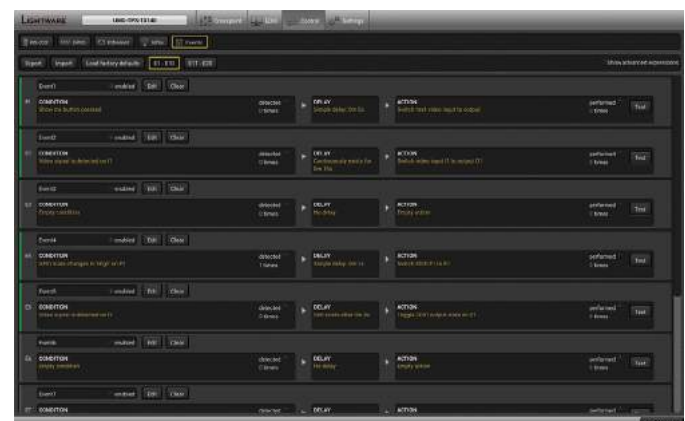



Green lines show which Event is configured and active, the rest stays grey

Event Example A

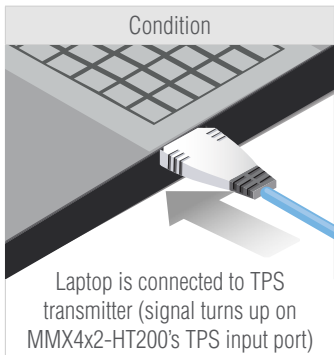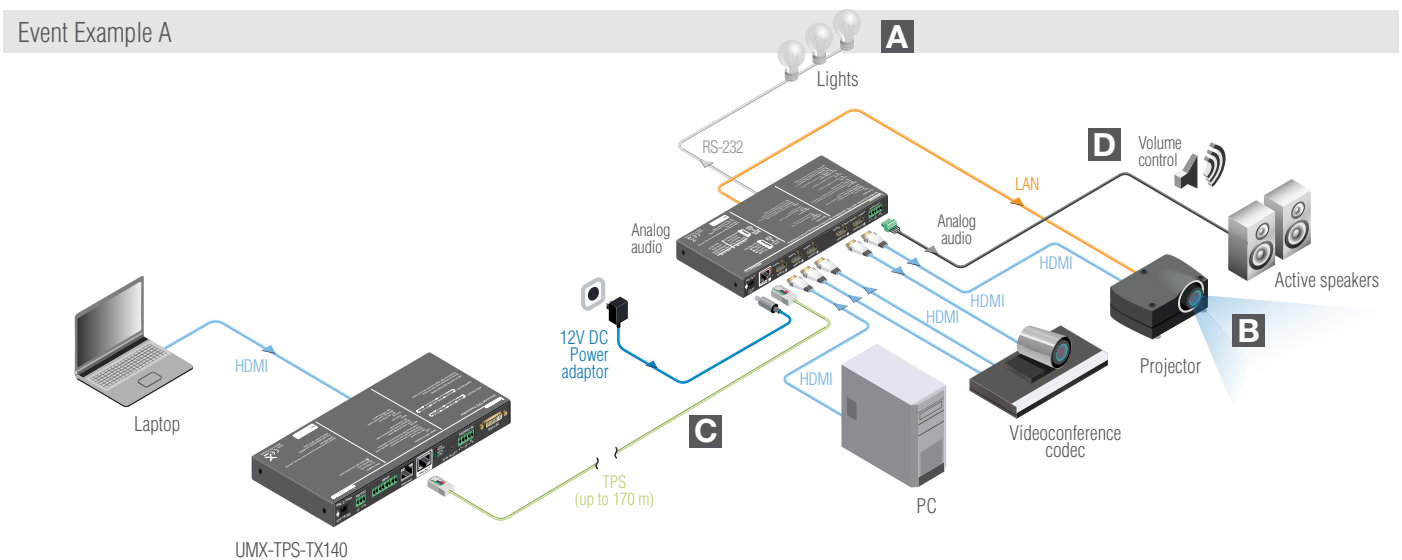

	Action
	A Switches the lights off over RS232
	B Switches the projector on over TCP/IP
	C Switches TPS input to HDMI OUT 2 (projector)
	D Unmutes analog audio out and adjusts volume

Event Example B

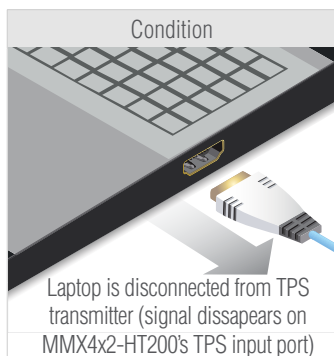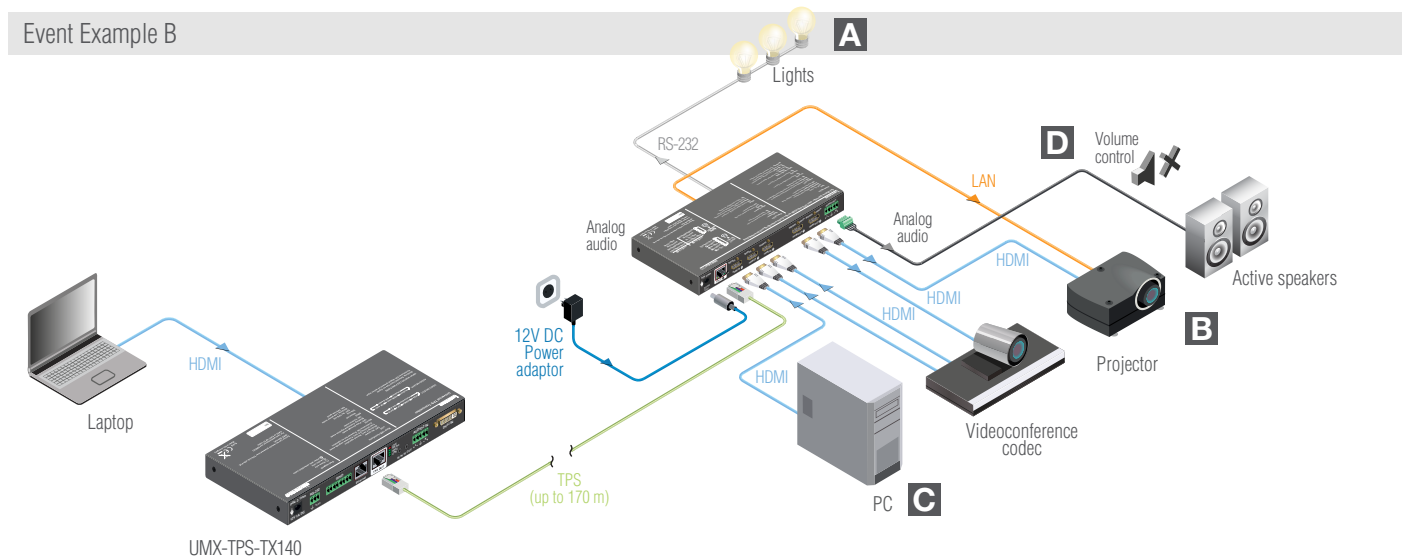

	Action
	A Switches the lights on over RS232
	B Switches the projector off over TCP/IP
	C Switches HDMI input 2 (PC) to HDMI OUT 2 (projector)
	D Mutes analog audio out

Applications

- Classrooms
- Meeting and conference rooms
- Control room
- Home cinema

Features

- 4x2 Matrix Switcher with HDMI 1.4 and TPS ports
- 4K/UHD (30Hz RGB 4:4:4, 60Hz YCbCr 4:2:0) and 3D capabilities
- Video inputs: 1x HDBase™ Compatible TPS input, 3x HDMI 1.4 inputs
- Video outputs: 2x HDMI 1.4 outputs
- Audio ports: 1x 5-pole Phoenix connector for balanced analog audio embedding, 1x 5-pole Phoenix connector for balanced analog audio de-embedding
- Analog audio volume control
- Embedded 7.1 HBR audio support
- Event Manager
- Intuitive Control Software
- Bi-directional RS-232, IR and Ethernet extension over TPS
- Command injection on IR and RS-232 connections
- Fully HDCP compliant
- Advanced EDID Management
- HDBase™ compatibility
- Zero frame delay
- Frame detector
- Compact size

* Depends on cable category and quality

Compatible Products

- TPS Transmitters:
 - HDMI-TPS-TX95/97
 - DVI-HDCP-TPS-TX95/97
 - UMX-TPS-TX100 series
 - WP-UMX-TPS-TX100 series
 - SW4-TPS-TX240
 - HDMI-TPS-TX200 series
 - DP-TPS-TX200 series
- MX Modular matrix frames - MX-TPS/TPS2-OB
- 25G Modular matrix frames - 25G-TPS2-OB
- Standalone TPS matrix frames – MMX6x2-HT series

Analog Audio Input

Volume:	-96 .. 0 dB
Balance:	-100 .. 0 .. 100
Mute function:	Yes

Analog Audio Output

Volume:	-57 .. +3 dB
Balance:	-100 .. 0 .. 100
Mute function:	Yes

Specification

Resolution:	Up to 4K UHD 3840×2160@30Hz, 1600x-1200@60Hz, FullHD 1920x1080@60Hz
Digital audio formats:	Supports up to 8 channel PCM, Dolby TrueHD and DTS-HD Master Audio 7.1 formats
Input cable equalization (TPS):	Automatic max 170 m*
EDID emulation:	Yes, Advanced EDID Management
EDID memory:	120 factory preset, 12 user programmable
HDCP compatibility:	Yes
RS-232 pass-through	Yes, configurable
RS-232 (control option):	9600, 19200, 38400, 57600, 115200 Baud Rx,Tx (default: 57600)
Local power:	DC Power supply 12V, 2A
Power consumption:	10W (max)
Enclosure:	1 mm metal
Dimensions:	221 W x 100.4 D x 26 H mm
Compliance:	CE
Warranty:	3 years

*Depends on cable category and quality

Connectors

Digital video inputs:	4x HDMI connector
Digital video outputs:	2x HDMI connector
Balanced audio input:	5-pole Phoenix (Euroblock) connector
Balanced audio output:	5-pole Phoenix (Euroblock) connector
Ethernet:	1 x RJ45
IR in and out:	3.5 mm jack
Serial port:	3-pole Phoenix (Euroblock)
Power:	Locking DC connector (2.1 / 5.5 mm)

Supplied Accessories



PSU-12VU Universal DC adaptor (Part No: 1180 0051)

Wall power adaptor with interchangeable plug for international use.
Universal input: 100-240 V AC, 50-60 Hz, output: 12 V DC, 2.5 A



IR emitter and IR eye

(Part No: 1374 0003 TX, 1374 0002 RX)

IR emitter is supplied with TPS-TX, IR eye is supplied with TPS-RX units. Needed for IR extension.

Optional Accessories



Rack shelf (Part No: 5240 0269)

The 1U high rack shelf provides mounting holes for fastening two half- rack or four quarter-rack sized units.



Under desk mounting kit double (Part No: 5240 0276)

The UD-kit double makes it easy to mount multiple devices on any flat surface (e.g. furniture).

Max Cable Lengths Supported by the Available Firmware Versions

Resolution	Pixel Clock Rate	Cable Lengths (Auto / Longreach TPS Mode)		
		CAT5e AWG24	CAT7 AWG26	CAT7 AWG23
1024x768@60Hz	65 MHz	100 m / 130 m*	90 m / 120 m*	120 m / 170 m*
1280x720p@60Hz	73.8 MHz	100 m / 130 m*	90 m / 120 m*	120 m / 170 m*
1920x1080p@60Hz / 24bpp	148.5 MHz	100 m / 130 m*	90 m / 120 m*	120 m / 170 m*
1920x1200@60Hz	152.9 MHz	100 m / NA*	90 m / NA*	120 m / NA*
1600x1200@60Hz	162 MHz	100 m / NA*	90 m / NA*	120 m / NA*
1920x1080@60Hz / 36bpp	223 MHz	70 m / NA*	70 m / NA*	100 m / NA*
3840x2160@30Hz UHD	297 MHz	70 m / NA*	70 m / NA*	100 m / NA*
4096x2160@30Hz 4K	297 MHz	70 m / NA*	70 m / NA*	100 m / NA*

Above values are valid when the extender is powered by a local adaptor, distances may decrease depending on the powering mode (local or remote) and cable quality.

* with Long reach operation mode which supports pixel clock frequencies up to 148,5 MHz.