

you can
Canon

MULTIMEDIA PROJECTOR

LV-7260

Make every
presentation count.



The LV-7260 offers bright, high contrast projection for professional presentations. The wide-angle zoom lens enables flexible placement, even in the smallest meeting rooms. A cost-effective device, it's also ideal for presenters on the move.

- High resolution, native XGA projection for crisp image detail
- 2000 lumens for bright, clear images even in daylight
- High 600:1 contrast ratio for brighter whites, darker blacks and vivid colours
- Near-silent operation, just 29dBA in Quiet Mode
- Canon wide angle 1.6x zoom lens for large image projection in small rooms
- Vertical Keystone Correction ensures image edges remain parallel
- Screen Colour Correction for natural colours when projecting onto chalkboards or coloured surfaces
- Fast 8 second start up and just 30 second cool down
- Ergonomic design - compact, lightweight and portable at just 3.0kg



Specifications LV-7260

LCD PANEL Type Size and Number Aspect Ratio Native Resolution	Transmissive LCD, Poly-silicon TFT Active Matrix 0.6" diagonal with microlens, 3 panels 4:3 1024 x 768 (XGA), 786432 pixels
OPTICS Light Source Lens F Number & Focal Length Zoom Magnification & Control Focus Control Lens Shift	190W NSH lamp F1.6 - F2.5; f=17.7 - 28.3mm 1.6x Manual Manual 8.6 : 1.4 (fixed)
IMAGE AND AUDIO Brightness Brightness Uniformity Contrast Ratio Projection Distance Coverage Screen Size Digital Zoom Magnification Keystone Correction Range Digital RGB Compatibility Analogue RGB Compatibility Digital Video Scan Systems Component Video Scan Systems Video / S-Video Colour Systems Analogue Scanning Frequency Display Modes Image Enhancement Built-in Speaker	2000 lumens (1600 lumens in Quiet Mode) 85% 600:1 (full on / full off) 1.1m - 8.8m (2.9m - 4.6m for a 100 inch image) 25" - 300" (51 x 38cm - 610 x 457cm) 1x - 4x (16x Area Ratio) Vertical: +/- 30° (Manual) - UXGA / SXGA / XGA / SVGA / VGA / MAC - 1080i / 720p / 575p / 575i / 480p / 480i PAL / PAL-M / PAL-N / PAL-60 / NTSC / NTSC4.43 / SECAM Horizontal: 15-100kHz, Vertical: 50-120Hz, Clock: 108MHz Standard, Presentation, Movie, Video, sRGB, Custom Digital Gamma Correction 1.0W RMS, Monaural


CONNECTORS Analogue RGB Input Analogue RGB Output S-Video Input Composite Video Input Audio Input Service Port / Projector Control	Mini D-Sub 15-pin (Component Video via optional cable) Mini D-Sub 15-pin Mini DIN 4-pin RCA x 1 RCA x 2 (L/R) Mini-DIN 8-pin
MECHANISMS Front Elevation Mechanism	Mechanical foot, 10° maximum image elevation
RATINGS Dimensions (W x H x D) Weight Power Source Power Consumption Noise Level Operating Environment Storage Environment Warranty	310mm x 109mm x 265mm 3.0kg 100V - 240V AC, 50/60Hz Normal Mode: 255W Quiet Mode: 205W Standby: 9W Normal Mode: 35dBA Quiet Mode: 29dBA +5°C to +40°C -10°C to +50°C 3 years (90 days for lamp)
Some images are simulated for clarity of reproduction. All data is based on Canon's standard testing methods. This leaflet and the specifications of the product have been developed prior to the date of product launch. Final specifications are subject to change without notice. ™ and ®: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries	

Accessories

In-box	Optional				
<ul style="list-style-type: none"> - Soft Carrying Case - Remote Control Unit - AAA Alkaline Batteries x 2 - Lens Cap - AC Mains Power Cable - VGA Computer Connection Cable - USB Infrared Mouse Receiver 					
	Replacement Lamp LV-LP26	Canon Ceiling Mounting Bracket LV-CL11	Component Video Adapter Cable LV-CA32	RS-232C Control Cable LV-CA34	VGA Extension Cable, 10 metres LV-CA02

TRUE THROW DISTANCES							
Screen Size	25	40	80	100	150	200	300
inches	25	40	80	100	150	200	300
cm	51 x 38	81 x 61	163 x 122	203 x 152	305 x 229	406 x 305	610 x 457
Projection Distance							
Zoom max	-	1.2m	2.3m	2.9m	4.4m	5.9m	8.8m
Zoom min	1.1m	1.8m	3.6m	4.6m	6.9m	-	-

For more information regarding throw distances, please visit: www.canon.com/lcd-sim

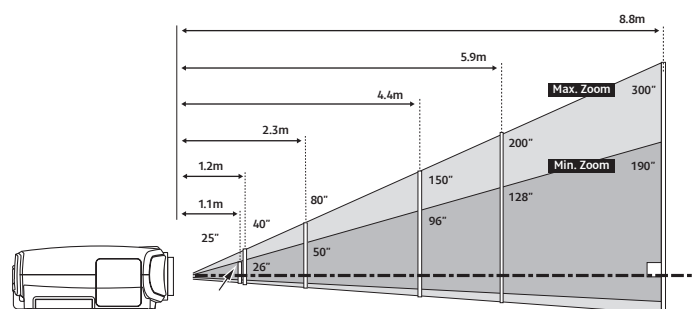

you can
Canon

Canon Inc
www.canon.com

Canon Europa NV
www.canon-europe.com

English-UK Edition
© Canon Europa N.V., 2006 (0207)

Canon (UK) Ltd
Woodhatch, Reigate
Surrey RH2 8BF
Telephone No: 08000 353535
Facsimile No: 01737 220022
www.canon.co.uk

