Christie G Series

Boardrooms

Houses of worship

Conference rooms

Museums







▲ Two models available Christie DHD550-G and Christie DWU550-G



Unsurpassed value, versatility, long-life performance

What does value mean to you? We think it's the fine balance between quality, performance, support, and value. The Christie® G Series offers you unsurpassed value – with energy saving features, low maintenance costs, numerous standard features, and the best warranty and support in the industry.

Built with proven DLP® technology, the Christie G Series gives you excellent image quality and reliability. At 5000 lumens, this is the brightest platform in its category. High brightness combined with powerful features, including wireless connectivity, makes the Christie G Series a perfect fit for a variety of applications.


Ideal for 24/7 operation, the filter-free, dust-sealed design prevents dust and dirt from affecting the projector – ensuring that image quality is preserved and maintenance costs are minimal. The Christie G Series is packed with ProAV features, including two resolution options, HD and WUXGA, built-in color matching for a more uniform image in a multi-projector configuration, and blending and warping capabilities to handle curved surfaces.

If you need a projector that is easy to install and configure and offers unsurpassed value, the Christie G Series is right for you.

Show your audience amazing images

People tend to associate great image quality with high cost. That doesn't have to be the case. You can enjoy stunning images with the Christie G Series at a low total cost of ownership.

The Dynamic Contrast feature further enhances the image quality of the Christie G Series by increasing the contrast ratio to 5000:1. This series ships standard with a high brightness, six-segment color wheel for maximum brightness and excellent color range.



▲ 1-chip DLP technology

High brightness

The brightest in its class, the G Series delivers exceptional images.

Christie DHD550-G: 5000 ANSI lumens -HD (5500 center lumens)

Christie DWU550-G: 5100 ANSI lumens -WUXGA (5600 center lumens)


Six-segment color wheel


Comes with high brightness color wheel for standard applications and uses.

| Two resolution options | | | | |
|------------------------|--|--|--|--|
| Native HD model | Maintain and maximize your brightness | | | |
| WUXGA model | Ideal for graphic intensive applications | | | |



▲ Christie G Series lamp

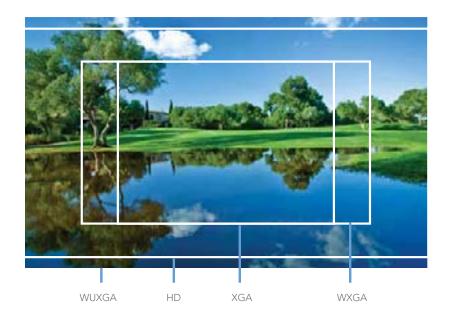

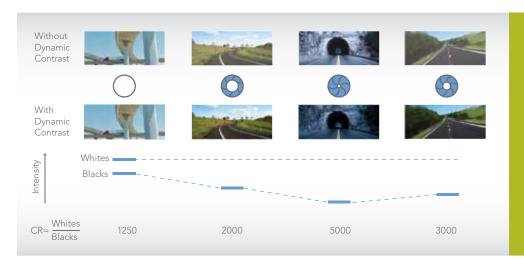



Dynamic Contrast

With the Dynamic Contrast enabled, up to 5000:1 contrast can be achieved. Ideal for video applications, the Dynamic Contrast automatically adjusts an internal iris to extend the range of blacks and provide richer details during dark content for true image reproduction.

Color matching

When used with multiple projectors, this feature ensures accurate color matching and uniformity across the entire image.



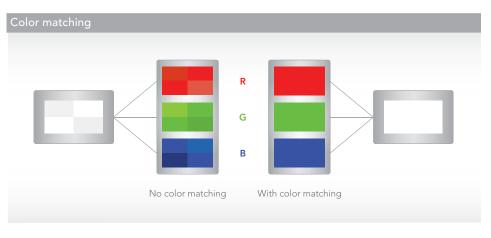

Constant intensity mode


For tiled arrays, the constant intensity mode automatically increases brightness as the lamps wear out over time in order to maintain the overall brightness and image consistency across the display.



▲ Without constant intensity mode



▲ With constant intensity mode

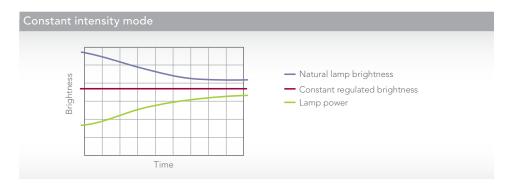

We understand the unique needs of your application

No application requirements are the same. We strive to pack all the features crucial to the success of your display into one compact chassis minimizing the expense of purchasing additional "out of projector" technologies. The Christie G Series is the full package. Its single lamp design lowers your cost of ownership without compromising image quality. Wireless connectivity opens the door for easy connection and clean presentation space. Three lens choices, input options and 360 degree projection are all designed to give you the flexibility to pick whatever you need to capture the attention of your audience.



24/7 use capability

The G Series offers sealed, dust-free housing and heat-pipe cooling system that enables the projector to run 24 hours a day, 7 days a week in continuous operation.

Security lock

Multi-purpose security lock bar plus Kensington security slot provide options for anti-theft.

White-colored cable cover (optional)

White chassis color and an optional cable cover gives you a crisp, clean, uncluttered look ultimately maximizing environment aesthetics and architectural design features.









▲ G Series cable cover

Picture-in-picture/picture-by-picture functions offer different layout options

| PIP/PBP | Main | | | | | | | | | | |
|-------------------|--------|--------|-----------------|-----|-----|-----------|---------|-----------|------|----------------------|------------|
| | HDMI 1 | HDMI 2 | Display port | VGA | BNC | Component | S-video | Composite | RJ45 | USB type B (mini) | USB type A |
| HDMI 1 | _ | • | - | - | • | _ | • | • | • | • | • |
| HDMI 2 | • | _ | • | • | _ | • | _ | _ | _ | _ | _ |
| Display port | _ | • | _ | _ | • | _ | • | • | • | • | • |
| VGA | _ | • | _ | _ | • | _ | • | • | • | • | • |
| BNC | • | _ | • | • | _ | • | _ | _ | _ | _ | _ |
| Component | _ | • | _ | _ | • | _ | • | • | • | • | • |
| S-video | • | _ | • | • | _ | • | - | _ | _ | _ | _ |
| Composite | • | _ | • | • | _ | • | _ | _ | _ | _ | _ |
| RJ45 | • | - | • | • | _ | • | _ | _ | _ | _ | - |
| USB type B (mini) | • | - | • | • | _ | • | _ | _ | _ | _ | - |
| USB type A | • | _ | • | • | _ | • | _ | _ | _ | _ | _ |

⁼ PIP/PBP combinations are enabled

 ⁼ PIP/PBP combinations are disabled



- 1 Remote in
- 2 Remote out
- 3 Red/Pr
- 4 Blue/Pb
- 5 Green/Y
- 6 CVBS
- 7 S-video
- 8 RS-232

- 9 Ethernet
- 10 Mini USB
- 1 USB
- 12 Display port
- 13 HDMI
- 14 VGA-IN
- 15 VGA-OUT
- 16 DVI

Interchangeable lenses with 100% offset

Lenses with 100% offset helps make installation and configuration easy, even in the most demanding installation situations. It also makes it possible to take advantage of existing mounting and hardware assets and reduces costs.

Input options

Wireless option

One HDMI (also double as DVI with supplied adapter)

One display port

Analog

Network

USB and network input

Projector control

Control the projector through a web user interface.

SNMP (simple network management protocol) lets you remotely monitor a Christie projector and get status changes on various parameters.

Christie Presenter

The Christie Presenter application allows up to four remote desktops from host PC's to be displayed on the network through Ethernet, USB, or wireless transports. It can adapt to different network settings (DHCP, fixed IP, and direct link by USB/ Ethernet cable).

Wireless projection


Easy connectivity


Less cluttered meeting space

Cable-free management



▲ Christie Presenter






▲ Wireless capability

360 degree projection

The Christie G Series can project on a table top, be ceiling-mounted, straight down or straight up. However you spin it, the Christie G Series will fit your needs.





▲ 360 degree projection

▲ Dual processor warp module

Motorized zoom, focus and lens shifts

For easy installation and configuration, the Christie G Series comes with motorized zoom, focus and lens shift to ensure your image is aligned tight within the desired viewing area for every presentation. The mechanical shutter allows for quick pauses in your display when the need arises to shutter the image.

Blending and warping capabilities (optional)

Coupled with the internal color matching functions, blend and warp capabilities enable the projector to be used in high-end applications where large images are needed. An optional dual processor warp module is required to blend and warp displays.

Warp modes: Keystone, 4-Corner, Curve, Pincushion, Barrel and Rotation¹

| Projection surface | Warping capabilities |
|--------------------|----------------------|
| Curved screens | |
| | |
| Tilted screen | |

¹ Reference User Manual for combination compatibility of warp modes.



A suite of lens options to choose from


Our suite of lenses for HD and WUXGA resolutions increases installation flexibility.

Accessories and options

| Description | | Part Number | | |
|----------------------------|----------------|---------------|--|--|
| Lenses | 0.95-1.22 zoom | 140-101103-01 | | |
| | 1.22-1.52 zoom | 140-100102-01 | | |
| | 1.52-2.89 zoom | 140-102104-01 | | |
| Ceiling mount | | 140-105107-01 | | |
| Ceiling mount extension | | 104-101001-XX | | |
| Dual processor warp module | | 133-111104-01 | | |
| Wireless dongle | | 133-113106-01 | | |
| Cable cover | | 140-103105-01 | | |
| Lamp | | 003-004451-01 | | |



▲ Christie G Series wireless dongle

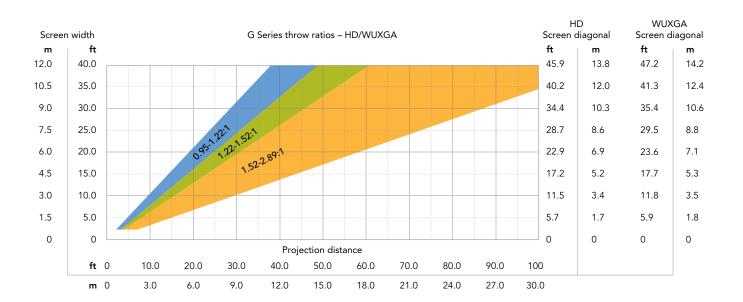

Going above and beyond

In addition to high quality products, what makes Christie different

We go above and beyond to take care of our customers. Customers keep coming back to us because they can't get the same level of

We care about our customers. Your satisfaction is our ultimate goal. We stand behind our products and support you with our second-tonone warranty and service programs.



Christie support and service

All Christie products are backed by industryleading warranties, renowned service and support. We ensure our customers are well supported with training, service and technical support through our extensive distribution and support network.

Christie has local support on five continents offering support for international installations and global deployments.

We offer customer-centric service with years of extensive experience in varieties of applications.

Environmental

At Christie we recognize our responsibility to control the impact of our business on the environment. We take pride in offering eco-friendly features in our products that are not only good for the environment, but also lower total cost of ownership for our customers.

Christie G Series includes features that support our commitment to being eco-friendly.

Eco mode

493.76 [19.44] 383.76 [15.11]

22.00 [.87] MIN 27.7 [1.09] MAX


15.83 [.62]


0.5W standby mode


Auto shut down

Sleep timer: save energy by controlling when the projector goes to sleep

19.76 [.78]

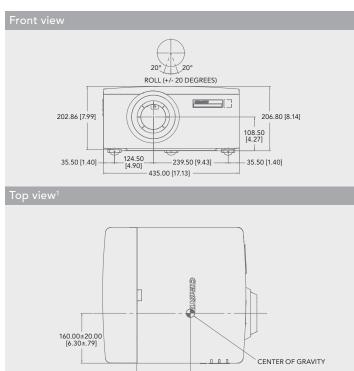

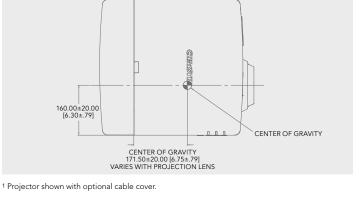

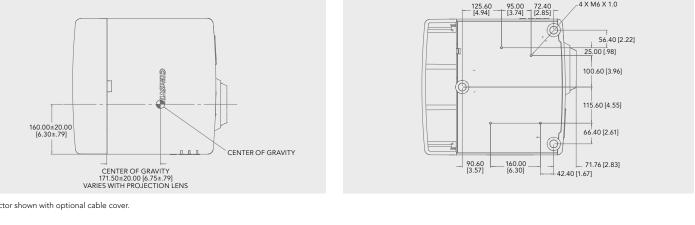

| | | Christie DHD550-G | Christie DWU550-G | | | | |
|-------------------------|-------------------|--|---|--|--|--|--|
| lmage | brightness | • 5500 center lumens - HD (5000 ANSI lumens) • 5600 center lumens - WUXGA (5100 ANSI lume | | | | | |
| | color wheel | 6 Segment (RGBCYW) | ' | | | | |
| | contrast | • 5000:1 (Dynamic Contrast enabled); 1200:1 (full on/off); 250:1 ANSI | | | | | |
| Display | type | • 1-chip 0.65" DMD | | | | | |
| | native resolution | • 1920 x 1080 (2,073,600 pixels) 16:9 | • 1920 x 1200 (2,304,000 pixels) 16:10 | | | | |
| Lamp | type | • 370W P-VIP | | | | | |
| - | typical lifetime | • 1500 hrs minimum @ 370W • 2000 hrs typical @ 280W | | | | | |
| Inputs | standard | • HDMI x 1 • DVI-D x 1 (Digital only) • Display port x 1 • HD15 x 1 • Composite video x 1 (RCA) • S-Video x 1 (mini DIN) • Component video (RCA) • USB x 1 (type B mini) - Display over USB • USB x 1 (type A) - Image viewer or WiFi dongle (optional) • RJ45 x 1 | | | | | |
| | signals | • HDTV formats VGA through to WUXGA (1920 x 1200) • Horizontal and vertical scaling while maintaining aspect ratio, all inputs | | | | | |
| | pixel clock | • 162 MHz | | | | | |
| | scan rates | • Horizontal: 15-100kHz • Vertical: 24-85Hz | | | | | |
| Outputs | monitor out | • HD15 x 1 | | | | | |
| Control and netv | vorking | • RS-232 in • Ethernet (10/100) RJ45 with ChristieNET™ connectivity • Built-in backlit keypad • Wired remote control (3.5r | | | | | |
| Accessories | standard | • IR Remote with wired remote jack (wire not included) • AC Line cord for projector head • User manual | | | | | |
| | optional | 1DWUSB-BGN (wireless dongle for video and control) • Warp module • Cable cover • Ceiling mount • Ceiling mount extension | | | | | |
| Lens mount | type | *Tool-free lens insertion system * Boresight adjustable * Motorized horizontal and vertical lens offset *Motorized zoom and focus adjustment | | | | | |
| Lenses | zoom | • 0.95-1.22:1 HD • 1.22-1.52:1 HD • 1.52-2.89:1 HD | | | | | |
| | offsets | Vertical: ± 120% (± 648 pixels) Horizontal: ± 20% (± 192 pixels) | Vertical: ± 100% (± 600 pixels) Horizontal: ± 20% (±192 pixels) | | | | |
| Power operating voltage | | • 100-240 VAC 50/60Hz | | | | | |
| requirements | consumption | • 510W maximum • 405W eco mode | | | | | |
| | operating current | • 6A maximum | | | | | |
| | dissipation | • 1740 BTU/hr maximum • 1382 BTU/hr eco mode | | | | | |
| Physical specs | size | • (LxWxH) 15.28 x 17.13 x 8.15" (388 x 435 x 207mm) without feet | | | | | |
| | shipping size | • (LxWxH) 19.49 x 23.03 x 16.14" (495 x 585 x 410mm) without feet | | | | | |
| | weight | • 33.1lbs (15kg) | | | | | |
| | shipping weight | • 41.2lbs (18.7kg) | | | | | |
| Operating environment | | • Temperature: 40-95°F (5-35°C) • Humidity: 0-90% non-condensing | | | | | |
| Regulatory | | UL/CSA/IEC 60950-1 • FCC Class A, CE, CCC, KC, Gost-R, PSE, C-tick, and South Africa This product conforms to all relevant European directives, standards, safety, health and environmental concerns RoHS, REACH, WEEE | | | | | |
| Limited warranty | | Three years parts and labor (including light engine) Contact an authorized Christie representative for full details. | ails of our limited warranty | | | | |













Corporate offices

Christie Digital Systems USA, Inc. USA – Cypress ph: 714 236 8610

Christie Digital Systems Canada Inc. Canada – Kitchener ph: 519 744 8005

Independent sales consultant offices

Italy ph: +39 (0) 2 9902 1161

Worldwide offices

United Kingdom ph: +44 (0) 118 977 8000

Germany ph: +49 2161 664540

France ph: +33 (0) 1 41 21 44 04

Spain ph: +34 91 633 9990

Eastern Europe and Russian Federation ph: +36 (0) 1 47 48 100 Republic of South Africa ph: +27 (0)11 510 0094

United Arab Emirates ph: +971 4 3206688

India ph: +91 80 6708 9999

Singapore ph: +65 6877 8737 China (Shanghai) ph: +86 21 6278 7708

China (Beijing) ph: +86 10 6561 0240

Japan (Tokyo) ph: 81 3 3599 7481

Korea (Seoul) ph: +82 2 702 1601







Copyright 2012 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Christie Digital Systems Canada Inc.'s management system is registered to ISO 9001 and ISO 14001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice. Printed in Canada on recycled paper. 3377 Oct 12

