

EPSON®
EXCEED YOUR VISION

Epson
EB **1700 Series**

Epson EB **1700 Series**



Bright, light and smart,
the ideal presentation partner



The Epson EB-1700 Series has the power to deliver bright, high-contrast images in clear colours. It's also lightweight and compact, ideal for the busy professional on the move, on customer calls or attending many different meetings in the office.

This projector is also very easy to set up and operate, leaving you free to concentrate on your audience and your presentation. Quiet and compact, it would go unnoticed if it wasn't so good to look at.


EasyMP™

1) Wireless connection

Present directly and securely through a wireless network. It is possible to send video data with sound. Remote management of all your networked projectors via wired or wireless LAN.

2) Operate 4 projectors simultaneously,

to create a panorama or show different applications.

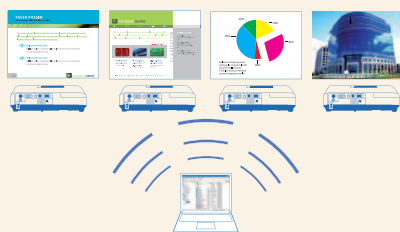

3) PC Free

Go light, leave your PC behind. Simply plug in your USB key and start your presentations, slideshows or movies.



Exclusive 3-in-1 USB Display

A single, long USB cable replaces three to carry all signals – image, sound and mouse control data (for mouse cursor and Page Up/Down).

This unique and extremely convenient feature means no more having to play with wires in front of your audience.

And combined with the remote control you can also project and slideshow your presentation easily at a distance.

Available on Epson EB-1725 and EB-1735W



Certified for Windows Vista™ Network Projector function

Connect the Epson EB-1725 and Epson EB-1735W projectors to a PC with Windows Vista™* and launch the network projector function (WLAN or LAN): no need to install additional applications, no administrator rights needed.

*excluding "Home Basic Edition"

Stylish



◀ **Eye-catching yet practical.** No bigger than an A4 sheet of paper, rounded edges give the Epson EB-1700 Series an appealing modern look that matches its compactness and low weight.

▶ A pleasure to carry

Being so light and attractive the Epson EB-1700 Series deserves a stylish protective carrying case. Accessories are held securely and are accessible in seconds.



Epson EB 1700 Series



1.7Kg/1.8Kg



3000lm

AV mute slide

A sliding **lens shutter** can instantly cut the beam so that the audience can focus entirely on you.

Quick and easy

Set up takes only six seconds while **shut down** is virtually immediate with no cooling down – unprecedented for a 3000lm lamp.

A **front exhaust** pushes out hot air at the front rather than the sides, so the projector can be placed close to your audience without bothering them.

The Epson EB-1700 series has a **short throw lens**: project a stunning 60" image from just 1.26m!



Wireless Module + Quick Wireless Connection*

Setting up the wireless function takes 60 seconds the first time. Every time after that you just plug the provided USB key into your laptop, wait about 10 seconds – and your desktop is being projected!

*Available on Epson EB-1725 and EB-1735W

WIDE

The Epson EB-1700 Series offers you a mix of XGA and WXGA resolution.

The wide screen (1280x800) resolution is the same as most laptop PCs so the projector is ready to project exactly what is on your PC screen without the need to adjust settings.

WXGA offers 30% more space compared to XGA (1024x768) resolution.

Epson EB 1720



XGA



1.7Kg

Epson EB 1725



XGA



1.8Kg

EasyMP™



Epson EB 1730W



WXGA



1.7Kg

Epson EB 1735W



WXGA



1.8Kg

EasyMP™





Epson EB-1720

Epson EB-1730W


Epson EB-1725

Epson EB-1735W

SPECIFICATIONS				
Projection system (3LCD)	0.7" with MLA (x3) TFT	0.74" with MLA (x3) TFT	0.7" with MLA (x3) TFT	0.74" with MLA (x3) TFT
Native resolution	XGA (1024 x 768)	WXGA (1280 x 800)	XGA (1024 x 768)	WXGA (1280 x 800)
Native aspect ratio	4:3	16:10	4:3	16:10
Resolution supported	VGA – UXGA	VGA – UXGA	VGA – UXGA	VGA – UXGA
Brightness (High / Low)	3000 ANSI lm / 1900 ANSI lm	3000 ANSI lm / 1900 ANSI lm	3000 ANSI lm / 1900 ANSI lm	3000 ANSI lm / 1900 ANSI lm
Projection lens				
Throw ratio	1.09-1.34 : 1	0.98-1.20 : 1	1.09-1.34 : 1	0.98-1.20 : 1
F Number	1.58 - 1.68	1.58 - 1.68	1.58 - 1.68	1.58 - 1.68
Focal Length	16.1 mm - 19.3 mm	16.1 mm - 19.3 mm	16.1 mm - 19.3 mm	16.1 mm - 19.3 mm
Focus/Zoom type	Manual focus/ 1.2 x Optical Zoom	Manual focus/ 1.2 x Optical Zoom	Manual focus/ 1.2 x Optical Zoom	Manual focus/ 1.2 x Optical Zoom
Offset	6:1	7.6:1	6:1	7.6:1
Lens protection	A/V mute slide	A/V mute slide	A/V mute slide	A/V mute slide
Lamp				
Type	E-TORL 170W UHE	E-TORL 170W UHE	E-TORL 170W UHE	E-TORL 170W UHE
Life	4000 hours / 3000 hours (Low/High brightness mode)	4000 hours / 3000 hours (Low/High brightness mode)	4000 hours / 3000 hours (Low/High brightness mode)	4000 hours / 3000 hours (Low/High brightness mode)
Colour Reproduction	Full-Colour (16.77 million colours)	Full-Colour (16.77 million colours)	Full-Colour (16.77 million colours)	Full-Colour (16.77 million colours)
Fan noise	Low/High brightness mode: 30 dB / 39 dB	Low/High brightness mode: 30 dB / 39 dB	Low/High brightness mode: 30 dB / 39 dB	Low/High brightness mode: 30 dB / 39 dB
Contrast ratio	2000:1	2000:1	2000:1	2000:1
Screen size (Projection distance)	30" to 300" (0.65m - 8.26m)	30" to 300" (0.62m - 7.83m)	30" to 300" (0.65m - 8.26m)	30" to 300" (0.62m - 7.83m)
Keystone correction	Vertical (automatic): ± 30 °	Vertical (automatic): ± 30 °	Vertical (automatic): ± 30 °	Vertical (automatic): ± 30 °
Input				
Computer	1xD-sub 15-pin (RGB)	1xD-sub 15-pin (RGB)	1xD-sub 15-pin (RGB)	1xD-sub 15-pin (RGB)
Video	1xD-sub 15-pin (component), 1xRCA, 1xS-Video	1xD-sub 15-pin (component), 1xRCA, 1xS-Video	1xD-sub 15-pin (component), 1xRCA, 1xS-Video	1xD-sub 15-pin (component), 1xRCA, 1xS-Video
Audio	1xStereo mini-jack	1xStereo mini-jack	1xStereo mini-jack	1xStereo mini-jack
USB Display	-	-	1xUSB 2.0 type B	1xUSB 2.0 type B
Control	USB Type B	USB Type B	USB Type B	USB Type B
Network	-	-	LAN via RJ45 (Optional Ethernet module)	LAN via RJ45 (Optional Ethernet module)
Output	-	-	1xStereo mini-jack (selectable in OSD menu)	1xStereo mini-jack (selectable in OSD menu)
Built-in speaker	1 W monaural	1 W monaural	1 W monaural	1 W monaural
Direct Power On/ Instant Off	Yes	Yes	Yes	Yes
Security	Kensington lock hole	Kensington lock hole	Kensington lock hole	Kensington lock hole
Other functions	Front Exhaust, Auto Source Search, A/V Mute slide, Auto Detection of RGB, Password Protected Function, 8 Colour Modes, High Altitude Mode, User logo, Freeze, E-Zoom, Help, Test Pattern, User button on remote control			
Operating temperature / altitude	5°C to 35°C / 0 to 2,286m (High Altitude Mode over 1500m)	5°C to 35°C / 0 to 2,286m (High Altitude Mode over 1500m)	5°C to 35°C / 0 to 2,286m (High Altitude Mode over 1500m)	5°C to 35°C / 0 to 2,286m (High Altitude Mode over 1500m)
Power supply wattage	100 - 240 V AC ±10%, 50/60 Hz	100 - 240 V AC ±10%, 50/60 Hz	100 - 240 V AC ±10%, 50/60 Hz	100 - 240 V AC ±10%, 50/60 Hz
Power consumption lamp on	230W	230W	230W	230W
Power consumption stand-by	5.5W (network off) / 10W (network on)	5.5W (network off) / 10W (network on)	5.5W (network off) / 10W (network on)	5.5W (network off) / 10W (network on)
Weight	1.7Kg	1.7Kg	1.8Kg	1.8Kg
Dimension (D x W x H)	202x 284 x 65mm (excluding feet)	202x 284 x 65mm (excluding feet)	202x 284 x 65mm (excluding feet)	202x 284 x 65mm (excluding feet)
On-screen menu	27 languages: English,French,German,Italian,Spanish, Catalan, Portuguese, Russian, Ukrainian, Dutch, Danish, Hungarian, Czech, Polish, Romanian, Slovenian, Norwegian, Finnish, Swedish, Greek, Turkish, Arabic, Japanese, Chinese, Traditional Chinese, Korean, Thai			
SUPPLIED ACCESSORIES				
Power Cable	3m	3m	3m	3m
Computer Cable	1.8m D-SUB 15 pin (Male/Male)	1.8m D-SUB 15 pin (Male/Male)	1.8m D-SUB 15 pin (Male/Male)	1.8m D-SUB 15 pin (Male/Male)
USB Cable	-	-	3.0m,USB A/USB B HI-SPEED (New)	3.0m,USB A/USB B HI-SPEED (New)
Audio adaptater	3.5 mm stereo miniplug (male) <-> RCA jack x2(female) 15 cm included - New design	3.5 mm stereo miniplug (male) <-> RCA jack x2(female) 15 cm included - New design	3.5 mm stereo miniplug (male) <-> RCA jack x2(female) 15 cm included - New design	3.5 mm stereo miniplug (male) <-> RCA jack x2(female) 15 cm included - New design
Soft carry case	With 2xAA type batteries	With 2xAA type batteries	With 2xAA type batteries	With 2xAA type batteries
Remote Control	-	-	included	included
Epson Projector Software (CD-ROM)	-	-	included 802.11a/b/g (WN6501CEP)	included 802.11a/b/g (WN6501CEP)
Wireless LAN unit	-	-	including 2 x 8mm screws	including 2 x 8mm screws
Quick Wireless Connection USB key	-	-	USB flash memory with software (automatic installation)	USB flash memory with software (automatic installation)
Password Protect Sticker	included	included	included	included
User Manual	included	included	included	included
Warranty*	3 years (including 1 year or 1000 hours on lamp)	3 years (including 1 year or 1000 hours on lamp)	3 years (including 1 year or 1000 hours on lamp)	3 years (including 1 year or 1000 hours on lamp)

Advanced Functions	EPSON EB-1725 / EB-1735W
Certified for Windows Vista™ Network Projector function	Wireless or wired connection between projector and computer with Windows Vista™ operating system (excluding Home Basic edition)
EASY MP™ FUNCTIONS	
Wired/Wireless connection <ul style="list-style-type: none">Wireless connectionQuick wireless connection <ul style="list-style-type: none">Advanced Functions3 in 1 USB Display	Wireless LAN (802.11a/b/g) WEP: 128bit/64bit, WPA-PSK: TKIP/AES, WPA2-PSK: TKIP/AES, EAP(WiFi/WPA): EAP-TLS, EAP-TTLS/MD5, EAP-TTLS/MS-CHAPV2, PEAP/MS-CHAPV2, PEAP/GTC EAP(Cisco): CCXv4, LEAP, EAP-Fast/MS-CHAPV2, EAP-Fast/GTC Multi-screen display (up to four projectors) with Windows 2000 and XP, Movie sending (MPEG2, WMV), MAC OS 10.3 and 10.4 compatible, WPS 1xUSB type B
PC free function <ul style="list-style-type: none">InputSupported formats	1xUSB type A IMAGE: JPEG/BMP/GIF/PNG - MOVIE: MPEG2/MPEG4 ASP/MPEG4 AVC(H.264)/WMV8,9 PRESENTATION SCENARIO: SIT (created by EMP Slidemaker2)
Network monitoring and control function <ul style="list-style-type: none">Function	Projector control and projector management via network (wireless or wired LAN), E-mail notification, SNMP, Web control, PJ-Link, Projector Control
Easy MP Software	EMP NS Connection (for Windows and Mac), EMP Monitor (for Windows), EMP Slide Maker2 (for Windows), EPSON Projector Control Software (for Windows), Epson Quick Wireless Connection

* Warranty offers are not available for all countries. Please contact your local Epson representative.

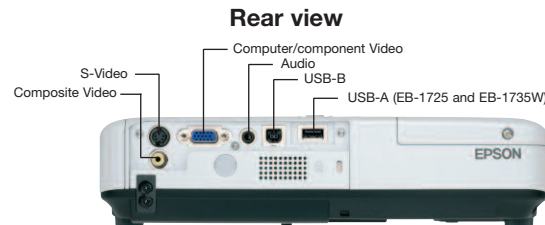

For further information please contact your local Epson office or visit www.epson-europe.com

Austria 0810/20 01 13 (0,07 €/Min.) **Belgium** 070/350120 (0.1735 €/min.) **Czech** 800/142 052 **Denmark** 44 50 85 85
Finland 0201 552 091 **France** 0821 010 100 (0,12€/min) **Germany** 01805/23 41 10 (0,14 €/Min.) **Greece** 210-8099499
Hungary 06800 147 83 **Ireland** 1 800 409132 **Italy** 02-660321 10 (0,12 €/min.) **Luxembourg** 900/43010 (0,24 €/min.)
Middle East +9714 8818934 **Netherlands** 0900-5050808 (0.05 €/oproep + 0.15 €/min.) **Norway** 22 06 42 80
Poland 0-0-800 4911299 (0,16 zł/min.) **Portugal** 707 222 111 **Russia** (095) 777-03-55 **Slovakia** 0850 111 429
South Africa (+2711) 465-9621 **Spain** 93 582 15 00 **Sweden** 0771-400135 (Mobilsamtal – 0,99 kr/min, Lokala samtal – 0,30 kr/min, Utlandssamtal – 0,89 kr/min) **Switzerland** 0848 448820 (4-8 cent./min.) **Turkey** (0212) 3360303
United Kingdom 0871 222 6702

Epson® is a registered trademark of Seiko Epson® Corporation. All other product names and other company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice.

Entity carrying out management and coordination pursuant to article 2497 bis of Civil Code: Epson Europe BV

EPSON®