



42" LCD MONITOR

# LDT422V

- ADVANCED HIGH-DEFINITION DIGITAL SIGNAGE DISPLAY
- FULL HD 1920 X 1080 NATIVE RESOLUTION
- HIGH QUALITY IMAGE FOR VIRTUALLY ANY APPLICATION
- MULTIPLE SCREEN SAVER FUNCTION
- PROGRAMMABLE SCHEDULING
- CLOSED CAPTION SUPPORT
- ENERGY STAR COMPLIANT


LEADING THE EVOLUTION OF  
**HIGH-DEFINITION**  
DIGITAL SIGNAGE



# 42" LCD MONITOR LDT422V



## MULTIPLE STANDARD INPUT AND OUTPUT CONNECTORS

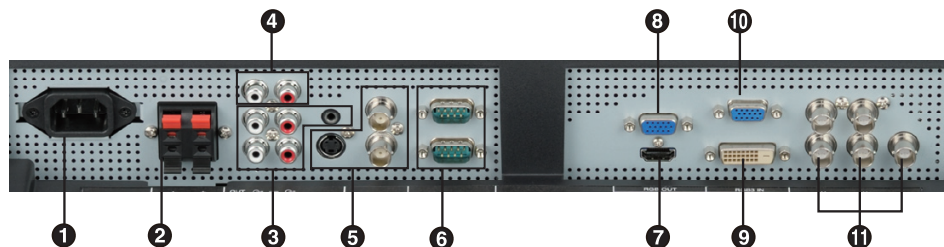

- |                                       |                                |
|---------------------------------------|--------------------------------|
| ① AC In (3 Pin, with earth terminal)  | ⑦ RGB 1 In (HDMI)              |
| ② External Speaker Terminal           | ⑧ RGB Out (Mini D-sub 15 Pin)  |
| ③ Audio In                            | ⑨ RGB 2 In (DVI-D)             |
| ④ Audio Out (RCA)                     | ⑩ RGB 3 In (Mini D-sub 15 Pin) |
| ⑤ Video Input/Output (BNC/S-Terminal) | ⑪ RGB 4 In, DVD/HD In (BNC)    |
| ⑥ RS-232C Connector (D-sub 9 Pin)     |                                |

CLASS	42" (Diagonal) LCD Monitor
VIEWABLE IMAGE SIZE	36.6" x 20.6"
NATIVE RESOLUTION	1920 x 1080 (Full HD)
ORIENTATION	Landscape / Portrait
BRIGHTNESS/LUMENS	500 cd/m <sup>2</sup>
PIXEL PITCH	0.485 mm
CONTRAST RATIO	1300:1
DIMENSIONS (W x H x D in.)	40.3" x 24.2" x 5.2" (without stand)
WEIGHT (WITHOUT STAND AND SPEAKERS)	45.2 lbs. (Net)
BEZEL WIDTH	1.7"
RESPONSE TIME	9 ms (gray to gray)
VIEWING ANGLE	Horizontal and vertical: 178°
VIDEO/AUDIO INPUTS AND OUTPUTS	mini D-Sub 15 pin In/Out, HDMI, DVI-D, S-Video, Composite BNC In/Out, Component 5 BNC, Audio L/R (RCA), Audio Stereo mini jack
SPEAKER OUTPUT	External Speaker Jack
CONTROL INPUT/OUTPUT	RS232C (mini D-Sub 9 In/Out)
POWER CONSUMPTION (WITHOUT SPEAKERS)	182 W
ESTIMATED BACKLIGHT LIFE	Up to 50,000 hours*
AUDIO SPEAKER	Optional: SP-422V
TABLE STAND	Optional: ST-422V
WALL MOUNT COMPATABILITY	12-M6 screw holes (100mm / 3.94" pitches) for monitor mount
WARRANTY	3-years parts and labor, Express Replacement Assistance, toll-free 24x7 technical support

\*Results may vary depending on usage and operating environment