





Projected Image comparison (with 60-inch screen)



Due to extended longer distance, the instructor is With the projector installed close to the screen forced to stand directly between the projector and the projector light does not get in the instructor's the screen. When facing the students, the projector eyes even when directly facing the students. light enters the instructor's field of vision.

This proximity also keeps the instructor's shadow This can blind the instructor, whose shadow may off the presentation contents.

- ▶ 2000 ANSI lumens
- ▶ 2500:1 Contrast ratio
- ▶ Closed caption for the hearing impaired
- ▶ Optional Whiteboard and Blackboard modes
- ▶ Center lens design for easy symmetrical installations
- ▶ Splash screen and wall screen support
- ▶ Audio and video inputs for computer and video sources
- ▶ Time saving shut down feature

Easy Maintenance & Security Features

- ▶ Top-access lamp cover for easy lamp replacement
- ▶ Filter-free design
- ▶ Enhanced security features with reinforced anti-theft security bar and password protection



Splash screen




Top Access Lamp Cover

Mitsubishi Electric's Engineering Yields **Superior Color Performance**

BrilliantColor™ Technology is Texas Instruments latest innovation in producing amazing, rich, and vibrant colors. At Mitsubishi Electric, we developed a 6-segment color wheel that includes the colors of R,G,B,W,Y,C. Apart from the typical red, green, blue and white, we added yellow and cyan segments to display a wider color spectrum. In addition, we coded our color algorithms to emphasize brightness or color modes, designed to match the environment where the XD500U-ST is used.

Together with selective lamp powered modulation techniques, the XD500U-ST with BrilliantColorTM technology acts intelligently to boost colors to improve the intensity and vibrancy of an entire display. For instance, when projecting an already-bright screen image, the lamp is programmed to provide brighter, more vivid colors. In contrast, if the image shows genuine color reproduction, the algorithm delivers just the right colors with the appropriate radiance for maximum visual impact.

*BrilliantColor is a trademark of Texas Instruments.








Non-BrilliantColor



XD500U-ST




Input and Output Terminals



- PC / Component Video output
- PC / Component Video input (mini D-sub 15 pin)
- 3 S-Video / RCA
- 4 Audio input [RCA jack (L/R)]
- 5 Audio input (stereo mini jack)
- 6 Audio output
- Serial RS-232C
- **8** USB terminal for Page Up/Down

| Specifications | |
|-------------------------|---|
| Model | XD500U-ST |
| Display technology | 0.55"1-Chip DMD, 12 deg. LVDS, DD2230 |
| Resolution | 1024 x 768 (total 786,432 pixels) |
| Brightness | 2000lm |
| Contrast ratio | 2500:1 (on-off) |
| Projection lens | f=7.7mm, F=2.8 |
| Offset axis | 14.3 : -1 |
| Throw ratio | 0.7" |
| Picture size | 40" ~ 300" |
| Source lamp | 230W (Shut Off Time 3000Hrs) with Low Mode, 280W (shut Off Time 2000Hrs) with Standard Mode |
| Computer compatibility | 640 x 480 ~ 1280 x 1024, True: 1024 x 768, Sync on green available |
| Video compatibility | NTSC / NTSC4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component Video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz) |
| Input terminals | RGB: mini D-sub15pin x 2, Video: RCA x 1 + S-video x 1 Audio: stereo mini jack (ϕ 3.5mm) x 1, RCA jack (L/R) x 1 |
| Output terminals | RGB: mini D-sub15pin x 1, Audio : stereo mini jack (ø3.5mm) x 1 |
| Communication terminals | RS-232C (D-sub 9pin) x 1, USB terminal for Page Up/Down x 1 |
| Audio speaker | 2W mono |
| Dimensions (W x H x D) | 332 x 102 x 250 mm / 13.1 x 4.0 x 9.8 inch (excluding height adjustment) |
| Weight | 3.3kg / 7.3lbs |
| Power supply | AC100-240V, 50/60Hz |
| Optional lamp | VLT-XD520LP |
| Warranty | 3-Years Parts/Labor, 3-Years Express Replacement Assistance, 1-Year or 500 hours lamp warranty (whichever comes first) |
| Accessories | Ceiling Mount (PROJ-UCM-PRO2 - Universal Ceiling Mount), Hard Shell Rolling Case (DKT1-ATAC), Soft Carrying Case (XL1-SSCC), Soft Rolling Case (DKT1-SRCC) |

^{*} All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

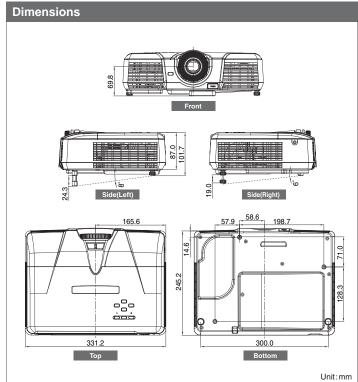

Screen size and Projection distance As seen from the side Projection Distance(L) Screen size chart Screen (4:3 aspect ratio) Diagonal size Width (W) Height (H) inch cm inch cm inch du 102 32 81 24 60 152 49 122 36 61 22 55 1.8 5

| | Diagonal size | | Width (W) | | Height (H) | | screen (L) | | image (Hd) | |
|-----|---------------|-----|-----------|-----|------------|-----|------------|-----|------------|----|
| i | nch | cm | inch | cm | inch | cm | inch | cm | inch | cm |
| | 40 | 102 | 32 | 81 | 24 | 61 | 22 | 55 | 1.8 | 5 |
| | 60 | 152 | 48 | 122 | 36 | 91 | 33 | 83 | 2.7 | 7 |
| | 80 | 203 | 64 | 163 | 48 | 122 | 44 | 112 | 3.6 | 9 |
| | 100 | 254 | 80 | 203 | 60 | 152 | 55 | 140 | 4.5 | 11 |
| | 150 | 381 | 120 | 305 | 90 | 229 | 83 | 212 | 6.8 | 17 |
| 2 | 200 | 508 | 160 | 406 | 120 | 305 | 111 | 283 | 9.0 | 23 |
| 2 | 250 | 635 | 200 | 508 | 150 | 381 | 139 | 354 | 11.3 | 29 |
| - (| 300 | 762 | 240 | 610 | 180 | 457 | 167 | 425 | 13.5 | 34 |
| | | | | | | | | | | |

| Screen(16:9 aspect ratio) | | | | | | Distance from | | Height projected | |
|---------------------------|-----|-----------|-----|------------|-----|---------------|-----|------------------|-----|
| Diagonal size | | Width (W) | | Height (H) | | screen (L) | | image (Hd) | |
| inch | cm | inch | cm | inch | cm | inch | cm | inch | cm |
| 40 | 102 | 35 | 89 | 20 | 50 | 23 | 60 | 5.2 | 13 |
| 60 | 152 | 52 | 133 | 29 | 75 | 36 | 91 | 7.9 | 20 |
| 80 | 203 | 70 | 177 | 39 | 100 | 48 | 122 | 10.5 | 27 |
| 100 | 254 | 87 | 221 | 49 | 125 | 60 | 153 | 13.1 | 33 |
| 150 | 381 | 131 | 332 | 74 | 187 | 91 | 230 | 19.6 | 50 |
| 200 | 508 | 174 | 443 | 98 | 249 | 121 | 308 | 26.2 | 66 |
| 250 | 635 | 218 | 553 | 123 | 311 | 152 | 386 | 32.7 | 83 |
| 300 | 762 | 261 | 664 | 147 | 374 | 182 | 463 | 39.3 | 100 |

The above numbers are approximate, and may be slightly different from the actual measurements

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.

Presentation Products Division Phone: 888.307.0349 Email: ppdinfo@mdea.com www.mitsubishi-presentations.com



PRESENTATION PRODUCTS

MITSUBISHI ELECTRIC SALES CANADA, INC.

Information Technologies Group Phone: 905.475.7728 www.mitsubishielectric.ca