The Best Value Short Throw Projector Enables Presentation for Small-Medium Rooms



Overview

ViewSonic's new short throw projection model, the PJD5483s, requires merely 0.76 meter for a 72" image projection. It is perfect for use in limited room space. Boasting BrilliantColor™ technology, 3,000 lumens, and a 15,000:1 contrast ratio, the PJD5483s delivers clear, crisp images and vividly accurate colors to best meet the environment requirements of any presentation. This budget-friendly option features DynamicEco Technology allowing it to automatically adjust lamp brightness, extending the lamp life to 7000 hours. The HDMI connection and multiple video input options in the PJD5483s provide flexible connections to a variety of media devices while the integrated speaker saves the effort of connecting external speakers. The Off-to-Go mode, vertical keystone correction, and 144Hz/3D ready functions allow the operation of this projector series to be simple and efficient, making presentations easier than ever.

Features



Short Throw projection

The PJD5483s adopts a cutting-edge short throw lens that requires 0.76 meters for a 72" image projection. The short throw facilitates a more comfortable presentation experience by eliminating distractions from shadows on the screen, as well as eyestrain and glare from the projector's blinding light.

For more product information, visit us at www.viewsoniceurope.com









XGA resolution, 3,000 lumens, and 15,000:1 contrast ratio

The PJD5483s supports 3,000 lumens brightness and 15,000:1 contrast, ensuring image quality will remain crystal clear and vivid even in bright environments.



BrilliantColor™ technology HDMI 1.4 Input




ViewSonic integrates BrilliantColor™ technology into the PJD5483s to construct digital colors that deliver stunning, vibrant images. The advanced 6-segment color wheel specifically enriches the performance of yellow and further augments overall color reproduction to ensure a defined picture quality. Along with HDMI 1.4, the PJD5483s offers connectivity to a versatile range of HD devices, projecting superior images for a large screen experience.



7000-hours high performance long-life light bulbs

The The energy-saving mode on the PJD5483s automatically adjusts the brightness to optimize performance, extending the lamp life to up to 7,000 hours and saving maintenance costs.



DynamicEco ViewSonic's p adjust lamp b up to 70% po

DynamicEco Technology makes excellent energy conservation

ViewSonic's proprietary DynamicEco technology will automatically adjust lamp brightness to prolong projector lamp life and conserve up to 70% power consumption.

For more product information, visit us at www.viewsoniceurope.com





3D projection ready

The 3D DLP® Link technology brings presentations to life by supporting an image update frequency of 144Hz, allowing the projected images to be displayed with a 3D stereoscopic effect.



Off-to-Go Mode saves your time

The efficient Off-to-Go mode on the PJD5483s enables quick shutdown and turn-on, saving every second of your valuable time. The PJD5483s takes only 3 seconds to turn on and shuts down instantly, requiring zero power consumption to cool down the projector.




Easy vertical keystone correction

When projectors are tilted, the projection image aspect ratio may display rectangular images in a trapezoidal shape, resulting in image distortion. The PJD5483s offers +40°/-40° keystone correction to fix image distortion issues easily and quickly.



Ultra-low power consumption in standby mode

The PJD5483s consumes only 0.5W in standby mode, saving ownership cost and practicing environmental friendliness.

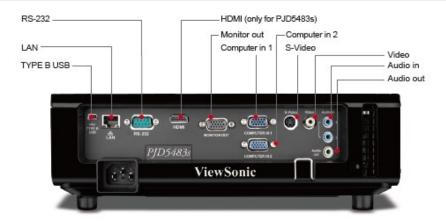

Technical Specifications

COMPATIBILITY	PC	1024 x 768 @ 60Hz (Native)
	Mac®	1024 x 768 @ 75Hz
DIMENSIONS		004 000 05444 5 110
	Physical (mm)	$294 \times 202 \times 95(W \times D \times H)$

For more product information, visit us at www.viewsoniceurope.com



	Physical (in)	11.57" x 7.95" x 3.74"(W × D × H)
REGULATIONS		ROHS, REACH, SVHC, WEEE, ErP
PACKAGE CONTENTS		1.8 Meter Power Cord *1, 1.8 Meter VGA Cable *1, Remote Control *1 with AAA Battery, Quick Start Guide (one sheet version) *1, ViewSonic CD Wizard (with user manual) *1, Warranty Card & Sticker (only for China) *1
AUDIO	Speaker	2W *2
INPUT SIGNAL	Frequency	Horizontal: 31 ~ 100 kHz Vertical: 48 ~ 120 Hz
	Computer and Video	NTSC M (3.58 MHz), 4.43MHz PAL (B, D, G, H, I, M, N, 60) SECAM (B, D, G, K, K1, L) 480i and 576i 480p and 576p 720p,1080i, 1080p
CONNECTOR	Audio Out S-Video Input	3.5mm mini- Mono Jack *1 Mini-Din 4 pin *1
	HDMI (input) RS-232	1.4 *1 DB-9 *1
	Audio Input	3.5mm mini- Mono Jack *2
	USB	Mini Type B
	Component-In	Share with RGB *2
	Composite Input	RCA *1
	RGB Input	DB-15 *2
	RGB Output	DB-15 *1
POWER	Voltage	100V ~ 240Vac 50 / 60Hz
	Consumption	315W (Max.)
DISPLAY	Contrast Ratio	15,000:1
	Display size	40" ~300" (diagonal)
	Aspect Ratio	4:3
	Throw Distance	0.5m ~ 4m
	Throw Ratio	0.62
	Brightness	3,000 lm
	Color Wheel	6-Seg RGBCYW
	Keystone Correction	+40 ~ -40



Lamp life (Normal 3,500 /5,000 /7,000 hours

/ Eco / Dynamic

Eco)

Resolution 1024 (H) x 768 (V)

Lamp OSRAM Lens NA

LANGUAGE English, France, Spanish, Thai, Korea, Germany, Italian, Russian,

Swedish, Dutch, Polish, Zech, T-Chinese, S-Chinese, Japanese,

Turkish, Portuguese, Finnish, Indonesian, India, Arabic

WEIGHT Net 4.71lbs (2.14kgs)

OPERATING

CONDITIONS Humidity 10 ~ 90% (non- condensation)

Temperature $32^{\circ} \sim 104^{\circ} \text{ F } (0^{\circ} \sim 40^{\circ} \text{ C})$

Altitude $0 \sim 6,000$ ft.

CHIPSET TI DMD 0.55

ViewSonic® Limited Warranty



ViewSonic provides customers with the security of a manufacturers warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.