

KRAMER



USER MANUAL

MODEL:

VS-211UHD
UHD Auto Switcher



VS-211UHD Quick Start Guide

This guide helps you install and use your VS-211UHD for the first time.


Go to www.kramerav.com/downloads/VS-211UHD to download the latest user manual and check if firmware upgrades are available.

Scan for full manual


Step 1: Check what's in the box

- VS-211UHD UHD 2x1 Auto Switcher
- 4 Rubber feet
- 1 Bracket set
- 1 Power supply (5V DC)
- 1 Quick start guide
- IR remote control transmitter with batteries

Step 2: Get to know your VS-211UHD

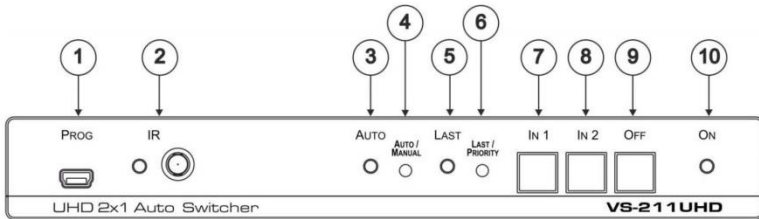

#	Feature	Function
1	PROG USB Connector	Connects to a PC to upgrade the firmware
2	IR Sensor and LED	Receives and indicates IR signals from a remote control (flashes during valid IR activity)
3	AUTO LED	Lights when auto switching is active, off for manual switching
4	AUTO/MANUAL Button	Press to select between auto-switching or manual switching mode
5	LAST LED	Lights when last connected input is active, off for highest priority
6	LAST/PRIORITY Button	When in the AUTO mode, the switch selects switching to a priority or last connected device
7	IN 1 Button	Press to route HDMI source 1 to the output (dim when active video connected, lit when selected)
8	IN 2 Button	Press to route HDMI source 2 to the output (dim when active video connected, lit when selected)
9	OFF Button	Press to mute the video output (lit when muted)
10	ON LED	Lights when power is connected to the unit


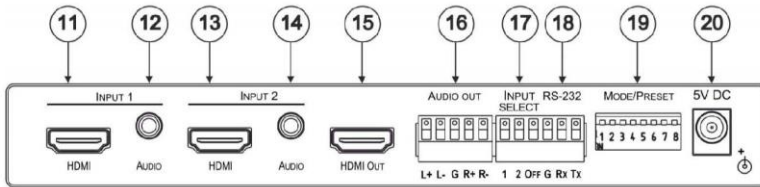


#	Feature	Function
11	INPUT 1 HDMI Connector	Connects to HDMI source 1
12	INPUT 1 AUDIO 3.5mm Connector	Connects to unbalanced stereo audio source 1
13	INPUT 2 HDMI Connector	Connects to HDMI source 2
14	INPUT 2 AUDIO 3.5mm Connector	Connects to unbalanced stereo audio source 2
15	HDMI OUT Connector	Connects to an HDMI acceptor
16	AUDIO OUT Terminal Block	Connects to a balanced stereo audio acceptor
17	INPUT SELECT Contact Closure Terminal Block	Connects to external contact closure switches
18	RS-232 Terminal Block	Connects to an RS-232 source
19	MODE/PRESET DIP-Switches	Use to set EDID, audio and delay settings (see Step 6)
20	5V DC Connector	Connects to a power supply for the unit

Step 3: Install the VS-211UHD


Attach the rubber feet and place on a table or mount the **VS-211UHD** in a rack (using an optional **RK-T2B** rack mount).

A Kramer **TOOLS™** can also be mounted on a desk top, wall or similar area. Fasten a bracket on each side of the **TOOLS** using the two M3x8 screws (supplied). Use the flat-head screws (supplied) to fix the **TOOLS** to the mounting surface or enable it to slide in place.



Step 4: Connect the inputs and outputs

Always switch OFF the power on each device before connecting it to your VS-211UHD. For best results, we recommend that you always use Kramer high-performance cables to connect AV equipment to the VS-211UHD.

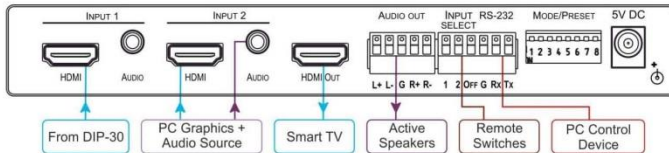

Step 5: Connect the power

Connect the 5V DC power adapter to the VS-211UHD and plug it into the mains electricity.

Step 6: Set the DIP-switches

Set the DIP-switches as shown in the following table:

MODE/PRESET



DIP	Function	Off (Up)	On (Down)
1	Audio EDID	Pass audio EDID of sink	Limit to 2-CH LPCM
2	Color EDID	Pass deep color parameter of sink	Limit to RGB 8bpp
3	Lock EDID	Pass EDID of sink	Lock current display EDID and the current settings of DIPs 1 and 2 (The settings of DIPs 1 and 2 cannot be changed when DIP 3 is locked) This state also allows copying the default EDID or an EDID file to the inputs when using EDID Designer. (If using EDID Designer, refresh after copying)
4	HDCP	Enable HDCP support When On, if the output supports HDCP, the input declares HDCP support. It then handles HDCP on the output and input actively. If the output does not support HDCP then the input does not support HDCP.	Disable HDCP support When Off, the device does not support HDCP on its input, even if HDCP is detected on the output.
5	Auto Embedding Port 1	Embed analog audio only if the video is DVI	Always embed analog audio input
6	Auto Embedding Port 2		
7	Audio From	Source	ARC
8	Output Off Delay Settings	15sec default (configurable)	15min

Step 7: Operation

Manual Switch Mode

In Manual switch mode, the **VS-211UHD** does not automatically switch to another channel even if an input signal is not detected on the manual input.

To select Manual switch mode:

- Press the AUTO button to turn the Auto LED off.

To select an input in Manual switch mode:

- Press the IN1 or IN2 button to route this input to the HDMI output. The keys respond as follows:

Input LED bright: input selected

Input LED dim: input active and not selected

Input LED off: input is not active and not selected

Auto Switch Mode

In Auto switch mode, the **VS-211UHD** automatically switches one of two HDMI inputs to a predefined or the last connected input whenever the currently active video signal is interrupted or whenever a higher-priority video signal is detected.

To select Auto switch mode:

1. Press the AUTO/MANUAL button to turn the Auto LED on.
2. Press the LAST/PRIORITY button to select an auto switch mode:

Last connected (LAST LED on) – The device always switches to a newly detected active video source. When the device is powered on, the output switches to the highest priority input

Priority (LAST LED off) – The device always switches to the highest priority input source. The default priority is Input 1 then Input 2.

Manual Override Mode

Auto switch mode can be overridden by a manual command, such as pressing an input button or sending a control command. In such a case, the system switches to the manually selected source. If this manually selected source is not active, the system waits a set amount of time (10 seconds, default) and then switches back to auto mode. Manual override selection is not stored in non-volatile memory.

Step 8: Technical specifications

INPUTS:	2 HDMI connectors, 2 unbalanced stereo audio on 3.5mm mini jack
ANALOG AUDIO UNBALANCED INPUT:	Nominal level: 316mVRMS, maximum level: 1VRMS, impedance: 10kΩ
OUTPUTS:	1 HDMI connector, 1 balanced stereo audio on 5-pin terminal block
ANALOG AUDIO BALANCED OUTPUT:	Nominal level: 316mVRMS, maximum level: 1VRMS, impedance: 150Ω
PORTS:	1 RS-232 on a 3-pin terminal block, 1 mini USB for programming
HDMI SUPPORT:	HDMI 1.4, Deep Color, 3D, ARC, up to 7.1 uncompressed audio channels
SUPPORTED RESOLUTIONS:	Up to UXGA, 4K x 2K, 4K @60 4:2:0
CONTROLS:	Front panel buttons, contact closure, IR, RS-232 Protocol 3000
SOFTWARE SUPPORT:	Protocol 3000, EDID Designer, K-Upload
POWER CONSUMPTION:	5V DC, 520mA
OPERATING TEMPERATURE:	0° to +40°C (32° to 104°F)
STORAGE TEMPERATURE:	-40° to +70°C (-40° to 158°F)
HUMIDITY:	10% to 90%, RHL non-condensing
DIMENSIONS:	18.8cm x 11.5cm x 2.5cm (7.4" x 4.5" x 1.0") W, D, H
WEIGHT:	0.425kg (0.9lbs) approx.
SHIPPING DIMENSIONS:	35.1cm x 16.5cm x 5.2cm (13.8" x 6.5" x 2.0") W, D, H
SHIPPING WEIGHT:	0.56kg (1.2lbs) approx.
INCLUDED ACCESSORIES:	Power adapter, IR remote control
OPTIONS:	RK-T2B 19" rack adapter

Contents

1	Introduction	1
2	Getting Started	2
2.1	Achieving the Best Performance	2
2.2	Safety Instructions	2
2.3	Recycling Kramer Products	3
3	Overview	4
3.1	Defining the VS-211UHD UHD Auto Switcher	5
4	Connecting the VS-211UHD	7
4.1	Connecting a Serial Controller to the VS-211UHD via RS-232	8
4.2	Setting the DIP-Switches	9
4.3	Upgrading the Firmware	9
5	Operating the VS-211UHD	10
5.1	Switching – Manual and Auto	10
5.2	Setting the Switching Speed	11
5.3	Muting the Output	11
5.4	Copying the EDID	12
5.5	Setting the 5V Output Time Delay	12
5.6	Setting HDCP Capability	12
5.7	Setting Audio Output	13
5.8	Using the Remote Control	14
5.9	Step-In Support	14
6	Controlling the VS-211UHD	15
6.1	Using the Front Panel Buttons	15
6.2	Switching via the Terminal Block Connector	16
6.3	Using the RC-IR3 Remote Control Transmitter	16
6.4	Connecting to the VS-211UHD via RS-232	17
6.5	Performing a Factory Reset	17
7	Technical Specifications	18
8	Default Settings	19
8.1	Default Communication Settings	19
8.2	First Power On Default Settings	19
8.3	Default EDID	20
9	Protocol 3000	22
9.1	Understanding Protocol 3000	23
9.2	Kramer Protocol 3000 Syntax	25
9.3	Protocol 3000 Commands	26

Figures

Figure 1:	VS-211UHD 2x1 Auto Switcher	5
Figure 2:	Connecting the VS-211UHD UHD Auto Switcher	8
Figure 3:	Connecting the Contact Closure Remote Control Pins	16
Figure 4:	RS-232 Pinout	17

1 Introduction

Welcome to Kramer Electronics! Since 1981, Kramer Electronics has been providing a world of unique, creative, and affordable solutions to the vast range of problems that confront video, audio, presentation, and broadcasting professionals on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better!

Our 1,000-plus different models now appear in 14 groups that are clearly defined by function: GROUP 1: Distribution Amplifiers; GROUP 2: Switchers and Routers; GROUP 3: Control Systems; GROUP 4: Format/Standards Converters; GROUP 5: Range Extenders and Repeaters; GROUP 6: Specialty AV Products; GROUP 7: Scan Converters and Scalers; GROUP 8: Cables and Connectors; GROUP 9: Room Connectivity; GROUP 10: Accessories and Rack Adapters; GROUP 11: Sierra Video Products; GROUP 12: Digital Signage; GROUP 13: Audio; and GROUP 14: Collaboration.

Congratulations on purchasing your Kramer **VS-211UHD** UHD Auto Switcher. This product, which incorporates HDMI™ technology, is ideal for:

- Education, entertainment, corporate and any other AV installation that requires selecting and switching between two HDMI sources automatically.

2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment.
- Review the contents of this user manual.



Go to www.kramerav.com/downloads/VS-211UHD to check for up-to-date user manuals, application programs, and to check if firmware upgrades are available (where appropriate).

2.1 Achieving the Best Performance

To achieve the best performance:

- For optimum range and performance, use the recommended Kramer cables available at www.kramerav.com/product/VS-211UHD.
- Do not secure the cables in tight bundles or roll the slack into tight coils.
- Avoid interference from neighbouring electrical appliances that may adversely influence signal quality.
- Position your **VS-211UHD** away from moisture, excessive sunlight and dust.



This equipment is to be used only inside a building. It may only be connected to other equipment that is installed inside a building.

2.2 Safety Instructions



Caution: There are no operator serviceable parts inside the unit.

Warning: Use only the Kramer Electronics power supply that is provided with the unit.

Warning: Disconnect the power and unplug the unit from the wall before installing.

2.3 Recycling Kramer Products

The Waste Electrical and Electronic Equipment (WEEE) Directive 2002/96/EC aims to reduce the amount of WEEE sent for disposal to landfill or incineration by requiring it to be collected and recycled. To comply with the WEEE Directive, Kramer Electronics has made arrangements with the European Advanced Recycling Network (EARN) and will cover any costs of treatment, recycling and recovery of waste Kramer Electronics branded equipment on arrival at the EARN facility. For details of Kramer's recycling arrangements in your particular country go to our recycling pages at www.kramerav.com/support/recycling/.

3 Overview

The **VS-211UHD** is an automatic switcher for 4K@60Hz (4:2:0) HDMI and analog audio signals. The unit automatically switches one of two HDMI inputs to a predefined or the last connected input whenever the currently active video signal is interrupted or whenever a higher-priority video signal is detected. It also supports Kramer's Step-in over HDMI technology.

The unit can embed analog audio to an HDMI signal and can extract the audio from either an input HDMI signal or an output Audio Return Channel (ARC) HDMI signal. The **VS-211UHD** can output an analog audio source on the HDMI output even when an HDMI source is not connected and enters sleep mode when no input is detected.

The **VS-211UHD** features:

- Maximum data rate 8.91Gbps (2.97Gbps per graphic channel)
- Resolution support for up to 4K@60Hz (4:2:0) UHD
- Support of Kramer Step-In over HDMI technology
- HDTV compatible
- Active switching – selectable manual or fast auto switching according to last connected or preset priority
- HDMI, HDCP and DVI compliant
- HDMI 1.4 support for Deep Color, 3D, ARC, up to 7.1 uncompressed audio channels
- HDMI 1 input support for CEC and ARC
- HDMI ARC de-embedding from output to balanced stereo audio line out, uncompressed
- DVI 1.0 supported
- Automatic video input detection and selection
- Auto-power off when no HDMI input is detected (selectable timeout)
- HDCP handling

- EDID configuration options
- Default EDID
- Contact closure for remote manual switching override
- Audio embedding/de-embedding
- Analog audio input per port
- Firmware upgrade over RS-232, mini-USB
- Support for Protocol 3000, EDID Designer, K-Upload via RS-232
- Varied control options – front panel buttons, contact closure, IR, RS-232 Protocol 3000

3.1 Defining the VS-211UHD UHD Auto Switcher

This section defines the **VS-211UHD**.

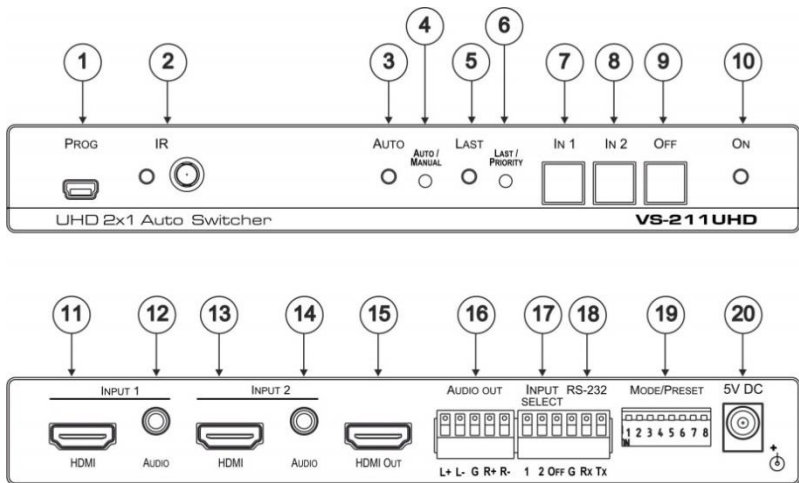


Figure 1: VS-211UHD 2x1 Auto Switcher

#	Feature	Function
1	<i>PROGRAM</i> USB Connector	Connects to a PC to upgrade the firmware
2	<i>IR</i> Sensor and LED	Receives and indicates IR signals from a remote control (flashes during valid IR activity)
3	<i>AUTO</i> LED	Lights when auto switching is active, off for manual switching
4	<i>AUTO/MANUAL</i> Button	Press to select between auto-switching or manual switching mode
5	<i>LAST</i> LED	Lights when last connected input is active, off for highest priority
6	<i>LAST/PRIORITY</i> Button	When in the <i>AUTO</i> mode, switch toggles to select switching to a priority or last connected device
7	<i>IN 1</i> Button	Press to route HDMI source 1 to the output (dim when active video connected, lit when selected)
8	<i>IN 2</i> Button	Press to route HDMI source 2 to the output (dim when active video connected, lit when selected)
9	<i>OFF</i> Button	Press to mute the video output (lit when muted)
10	<i>ON</i> LED	Lights when power is connected to the unit
11	<i>INPUT 1</i> HDMI Connector	Connects to HDMI source 1
12	<i>INPUT 1</i> AUDIO 3.5mm Connector	Connects to unbalanced stereo audio source 1
13	<i>INPUT 2</i> HDMI Connector	Connects to HDMI source 2
14	<i>INPUT 2</i> AUDIO 3.5mm Connector	Connects to unbalanced stereo audio source 2
15	<i>HDMI OUT</i> Connector	Connects to an HDMI acceptor
16	<i>AUDIO OUT Terminal Block</i>	Connects to a balanced stereo audio acceptor
17	<i>INPUT SELECT</i> Contact Closure Terminal Block	Connects to external contact closure input switches (see Section 6)
18	<i>RS-232</i> Terminal Block	Connects to a local RS-232 source (see Section 4.1)
19	<i>MODE/PRESET</i> DIP-Switches	Use to set EDID, audio and delay settings (see Section 4.2)
20	<i>5V DC</i> Connector	Connects to a power supply for the unit

4 Connecting the VS-211UHD



Always switch off the power to each device before connecting it to your **VS-211UHD**. After connecting your **VS-211UHD**, connect its power and then switch on the power to each device.



You do not have to connect all the inputs and outputs, connect only those that are required.

To connect the **VS-211UHD**, as illustrated in the example in [Figure 2](#), do the following:

1. Connect HDMI source 1 (for example, a Kramer **DIP-31**) to the INPUT1 HDMI connector.
2. Connect an unbalanced stereo audio source 1 to the INPUT 1 AUDIO 3.5mm mini jack (not shown in this example).
3. Connect HDMI source 2 (for example, a laptop) to the INPUT 2 HDMI connector.
4. Connect an unbalanced stereo audio source 2 to the INPUT 2 AUDIO 3.5mm mini jack (audio from the PC).
5. Connect the HDMI OUT connector to an HDMI acceptor (for example, a smart TV).
6. Connect the AUDIO OUT terminal block to a balanced stereo audio acceptor (for example, active speakers).
7. If required for remote switching, connect the INPUT SELECT terminal block to contact closure switches.
8. Connect the RS-232 terminal block to a controller (for example, a PC).
9. Connect a power cord to the device and plug it into the mains electricity (not shown in [Figure 2](#)).

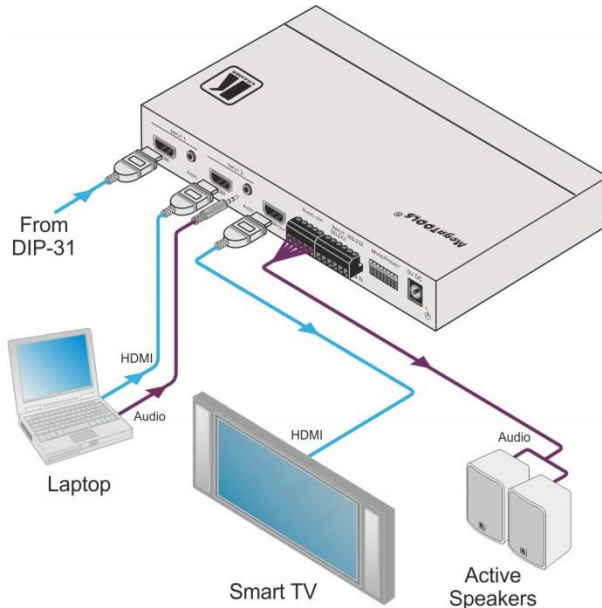


Figure 2: Connecting the VS-211UHD UHD Auto Switcher

4.1 Connecting a Serial Controller to the VS-211UHD via RS-232

The **VS-211UHD** operates at two baud rates – 9600 (default) and 115,200 (see all communication parameters in [Section 8](#)).

To connect a serial controller to the VS-211UHD:

- From the RS-232 9-pin D-sub serial port on the serial controller connect:
 - Pin 2 to the TX pin on the **VS-211UHD** RS-232 terminal block
 - Pin 3 to the RX pin on the **VS-211UHD** RS-232 terminal block
 - Pin 5 to the GND pin on the **VS-211UHD** RS-232 terminal block

4.2 Setting the DIP-Switches

The Setup DIP-switches dictate the behavior of the **VS-211UHD**.

All DIP-switches are off by default.

DIP	Function	Off (Up)	On (Down)
1	Audio EDID	Pass audio EDID of sink	Limit to 2-CH LPCM
2	Color EDID	Pass deep color parameter of sink	Limit to RGB 8bpp
3	Lock EDID	Pass EDID of sink	Lock current display EDID and the current settings of DIPs 1 and 2 (The settings of DIPs 1 and 2 cannot be changed when DIP 3 is locked) This state also allows copying the default EDID or an EDID file to the inputs when using EDID Designer. (If using EDID Designer, refresh after copying)
4	HDCP	Enable HDCP support When On, if the output supports HDCP, the input declares HDCP support. It then handles HDCP on the output and input actively. If the output does not support HDCP then the input does not support HDCP.	Disable HDCP support When Off, the device does not support HDCP on its input, even if HDCP is detected on the output.
5	Auto Embedding Port 1	If embedded audio is present (HDMI), embedded audio is passed	Always embed analog audio input
6	Auto Embedding Port 2	If no embedded audio is present (DVI), the analog audio input is used	
7	Audio From	Source	ARC
8	Output Off Delay Settings	15sec default (configurable)	15min

4.3 Upgrading the Firmware

The **VS-211UHD** can be upgraded via USB or RS-232.

For instructions on upgrading the firmware, see "*K-Upload Software User Guide*" (<http://k.kramerav.com/support/download.asp?f=39700>).

5 Operating the VS-211UHD

This section describes how to operate the **VS-211UHD**.

5.1 Switching – Manual and Auto

Switching can be performed automatically or manually using the front panel buttons, remote control, or control commands. This section describes using the buttons to select Auto or Manual switch modes.

The same procedure can also be used for controlling switching via the remote control. For information about switching via control commands, see [Section 9.3.3](#).

5.1.1 Manual Switch Mode

In Manual switch mode, the **VS-211UHD** does not automatically switch to another channel even if an input signal is not detected on the manual input.

To select the Manual switch mode:

1. Press the AUTO button to turn the Auto LED off.
2. Press the IN1 or IN2 button to route this input to the HDMI output.

The keys respond as follows:

- Input LED bright: input selected
- Input LED dim: input active and not selected
- Input LED off: input is not active and not selected

5.1.2 Auto Switch Mode

In Auto switch mode, the **VS-211UHD** automatically switches one of two HDMI inputs to a predefined or the last connected input whenever the currently active video signal is interrupted or whenever a higher-priority video signal is detected.

To select Auto switch mode:

1. Press the Auto/Manual button to turn the Auto LED on.
2. Press the Last/Priority button to select an auto switch mode:
 - Last connected (LAST LED on) – The device always switches to a newly detected active video source. When the device is powered on, the output switches to the highest priority input
 - Priority (LAST LED off) – The device always switches to the highest priority input source. The default priority is Input 1 then Input 2.

5.1.3 Manual Override Mode

Auto switch mode can be overridden by a manual command, such as pressing an input button or sending a control command. In such a case, the system switches to the manually selected source. If this manually selected source is not active, the system waits a set amount of time (10 seconds, default) and then switches back to auto mode. Manual override selection is not stored in non-volatile memory.

5.2 Setting the Switching Speed

The **VS-211UHD** supports setting normal and fast (default) switching speeds.

To set switching speed modes:

1. Disconnect device power.
2. Press and hold one of the following buttons together with the OFF button:
 - IN 1 button – for setting fast switching speed mode.
 - IN 2 button – for setting normal switching speed mode.
3. Power the device on.
The device switching speed is modified.

5.3 Muting the Output

- Press the OFF button to mute the audio and video outputs

5.4 Copying the EDID

The EDID is a data structure transmitted by the display that enables the **VS-211UHD** to recognize the display connected to the output. The **VS-211UHD** acquires and stores the EDID to make reconnection to the display effortless.

When the device is first powered on, it has default EDID loaded. The device automatically reads and saves the first read EDID. Use DIP-switches 1-3 to set EDID functionality (see [Section 4.2](#)).

While copying EDID data, the input port's HPD function changes from Low to High which may affect the channel's auto-switching.



The device automatically recognizes EDID differences between input and output channels based on parts of the EDID data, including manufacturer, serial number, and first block check-sum information. EDID data is not copied when no difference is recognized.

5.5 Setting the 5V Output Time Delay

Use DIP-switch 8 to set the delay time. Off (Up) delays 15 seconds, On (Down) delays 15 minutes. A P3K command can modify the delay time.

When there is no signal clock or 5V input on both inputs for the set delay, the device shuts down the 5V output.

5.6 Setting HDCP Capability

The **VS-211UHD** supports HDCP communication automatically, by default. When HDCP is detected in the input signal, it is enabled in the output signal. You can also disable HDCP support using DIP-switch 4 (see [Section 4.2](#)). Enabling or disabling HDCP support is universal for both inputs.

5.7 Setting Audio Output

The **VS-211UHD** enables customizing the audio output by embedding audio in HDMI, de-embedding HDMI ARC from output to the balanced stereo (uncompressed) audio line out, or routing the HDMI / analog inputs to the balanced stereo audio line out.

Note: Sending compressed audio on ARC causes noise on the analog audio output.

5.7.1 Embedding Audio in HDMI

The **VS-211UHD** can output audio to the HDMI Out port from the original HDMI input or the Analog unbalanced 3.5mm audio input, by embedding it in the HDMI input signal. The **VS-211UHD** enables setting the audio output separately for each input using DIP-switches 5 and 6 (see [Section 4.2](#)).



An Input 1 analog audio signal can only be embedded in the Input 1 HDMI signal.

An Input 2 analog audio signal can only be embedded in the Input 2 HDMI signal.

5.7.2 Outputting Audio from ARC or Device Inputs

The **VS-211UHD** can output audio to the balanced stereo Audio Out terminal block from the following input sources:

- ARC – In this mode, the device does not enable embedding audio in the HDMI signal.
- HDMI inputs / Analog unbalanced 3.5mm audio inputs – In this mode, the balanced stereo Audio Out terminal block and the HDMI Out port both output audio. The Audio Out terminal block mutes the audio when the input audio signal is not LPCM.

Use DIP-switch 7 to set output to ARC / device inputs (see [Section 4.2](#)).

5.8 Using the Remote Control

You can use the **RC-IR3** wireless remote control to control the **VS-211UHD** via the built-in IR receiver on the front panel. For more information, see www.kramerav.com/Product/RC-IR3.

5.9 Step-In Support

The **VS-211UHD** supports programmable step-in functionality when used in conjunction with compatible step-in devices, such as the **SID-X3N** and **DIP-30** (using an HDMI cable that supports HEC, the HDMI Ethernet Channel).

When ARC mode is enabled, Input 1 step-in mode is disabled. If you require step-in mode on Input 1, set the audio output to the device inputs (see [Section 5.7.2](#)).

6 Controlling the VS-211UHD

The **VS-211UHD** can be controlled via the:

- Front panel buttons (see [Section 6.1](#))
- Terminal block connector (see [Section 6.2](#))
- RC-3IR remote control transmitter (see [Section 6.3](#))
- RS-232 port (see [Section 6.4](#))

6.1 Using the Front Panel Buttons

The **VS-211UHD** includes the following front panel buttons:

- Front panel INPUT buttons (see [Section 5.1.1](#))
- The AUTO button, toggling between the auto and the manual mode (see [Section 5.1.2](#))
- The LAST button, toggling between set priorities or last connected modes (see [Section 5.1.2](#))
- The OFF button to disconnect the output from the inputs

The front panel button LEDs behave as follows:

- Input LED bright: input selected
 - Input LED dim: input active and not selected
 - Input LED off: input is not active and not selected
- If a non-active signal is selected, the display appears black.

6.2 Switching via the Terminal Block Connector

The INPUT SELECT terminal block connector includes three input pins and a G pin for selecting an input:

- 1 – Switch to Input 1
- 2 – Switch to Input 2
- OFF – Mute the HDMI output

The contact closure remote control pins operate in a similar way to the input buttons (see [Section 5.1.1](#)). Using the contact closure remote control (also known as push-to-make momentary contact) you can select any of the inputs. To do so, momentarily connect the required input pin (1 or 2) to the G (Ground) pin of the INPUT SELECT terminal block connector, as [Figure 3](#) illustrates.

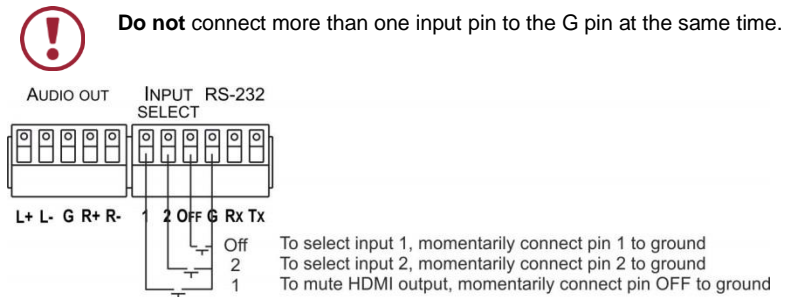


Figure 3: Connecting the Contact Closure Remote Control Pins

6.3 Using the RC-IR3 Remote Control Transmitter

You can control the **VS-211UHD** via the Kramer **RC-IR3** Remote Control Transmitter.

To switch an input to the output:

- Press key 1 to switch INPUT 1 to the output
- Press key 2 to switch INPUT 2 to the output

To mute audio and video on the output:

- Press the OFF key to disconnect the output

The IR LED behaves as follows:

- When the device is powered on, the IR LED turns on for a short time and then turns off
- Before finding the sink, the LED is off
- After finding the sink, the LED is on
- When receiving information, the LED flashes

6.4 Connecting to the VS-211UHD via RS-232

Connect the RS-232 Terminal block connector on the product to the RS-232 9-pin D-sub port on your PC/controlled device to control the **VS-211UHD**, as shown in [Figure 4](#):

[Figure 4](#):

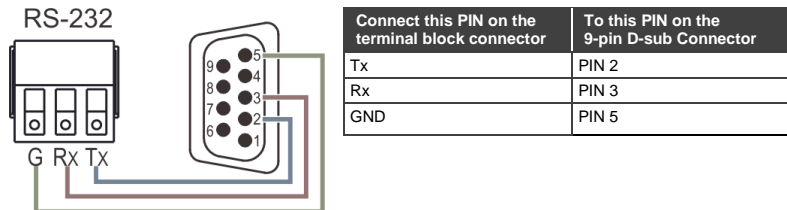


Figure 4: RS-232 Pinout

6.5 Performing a Factory Reset

Factory reset returns all the parameters of the device to their factory default settings.

To perform a factory reset:

1. Disconnect device power.
2. Press and hold IN 1 while reconnecting device power.
All indicators flash while resetting to the factory default parameters.
3. When all the lights turn off the reset is complete.

7 Technical Specifications

INPUTS:	2 HDMI connectors, 2 unbalanced stereo audio on 3.5mm mini jack
ANALOG AUDIO UNBALANCED INPUT:	Nominal level: 316mVRMS Maximum level: 1VRMS Impedance: 10kΩ
OUTPUTS:	1 HDMI connector, 1 balanced stereo audio on 5-pin terminal block
ANALOG AUDIO BALANCED OUTPUT:	Nominal level: 316mVRMS Maximum level: 1VRMS Impedance: 150Ω
PORTS:	1 RS-232 on a 3-pin terminal block, 1 mini USB for programming
COMPLIANCE WITH HDMI STANDARD:	HDMI 1.4, Deep Color, 3D, ARC, up to 7.1 uncompressed audio channels, CEC
SUPPORTED RESOLUTIONS:	Up to UXGA, 4K x 2K, 4K @60 4:2:0
CONTROLS:	Front panel buttons, contact closure, IR, RS-232 Protocol 3000
SOFTWARE SUPPORT:	Protocol 3000, EDID Designer, K-Upload
POWER CONSUMPTION:	5V DC, 520mA
OPERATING TEMPERATURE:	0° to +40°C (32° to 104°F)
STORAGE TEMPERATURE:	-40° to +70°C (-40° to 158°F)
HUMIDITY:	10% to 90%, RHL non-condensing
DIMENSIONS:	18.8cm x 11.5cm x 2.5cm (7.4" x 4.5" x 1.0") W, D, H
WEIGHT:	0.425kg (0.9lbs) approx.
SHIPPING DIMENSIONS:	35.1cm x 16.5cm x 5.2cm (13.8" x 6.5" x 2.0") W, D, H
SHIPPING WEIGHT:	0.56kg (1.2lbs) approx.
INCLUDED ACCESSORIES:	Power adapter, IR remote control
OPTIONS:	RK-T2B 19" rack adapter
Specifications are subject to change without notice at www.kramerav.com	

8 Default Settings

VS-211UHD has the following default settings for communication, first power on and EDID.

8.1 Default Communication Settings

RS-232	
Protocol 3000 (Default)	
Baud Rate	9600 (default),115200
Data Bits	8
Stop Bits	1
Parity	None
Command Format	ASCII

8.2 First Power On Default Settings

The first power on of the device automatically loads the default EDID and all default settings as follows:

Parameter	Value
Out HDCP mode	Follow
Communication format	KMR3000(KMR device)
Current input source port	Input port 1
Manual/Auto switch mode	Auto mode
Pr/Lc switch mode	Priority mode
ARC/ HDMI IN Audio Out	HDMI audio out
Input port HDCP	All ON
Kramer 3000'SN	xxxx xxxx xxxx xx
Kramer 3000' MODEL NAME	V, 'S', '-', '2', '1', '1', 'U', 'H', 'D'
EDID	default
USB for Virtual Com	virtual Com (VCOM)
Switch speed	Fast switch mode

8.3 Default EDID

Monitor

Model name..... VS-211UHD
Manufacturer..... KMR
Plug and Play ID..... KMR03ED
Serial number..... 295-883450100
Manufacture date..... 2015, ISO week 20

EDID revision..... 1.3
Input signal type..... Digital
Color bit depth..... Undefined
Display type..... Monochrome/grayscale
Screen size..... 520 x 320 mm (24.0 in)
Power management..... Standby, Suspend, Active off/sleep
Extension blocs..... 1 (CEA-EXT)

DDC/CI..... n/a

Color characteristics

Default color space..... Non-sRGB
Display gamma..... 2.20
Red chromaticity..... Rx 0.674 - Ry 0.319
Green chromaticity..... Gx 0.188 - Gy 0.706
Blue chromaticity..... Bx 0.148 - By 0.064
White point (default)... Wx 0.313 - Wy 0.329
Additional descriptors... None

Timing characteristics

Horizontal scan range.... 30-83kHz
Vertical scan range..... 56-76Hz
Video bandwidth..... 170MHz
CVT standard..... Not supported
GTF standard..... Not supported
Additional descriptors... None
Preferred timing..... Yes
Native/preferred timing.. 1280x720p at 60Hz (16:10)
Modeline..... "1280x720" 74.250 1280 1390 1430 1650 720 725 730 750 +hsync +vsync


Standard timings supported

720 x 400p at 70Hz - IBM VGA
720 x 400p at 88Hz - IBM XGA2
640 x 480p at 60Hz - IBM VGA
640 x 480p at 67Hz - Apple Mac II
640 x 480p at 72Hz - VESA
640 x 480p at 75Hz - VESA
800 x 600p at 56Hz - VESA
800 x 600p at 60Hz - VESA
800 x 600p at 72Hz - VESA
800 x 600p at 75Hz - VESA
832 x 624p at 75Hz - Apple Mac II
1024 x 768i at 87Hz - IBM
1024 x 768p at 60Hz - VESA
1024 x 768p at 70Hz - VESA
1024 x 768p at 75Hz - VESA
1280 x 1024p at 75Hz - VESA
1152 x 870p at 75Hz - Apple Mac II
1280 x 1024p at 75Hz - VESA STD
1280 x 1024p at 85Hz - VESA STD
1600 x 1200p at 60Hz - VESA STD
1024 x 768p at 85Hz - VESA STD
800 x 600p at 85Hz - VESA STD
640 x 480p at 85Hz - VESA STD
1152 x 864p at 70Hz - VESA STD
1280 x 960p at 60Hz - VESA STD

9 Protocol 3000

The **VS-211UHD** can be operated using the Kramer Protocol 3000 serial commands. The command framing varies according to how you interface with the **VS-211UHD**. For example, a basic video input switching command that routes a layer 1 video signal to HDMI out 1 from HDMI input 2 (`ROUTE 1, 1, 2`), is entered as follows:

- Terminal communication software, such as Hercules:

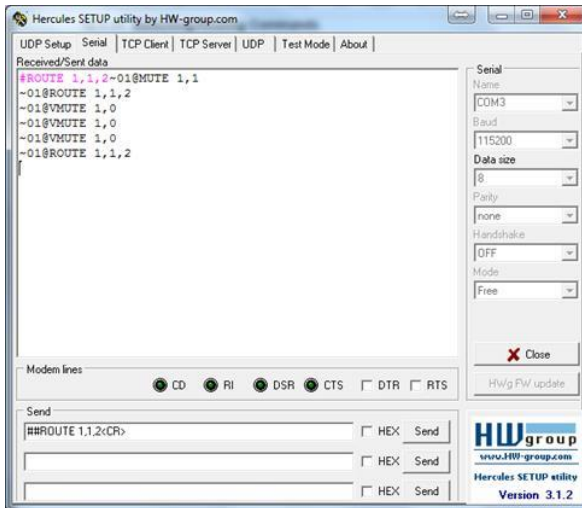

The framing of the command varies according to the terminal communication software.

- K-Touch Builder (Kramer software):

'Device Code (17)' PROPERTIES	
name	Device Code (17)
data	#ROUTE 1,1,2x0D

- K-Config (Kramer configuration software):

```
"#ROUTE 1,1,2",0x0D
```

Set

Clear



All the examples provided in this section are based on using the K-Config software.

You can enter commands directly using terminal communication software (e.g., Hercules) by connecting a PC to the serial or Ethernet port on the **VS-211UHD**. To enter `CR` press the Enter key (`LF` is also sent but is ignored by the command parser).

Commands sent from various non-Kramer controllers (e.g., Crestron) may require special coding for some characters (such as, `/x##`). For more information, refer to your controller's documentation.

For more information about:

- Using Protocol 3000 commands, see [Section 9.1](#)
- General syntax used for Protocol 3000 commands, see [Section 9.2](#)
- Protocol 3000 commands available for the **VS-211UHD**, see [Section 9.3](#)

9.1 Understanding Protocol 3000

Protocol 3000 commands are structured according to the following:

- **Command** – A sequence of ASCII letters (A-Z, a-z and -). A command and its parameters must be separated by at least one space.
- **Parameters** – A sequence of alphanumeric ASCII characters (0-9, A-Z, a-z and some special characters for specific commands). Parameters are separated by commas.
- **Message string** – Every command entered as part of a message string begins with a message starting character and ends with a message closing character.



A string can contain more than one command. Commands are separated by a pipe (|) character.

The maximum string length is 64 characters.

- **Message starting character:**
 - # – For host command/query
 - ~ – For device response
- **Device address** – K-NET Device ID followed by @ (optional, K-NET only)
- **Query sign** – ? follows some commands to define a query request
- **Message closing character:**
 - CR – Carriage return for host messages (ASCII 13)
 - CR LF – Carriage return for device messages (ASCII 13) and line-feed (ASCII 10)
- **Command chain separator character** – Multiple commands can be chained in the same string. Each command is delimited by a pipe character (|). When chaining commands, enter the message starting character and the message closing character only at the beginning and end of the string.



Spaces between parameters or command terms are ignored. Commands in the string do not execute until the closing character is entered. A separate response is sent for every command in the chain.

9.2 Kramer Protocol 3000 Syntax

The Kramer Protocol 3000 syntax uses the following delimiters:

- **CR** = Carriage return (ASCII 13 = 0x0D)
- **LF** = Line feed (ASCII 10 = 0x0A)
- **SP** = Space (ASCII 32 = 0x20)

Some commands have short name syntax in addition to long name syntax to enable faster typing. The response is always in long syntax.

The Protocol 3000 syntax is in the following format:

- Host Message Format:

Start	Address (optional)	Body	Delimiter
#	<i>Device_id@</i>	Message	CR

- **Simple Command** – Command string with only one command without addressing:

Start	Body	Delimiter
#	Command SP <i>Parameter_1,Parameter_2,...</i>	CR

- **Command String** – Formal syntax with command concatenation and addressing:

Start	Address	Body	Delimiter
#	<i>Device_id@</i>	Command_1 <i>Parameter1_1,Parameter1_2,...</i> Command_2 <i>Parameter2_1,Parameter2_2,...</i> Command_3 <i>Parameter3_1,Parameter3_2,...</i> ...	CR

- Device Message Format:

Start	Address (optional)	Body	Delimiter
~	<i>Device_id@</i>	Message	CR LF

- Device Long Response – Echoing command:

Start	Address (optional)	Body	Delimiter
~	<i>Device_id@</i>	Command SP [<i>Param1 ,Param2 ...</i>] result	CR LF

9.3 Protocol 3000 Commands

This section includes the following commands:

- System Commands (see [Section 9.3.1](#))
- Communication Commands (see [Section 9.3.2](#))
- Switching/Routing Commands (see [Section 9.3.3](#))
- EDID Handling Commands (see [Section 9.3.4](#))

9.3.1 System Commands

All devices running Protocol 3000 use these commands.

Command	Description	Type
#	Protocol handshaking	System-mandatory
BUILD-DATE	Get device build date	System-mandatory
FACTORY	Reset to factory default configuration	System-mandatory
HDCP-STAT?	Get HDCP signal status	System
HELP	Get command list	System-mandatory
IDV	Set visual indication from device	System
INFO-IO	Get in/out count	System
MODEL	Get device model	System-mandatory
NAME	Set/get machine (DNS) name	System – Ethernet
PROT-VER	Get device protocol version	System-mandatory
RESET	Reset device	System-mandatory
SIGNAL?	Get input signal lock status	System
SN	Get device serial number	System-mandatory
VERSION	Get device firmware version	System-mandatory
AV-SW-TIMEOUT	Set/get auto switching timeout	System

9.3.1.1

Functions		Permission	Transparency
Set:	#	End User	Public
Get:	-	-	-
Description		Syntax	
Set:	Protocol handshaking	#	CR
Get:	-	-	-
Response			
~nn@SFOKCR LF			
Parameters			
Response Triggers			
Notes			
Validates the Protocol 3000 connection and gets the machine number Step-in master products use this command to identify the availability of a device			
K-Config Example			
"#", 0x0D			

9.3.1.2 BUILD-DATE

Functions		Permission	Transparency
Set:	-	-	-
Get:	BUILD-DATE?	End User	Public
Description		Syntax	
Set:	-	-	-
Get:	Get device build date	#BUILD-DATE?	CR
Response			
~nr@BUILD-DATESFdateSFtimeCR LF			
Parameters			
<i>date</i> – Format: YYYY/MM/DD where YYYY = Year, MM = Month, DD = Day <i>time</i> – Format: hh:mm:ss where hh = hours, mm = minutes, ss = seconds			
Response Triggers			
Notes			
K-Config Example			
Read the device build date: "#BUILD-DATE?", 0x0D			

9.3.1.3 FACTORY

Functions		Permission	Transparency
Set:	FACTORY	End User	Public
Get:	-	-	-
Description		Syntax	
Set:	Reset device to factory default configuration	# FACTORY CR	
Get:	-	-	
Response			
~nn@ FACTORY SE OK CR LF			
Parameters			
Response Triggers			
Notes			
This command deletes all user data from the device. The deletion can take some time. Your device may require powering off and powering on for the changes to take effect.			
K-Config Example			
Reset the device to its factory default configuration: `# FACTORY `, 0x0D			

9.3.1.4 HDCP-STAT

Functions		Permission	Transparency
Set:	-	-	-
Get:	HDCP-STAT?	End User	Public
Description		Syntax	
Set:	-	-	
Get:	Get HDCP signal status	#HDCP-STAT? <input type="text" value="S"/> <input type="text" value="stage,stage_id"/> <input type="text" value="CR"/>	
Response			
~ <input type="text" value="nr"/> @HDCP-STAT <input type="text" value="S"/> <input type="text" value="stage,stage_id,mode"/> <input type="text" value="CR LF"/>			
Parameters			
<i>stage</i> – 0 (input), 1 (output) <i>stage_id</i> – for input stage: 1 (Input 1 HDMI), 2 (Input 2 HDMI), for output stage: 1 (HDMI Out) <i>actual_status</i> – HDCP signal encryption status: 0 (Off), 1 (On), 2 (Follow input), 3 (Mirror output – MAC mode)			
Response Triggers			
A response is sent to the com port from which the Get command was received			
Notes			
Output stage (1) – get the HDCP signal status of the sink device connected to HDMI Out Input stage (0) – get the HDCP signal status of the source device connected to the specified input			
K-Config Example			
Get the HDCP input signal status of the source device connected to Input 1 HDMI: "#HDCP-STAT? 0,1",0x0D			

9.3.1.5 HELP

Functions		Permission	Transparency
Set:	-	-	-
Get:	HELP	End User	Public
Description		Syntax	
Set:	-	-	
Get:	Get command list or help for specific command	1. #HELP <code>CR</code> 2. #HELP <code>SE</code> COMMAND_NAME <code>CR</code>	
Response			
1. Multi-line: ~ <code>nn</code> @Device available protocol 3000 commands: <code>CR LF</code> command, <code>SE</code> command... <code>CR LF</code> 2. Multi-line: ~ <code>nn</code> @HELP <code>SE</code> command: <code>CR LF</code> description <code>CR LF</code> USAGE:usage <code>CR LF</code>			
Parameters			
COMMAND_NAME – name of a specific command			
Response Triggers			
Notes			
To get help for a specific command use: HELP <code>SE</code> COMMAND_NAME <code>CR LF</code>			
K-Config Example			
"#HELP", 0x0D			

9.3.1.6 IDV

Functions		Permission	Transparency
Set:	IDV	End User	Public
Get:	-	-	-
Description		Syntax	
Set:	Set visual indication from device	#IDV <code>CR</code>	
Get:	-	-	
Response			
~ <code>nn</code> @IDV <code>SE</code> OK <code>CR LF</code>			
Parameters			
Response Triggers			
Notes			
Using this command, some devices can light a sequence of buttons or LEDs to allow identification of a specific device from similar devices			
K-Config Example			
"#IDV", 0x0D			

9.3.1.7 INFO-IO

Functions		Permission	Transparency
Set:	-	-	-
Get:	INFO-IO?	End User	Public
Description		Syntax	
Set:	-	-	
Get:	Get in/out count	# INFO-IO? <input type="checkbox"/>	
Response			
~ <input type="checkbox"/> <input type="checkbox"/> @INFO-IO? <input type="checkbox"/> IN <input type="checkbox"/> SE <input type="checkbox"/> inputs_count,OUT <input type="checkbox"/> SE <input type="checkbox"/> outputs_count <input type="checkbox"/> CR LF			
Parameters			
<i>inputs_count</i> – Number of inputs in the device <i>outputs_count</i> – Number of outputs in the device			
Response Triggers			
Notes			
K-Config Example			
"#INFO-IO?",0x0D			

9.3.1.8 MODEL

Functions		Permission	Transparency
Set:	-	-	-
Get:	MODEL?	End User	Public
Description		Syntax	
Set:	-	-	
Get:	Get device model	# MODEL? <input type="checkbox"/>	
Response			
~ <input type="checkbox"/> <input type="checkbox"/> @MODEL <input type="checkbox"/> SE <input type="checkbox"/> model_name <input type="checkbox"/> CR LF			
Parameters			
<i>model_name</i> – String of up to 19 printable ASCII chars			
Response Triggers			
Notes			
This command identifies equipment connected to Step-in master products and notifies of identity changes to the connected equipment. The Matrix saves this data in memory to answer REMOTE-INFO requests			
K-Config Example			
Get device model: "#MODEL?",0x0D			

9.3.1.9 NAME

Functions		Permission	Transparency
Set:	NAME	Administrator	Public
Get:	NAME?	End User	Public
Description		Syntax	
Set:	Set machine (DNS) name	#NAME[SP]machine_name[CR]	
Get:	Get machine (DNS) name	#NAME?[CR]	
Response			
Set:	~nn@NAME[SP]machine_name[CR LF]		
Get:	~nn@NAME?[SP]machine_name[CR LF]		
Parameters			
<i>machine_name</i> - String of up to 14 alpha-numeric characters (can include hyphens but not at the beginning or end)			
Response Triggers			
Notes			
The machine name is not the same as the model name. The machine name is used to identify a specific machine or a network in use (with DNS feature on).			
K-Config Example			
Set the DNS name of the device to "room-442": "#NAME room-442",0x0D			

9.3.1.10 PROT-VER

Functions		Permission	Transparency
Set:	-	-	-
Get:	PROT-VER?	End User	Public
Description		Syntax	
Set:	-	-	
Get:	Get device protocol version	#PROT-VER?[CR]	
Response			
	~nn@PROT-VER[SP]3000:version[CR LF]		
Parameters			
<i>version</i> - XX.XX where X is a decimal digit			
Response Triggers			
Notes			
K-Config Example			
Get the protocol version: "#PROT-VER?",0x0D			

9.3.1.1 RESET

Functions		Permission	Transparency
Set:	RESET	Administrator	Public
Get:	-	-	-
Description		Syntax	
Set:	Reset device	#RESET CR	
Get:	-	-	
Response			
~nn@RESETSEOK CR LF			
Parameters			
Response Triggers			
Notes			
To avoid locking the port due to a USB bug in Windows, disconnect USB connections immediately after running this command. If the port was locked, disconnect and reconnect the cable to reopen the port.			
K-Config Example			
Reset the device: "#RESET", 0x0D			

9.3.1.1 SIGNAL

Functions		Permission	Transparency
Set:	-	-	-
Get:	SIGNAL?	End User	Public
Description		Syntax	
Set:	-	-	
Get:	Get input signal lock status	# SIGNAL? <input type="checkbox"/> <i>inp_id</i> <input type="checkbox"/>	
Response			
~ <input type="checkbox"/> @ SIGNAL <input type="checkbox"/> <i>inp_id,status</i> <input type="checkbox"/>			
Parameters			
<i>inp_id</i> - input number <i>status</i> - lock status according to signal validation: 0 (LPCM 2CH) 1 (LPCM 6CH) 2 (LPCM 8CH) 3 (Bitstream) 4 (HD)			
Response Triggers			
After execution, a response is sent to the com port from which the Get was received Response is sent after every change in input signal status ON to OFF, or OFF to ON			
Notes			
K-Config Example			
Get input signal lock status of input 1 `#SIGNAL? 1",0x0D			

9.3.1.2 SN

Functions		Permission	Transparency
Set:	-	-	-
Get:	SN?	End User	Public
Description		Syntax	
Set:	-	-	
Get:	Get device serial number	# SN? <code>CR</code>	
Response			
~ <code>nn</code> @ SN <code>SE</code> <i>serial_number</i> <code>CR LF</code>			
Parameters			
<i>serial_number</i> – 11 decimal digits, factory assigned			
Response Triggers			
Notes			
This device has a 14 digit serial number, only the last 11 digits are displayed			
K-Config Example			
Get device serial number: "#SN?",0x0D			

9.3.1.3 VERSION

Functions		Permission	Transparency
Set:	-	-	-
Get:	VERSION?	End User	Public
Description		Syntax	
Set:	-	-	
Get:	Get firmware version number	# VERSION? <code>CR</code>	
Response			
~ <code>nn</code> @ VERSION <code>SE</code> <i>firmware_version</i> <code>CR LF</code>			
Parameters			
<i>firmware_version</i> – XX.XX.XXXX where the digit groups are: major.minor.build version			
Response Triggers			
Notes			
K-Config Example			
Get the firmware version number: "#VERSION?",0x0D			

9.3.1.1 AV-SW-TIMEOUT

Functions		Permission	Transparency
Set:	AV-SW-TIMEOUT	End User	Public
Get:	AV-SW-TIMEOUT?	End User	Public
Description		Syntax	
Set:	Set auto switching timeout	# AV-SW-TIMEOUT SP <i>action,time_out</i> CR	
Get:	Get auto switching timeout	# AV-SW-TIMEOUT? SP <i>action</i> CR	
Response			
~ nn @ AV-SW-TIMEOUT SP <i>action,time_out</i> CR			
Parameters			
<p><i>action</i> – event that triggers the auto switching timeout:</p> <ul style="list-style-type: none"> 0 (video signal lost) 2 (audio signal lost) 4 (disable 5V on video output if no input signal detected) 5 (video cable unplugged) 6 (audio cable unplugged) <p><i>timeout</i> – timeout in seconds: 0-60000</p>			
Response Triggers			
Notes			
<p>The timeout must not exceed 60000 seconds.</p> <p>The timeout for video and audio signal lost (0, 2) events must not be less than 5 seconds.</p> <p>The timeout for video and audio cable unplugged (5, 6) events must not exceed the timeout for the disable 5V on video output if no input signal detected (4) event.</p> <p>The timeout for the disable 5V on video output if no input signal detected (4) event must not be less than the timeout for video and audio cable unplugged (5, 6) events.</p> <p>The timeout for the disable 5V on video output if no input signal detected (4) event overlaps with the timeouts for all other events (0, 2, 5, 6).</p>			
K-Config Example			
<p>Set the auto switching timeout to 5 seconds in the event of video signal lost:</p> <pre>"#AV-SW-TIMEOUT 0,5",0x0D</pre>			

9.3.2 Communication Commands

Command	Description	Type
UART	Set/get com port configuration	Communication

9.3.2.1 UART

Functions	Permission	Transparency
Set: UART	Administrator	Public
Get: UART?	End User	Public
Description	Syntax	
Set: Set com port configuration	# UART [SE]COM_Num,baud_rate,data_bit,parity,stop_bit[CR]	
Get: Get com port configuration	# UART? [SE]COM_Num[CR]	
Response		
Set: ~nn@ UART [SE]COM_Num,baud_rate,data_bit,parity,stop_bit[CR LF]		
Get: ~nn@ UART [SE]COM_Num,baud_rate,data_bit,parity,stop_bit,serial_type,[CR LF]		
Parameters		
<i>COM_Num</i> - 1 (RS-232 Terminal Block) <i>baud_rate</i> - 9600, 115200 <i>data_bit</i> - 7, 8 <i>parity</i> - N (No), O (Odd), E (Even), M (Mark), S (Space) <i>stop_bit</i> - 1, 2 <i>serial_type</i> - 232		
Response Triggers		
Notes		
If Serial1 is configured when RS-485 is selected, the RS-485 UART port is automatically changed		
K-Config Example		
Set the RS-232 Terminal Block to 115200 baud rate, 8 data bits, no parity, 1 stop bit: "#UART 1,115200,8,N,1",0x0D		

9.3.3 Switching Commands

Command	Description	Type
DISPLAY	Get output HPD status	Switching
MTX-MODE	Set/get auto-switch mode	Switching
VID	Set/get video switch state	Switching

9.3.3.1 DISPLAY

Functions		Permission	Transparency
Set:	-	-	-
Get	DISPLAY?	End User	Public
Description		Syntax	
Set:	-	-	
Get:	Get output HPD status	# DISPLAY? SP out_id CR	
Response			
~ nn @ DISPLAY SE out_id,status CR LF			
Parameters			
out_id-1 (HDMI Out) status- HPD status according to signal validation : 0 (Off), 1 (On), 2 (On and all parameters are stable and valid)			
Response Triggers			
A response is sent to the com port from which the Get was received, after command execution and: After every change in output HPD status from On to Off (0) After every change in output HPD status from Off to On (1) After every change in output HPD status form Off to On and all parameters (new EDID, etc.) are stable and valid (2)			
Notes			
K-Config Example			
Get the output HPD status of HDMI Out: `#DISPLAY? 1",0x0D`			

9.3.3.2 MTX-MODE

Functions		Permission	Transparency
Set:	MTX-MODE	End User	Public
Get:	MTX-MODE?	End User	Public
Description		Syntax	
Set:	Set auto-switch mode	# MTX-MODE [SE]output_id,mode[CR]	
Get:	Get auto-switch mode	# MTX-MODE? [SE]output_id[CR]	
Response			
~nn[CR]@ MTX-MODE [SE]output_id,mode[CR]			
Parameters			
output_id - 1 (HDMI Out) mode - 0 (manual), 1 (auto priority), 2 (auto last connected)			
Response Triggers			
After execution, a response is sent to the com port from which the Set/Get was received After execution, a response is sent to all com ports if MTX-MODE was set by any other external control device (button press, WEB, device menu and similar)			
Notes			
Not recommended for new devices			
K-Config Example			
Set the auto switch mode of HDMI Out to last connected input: "#MTX-MODE 1,2",0x0D			

9.3.3.3 VID

Functions		Permission	Transparency
Set:	VID	End User	Public
Get:	VID?	End User	Public
Description		Syntax	
Set:	Set video switch state	#VID[SP]in>out[CR]	
Get:	Get video switch state	#VID?[SP]out[CR]	
Response			
Set:	~nn@VID[SP]in>out[CR LF]		
Get:	~nn@VID[SP]in>out[CR LF]		
Parameters			
<i>in</i> – 0 (disconnect output), 1 (Input 1 HDMI), 2 (Input 2 HDMI) > – Connection character between in and out parameters <i>out</i> – 1 (HDMI Out), * (all outputs)			
Response Triggers			
Notes			
The GET command identifies input switching on Step-in clients New Step-in modules support the ROUTE command			
K-Config Example			
Set the video switch state of HDMI Out to Input 1 HDMI: "#VID 1>1",0x0D			

9.3.4 EDID Handling Commands

Command	Description	Type
CPEDID	Copy EDID data from the output to the input EEPROM	EDID Handling
GEDID	Set/get EDID data	EDID Handling
LDEDID	Load EDID data	EDID Handling

9.3.4.1 CPEDID

Functions	Permission	Transparency
Set:	CPEDID	End User
Get:	-	-
Description	Syntax	
Set:	#CPEDID[S]src_type,src_id,dst_type,dest_bitmap[CR]	
Get:	-	
Response	~nn@CPEDID[S]src_type,src_id,dst_type,dest_bitmap[CR LF]	
Parameters	<p>src_type – EDID source type (usually output): 1 (output), 2 (default EDID)</p> <p>src_id – for output source: 1 (HDMI Out), for default EDID source: 1 (default EDID)</p> <p>dst_type – EDID destination type (usually input): 0 (input)</p> <p>dest_bitmap – destination input to which the EDID data is copied: 1 (Input 1 HDMI), 2 (Input 2 HDMI), 3 (Input 1 HDMI and Input 2 HDMI)</p>	
Response Triggers	Response is sent to the com port from which the Set was received (before execution)	
Notes		
K-Config Example	<p>Copy the EDID data from the HDMI Out output (EDID source) to the Input 1 HDMI: "#CPEDID 1,1,0,1",0x0D</p> <p>Copy the EDID data from the default EDID source to Input 1 HDMI and Input 2 HDMI: "#CPEDID 2,1,0,3",0x0D</p>	

Command - GEDID		Command Type - EDID Handling	
Command Name		Permission	Transparency
Set:	GEDID	Administrator	Public
Get:	GEDID?	End User	Public
Description		Syntax	
Set:	Set EDID data from device	#GEDID _{SP} stage, stage_id _{CR}	
Get:	Get EDID support on certain input/output	#GEDID? _{SP} stage, stage_id _{CR}	
Response			
Set:			
Multi-line response:			
~nn@GEDID _{SP} stage,stage_id,size _{CR LF}			
EDID_data _{CR LF}			
~nn@GEDID _{SP} stage,stage_id _{SP} OK _{CR LF}			
Get:			
~nn@GEDID _{SP} stage,stage_id,size _{CR LF}			
Parameters			
stage - input/output			
0 (input)			
1 (output)			
2 (default EDID)			
3 (custom EDID)			
stage_id - number of chosen stage (1.. max number of inputs/outputs)			
size - EDID data size. For Set, size of data to be sent from device, for Get, 0 means no EDID support			
Response Triggers			
Response is sent to the com port from which the Set (before execution) / Get command was received			
Notes			
For Get, size=0 means EDID is not supported			
For old devices that do not support this command, ~nn@ERR 002 _{CR LF} is received			
K-Config Example			
Set the EDID data (size x) from the HDMI Out 1: "#GEDID 1,1,x",0x0D			

Command - LDEDID		Command Type - EDID Handling	
Command Name		Permission	Transparency
Set:	LDEDID	End User	Public
Get:	-	-	-
Description		Syntax	
Set:	Write EDID data from external application to device	Multi-step syntax (see following steps)	
Get:	-	-	
Communication Steps (Command and Response)			
<p>Step 1: #LDEDID_{SP}dst_type, dest_bitmask, size, safe_mode_{CR}</p> <p>Response 1: ~nn@LDEDID_{SP}dst_type, dest_bitmask, size, safe_mode_{SP}READY_{CR LF} or ~nn@LDEDID_{SP}ERRnn_{CR LF}</p> <p>Step 2: If ready was received, send EDID_DATA</p> <p>Response 2: ~nn@LDEDID_{SP}dst_type, dest_bitmask, size, safe_mode_{SP}OK_{CR LF} or ~nn@LDEDID_{SP}ERRnn_{CR LF}</p>			
Parameters			
<p>dst_type - EDID destination type (usually input)</p> <p>0 (input)</p> <p>1 (output)</p> <p>2 (default EDID)</p> <p>3 (custom EDID)</p> <p>dest_bitmask - bitmap representing destination IDs. Format: 0x*****, where * is ASCII presentation of hex digit. The binary presentation of this number is a bit mask for destinations. Setting '1' means EDID data has to be copied to this destination</p> <p>size - EDID data size</p> <p>safe_mode - 0 - Device accepts the EDID as is without trying to adjust 1 - Device tries to adjust the EDID</p> <p>EDID_DATA - data in protocol packets (see Section 9.2)</p>			
Response Triggers			
Response is sent to the com port from which the Set (before execution)			
Notes			
<p>When the unit receives the LDEDID command it replies with READY and enters the special EDID packet wait mode. In this mode the unit can receive only packets and not regular protocol commands.</p> <p>If the unit does not receive correct packets for 30 seconds or is interrupted for more than 30 seconds before receiving all packets, it sends timeout error ~nn@LDEDID_{SP}ERR01_{CR LF} and returns to the regular protocol mode. If the unit received data that is not a correct packet, it sends the corresponding error and returns to the regular protocol mode.</p> <p>See Protocol Packet reference in Section Error! Reference source not found.</p>			
K-Config Example			
Write the EDID data (size x) to the HDMI Out 1, adjust for safe mode: "#LDEDID 1,1,x,1",0x0D			

LIMITED WARRANTY

The warranty obligations of Kramer Electronics for this product are limited to the terms set forth below:

What is Covered

This limited warranty covers defects in materials and workmanship in this product.

What is Not Covered

This limited warranty does not cover any damage, deterioration or malfunction resulting from any alteration, modification, improper or unreasonable use or maintenance, misuse, abuse, accident, neglect, exposure to excess moisture, fire, improper packing and shipping (such claims must be presented to the carrier), lightning, power surges, or other acts of nature. This limited warranty does not cover any damage, deterioration or malfunction resulting from the installation or removal of this product from any installation, any unauthorized tampering with this product, any repairs attended by anyone unauthorized by Kramer Electronics to make such repairs, or any other cause which does not relate directly to a defect in materials and/or workmanship of this product. This limited warranty does not cover cartons, equipment enclosures, cables or accessories used in conjunction with this product.

Without limiting any other exclusion herein, Kramer Electronics does not warrant that the product covered hereby, including, without limitation, the technology and/or integrated circuit(s) included in the product, will not become obsolete or that such items are or will remain compatible with any other product or technology with which the product may be used.

How Long Does this Coverage Last

Seven years as of this printing; please check our Web site for the most current and accurate warranty information.

Who is Covered

Only the original purchaser of this product is covered under this limited warranty. This limited warranty is not transferable to subsequent purchasers or owners of this product.

What Kramer Electronics will do

Kramer Electronics will, at its sole option, provide one of the following three remedies to whatever extent it shall deem necessary to satisfy a proper claim under this limited warranty:

1. Elect to repair or facilitate the repair of any defective parts within a reasonable period of time, free of any charge for the necessary parts and labor to complete the repair and restore this product to its proper operating condition. Kramer Electronics will also pay the shipping costs necessary to return this product once the repair is complete.
2. Replace this product with a direct replacement or with a similar product deemed by Kramer Electronics to perform substantially the same function as the original product.
3. Issue a refund of the original purchase price less depreciation to be determined based on the age of the product at the time remedy is sought under this limited warranty.

What Kramer Electronics will not do Under This Limited Warranty

If this product is returned to Kramer Electronics or the authorized dealer from which it was purchased or any other party authorized to repair Kramer Electronics products, this product must be insured during shipment, with the insurance and shipping charges prepaid by you. If this product is returned uninsured, you assume all risks of loss or damage during shipment. Kramer Electronics will not be responsible for any costs related to the removal or re-installation of this product from or into any installation. Kramer Electronics will not be responsible for any costs related to any setting up this product, any adjustment of user controls or any programming required for a specific installation of this product.

How to Obtain a Remedy under this Limited Warranty

To obtain a remedy under this limited warranty, you must contact either the authorized Kramer Electronics reseller from whom you purchased this product or the Kramer Electronics office nearest you. For a list of authorized Kramer Electronics resellers and/or Kramer Electronics authorized service providers, please visit our web site at www.kramerelectronics.com or contact the Kramer Electronics office nearest you.

In order to pursue any remedy under this limited warranty, you must possess an original, dated receipt as proof of purchase from an authorized Kramer Electronics reseller. If this product is returned under this limited warranty, a return authorization number, obtained from Kramer Electronics, will be required. You may also be directed to an authorized reseller or a person authorized by Kramer Electronics to repair the product.

If it is decided that this product should be returned directly to Kramer Electronics, this product should be properly packed, preferably in the original carton, for shipping. Cartons not bearing a return authorization number will be refused.

Limitation on Liability

THE MAXIMUM LIABILITY OF KRAMER ELECTRONICS UNDER THIS LIMITED WARRANTY SHALL NOT EXCEED THE ACTUAL PURCHASE PRICE PAID FOR THE PRODUCT. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY. Some countries, districts or states do not allow the exclusion or limitation of relief, special, incidental, consequential or indirect damages, or the limitation of liability to specified amounts, so the above limitations or exclusions may not apply to you.

Exclusive Remedy

TO THE MAXIMUM EXTENT PERMITTED BY LAW, THIS LIMITED WARRANTY AND THE REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. TO THE MAXIMUM EXTENT PERMITTED BY LAW, KRAMER ELECTRONICS SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF KRAMER ELECTRONICS CANNOT LAWFULLY DISCLAIM OR EXCLUDE IMPLIED WARRANTIES UNDER APPLICABLE LAW, THEN ALL IMPLIED WARRANTIES COVERING THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL APPLY TO THIS PRODUCT AS PROVIDED UNDER APPLICABLE LAW.

IF ANY PRODUCT TO WHICH THIS LIMITED WARRANTY APPLIES IS A "CONSUMER PRODUCT" UNDER THE MAGNUSON-MOSS WARRANTY ACT (15 U.S.C.A. §2301, ET SEQ.) OR OTHER APPLICABLE LAW, THE FOREGOING DISCLAIMER OF IMPLIED WARRANTIES SHALL NOT APPLY TO YOU, AND ALL IMPLIED WARRANTIES ON THIS PRODUCT, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR THE PARTICULAR PURPOSE, SHALL APPLY AS PROVIDED UNDER APPLICABLE LAW.

Other Conditions

This limited warranty gives you specific legal rights, and you may have other rights which vary from country to country or state to state.

This limited warranty is void if (i) the label bearing the serial number of this product has been removed or defaced, (ii) the product is not distributed by Kramer Electronics or (iii) this product is not purchased from an authorized Kramer Electronics reseller. If you are unsure whether a reseller is an authorized Kramer Electronics reseller, please visit our Web site at www.kramerelectronics.com or contact a Kramer Electronics office from the list at the end of this document.

Your rights under this limited warranty are not diminished if you do not complete and return the product registration form or complete and submit the online product registration form. Kramer Electronics thanks you for purchasing a Kramer Electronics product. We hope it will give you years of satisfaction.

KRAMER



P/N:



Rev: 1



SAFETY WARNING

Disconnect the unit from the power supply before opening and servicing

For the latest information on our products and a list of Kramer distributors, visit our Web site to find updates to this user manual.

We welcome your questions, comments, and feedback.

www.kramerAV.com
info@kramarel.com