



LX-MU500
MULTIMEDIA PROJECTOR

LX-MW500
MULTIMEDIA PROJECTOR

VERSATILE IN PERFORMANCE READY FOR EVERY NEED

Perfect for any professional settings, Canon LX-MU500 and LX-MW500 DLP Projectors are as dynamic as you are. Featuring 5000 lumens of brightness with BrilliantColor™ system and 6-Axis Colour Adjust, you can look forward to true-to-life projection quality. They are compact in size, with adaptable lens adjustment functions, for incredible flexibility wherever work takes you. Both projectors also include connectivity choices with HDBaseT™ receiver, HDMI and Mobile High-Definition Link (MHL) inputs.



Brightness of
5000 Lumens



HDBaseT™
Connectivity




Brightness of 5000 Lumens

Balancing unrivalled image quality and versatility, the compact LX-MU500 and LX-MW500 are ideal for a range of education and corporate markets.



HDBaseT™ Connectivity

HDBaseT™ allows uncompressed HD video, audio and control signals to be transmitted over one single Ethernet cable with a maximum distance of 328 feet (100m).

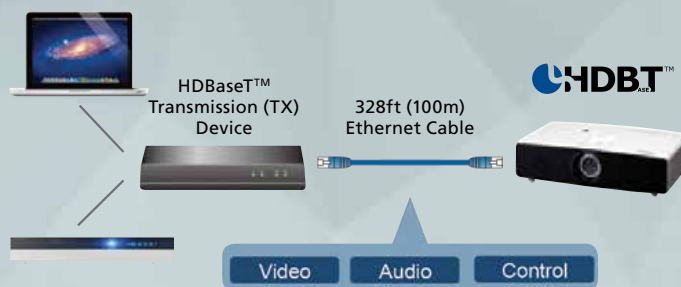

PROJECTOR SPECIFICATIONS			
MODEL NAME		LX-MU500	LX-MW500
PROJECTION SYSTEM	Imaging Device	DMD x1	
	Aspect Ratio	16:10	
	Native Resolution	WUXGA (1920 x 1200)	WXGA (1280 x 800)
	Brightness	5000 / 4000lm ^{*2}	
	Uniformity	75%	
	Contrast Ratio	2500:1	3750:1
	Digital Keystone	V: ± 30°, H: ± 30°	
	Lens Shift	V: 52.5% – 55.0% (Manual)	V: 55.0% – 57.5% (Manual)
OPTICS	F Number, Focal Length	F2.45 – F3.07, f=15.75 – 25.1mm	
	Zoom	1.6x	
	Focus	Manual	
	Image Size W	60" ~ 240"	
	Image Size T	60" ~ 150"	
	Throw Ratio	1.07 – 1.71:1 ^{*1}	1.12 – 1.80:1 ^{*1}
IMAGE ADJUSTMENTS	Image Modes	Presentation / Standard / sRGB / Movie / DICOM / User 1 / User 2	
	Colour Adjustment	Colour Temperature, Colour Balance, Colour Tint	
	Screen Colour Correction	Light Yellow, Pink, Light Green, Blue, Blackboard	
	Mounting	Front Table, Rear Table, Front Ceiling, Rear Ceiling	
	Adjustable Feet	Front: 2 (Angle of Elevation of up to 4.5°)	
IMAGE SIGNALS	Scanning Frequency	V: 24Hz – 119.989Hz, H: 15.73kHz – 101.563kHz	
	Analog PC Input	WUXGA / WSXGA+ / UXGA / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA / MAC	
	Digital PC Input	WUXGA / WSXGA+ / UXGA / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA	
	Component Video Input	1080p / 1080i / 720p / 576p / 576i / 480p / 480i	
	Digital Video Input	1080p / 1080i / 720p / 576p / 480p	
	Dot Clock	162.00MHz	157.50MHz
	MHL Input	1080p / 1080i / 720p / 576p / 576i / 480p / 480i	
	Video Input / S-video Input	NTSC / PAL / SECAM / NTSC4.43 / PAL-M / PAL-N / PAL-60	

PROJECTOR SPECIFICATIONS			
MODEL NAME		LX-MU500	LX-MW500
TERMINALS	Mini Dsub15	Analog PC / Component Video Input (x2), Analog PC / Component Video Output (x1)	
	HDMI	Digital PC / Digital Video Input	
	HDMI/MHL	Digital PC / Digital Video / MHL Input	
	Mini DIN4	S-video Input	
	RCA x3	Video Input / Audio-L / Audio-R	
	RJ-45 HDBaseT™	Network Connection (100BASE-TX / 10BASE-T) HDBaseT™ Input	
	Dsub9 (Control)	RS-232C	
	USB Type A	Power Out	
	USB Type B	Service Port	
	Mini Jack	Audio Input (x1), Audio Output (x1)	
REMOTE CONTROL	Wireless Remote	IR	
BUILT-IN-SOUND	Internal Amplifier	10W, Monaural	
LAMP	Type	Super-High Pressure Lamp	
	Life	2000H / 2500H (Lamp Mode: Normal / Eco) ^{*5}	
	Lamp Power	370 / 296W ^{*2}	
RATINGS	Fan Noise	36 / 33dB ^{*2}	
	Power Consumption	500 / 400W ^{*2}	
	Standby Power Consumption	3.0 / 0.5W ^{*3}	
	Power Voltage	AC100 – 240V : 50 / 60Hz	
	Operating Temperature	0°C – 40°C (RH: 10 – 80%) ^{*4}	0°C – 40°C (RH: 10 – 90%) ^{*4}
	Dimensions (W x H x D)	465mm x 123mm x 264mm	
	Weight	5.4kg	

^{*1} Calculated value for 100" image.

^{*2} Lamp Mode is Normal / Eco. Brightness in Eco mode is only a calculated value and is not guaranteed as specification.

^{*3} Stand by LAN function is on / off.

^{*4} Non-condensing.

^{*5} These values do not guarantee the operation life of lamps.

^{*6} This accessory is not pre-installed when the projector is purchased.

WHAT'S IN THE BOX

- Projector
- Power Cord
- Computer Cable (Mini D-sub 15pin)
- Projector Remote Control: LV-RC08 (Battery Type: CR2025)
- Important Information
- User's Manual (CD-ROM)
- Warranty Card


ACCESSORIES/REPLACEMENT PARTS

Remote Control LV-RC08

Replacement Lamp LX-LP02

Replacement Air Filter LX-FL02^{*6}

CONNECTABILITY

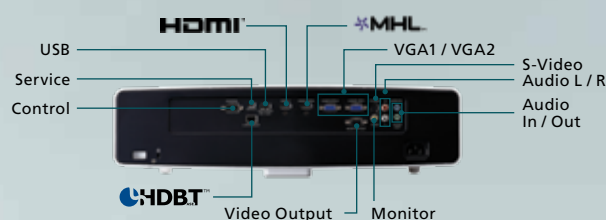

Canon Offices

INDIA
Canon India Pvt. Ltd.
Tel: 124-416-0000 Fax: 124-416-0011
www.canon.co.in

MALAYSIA
Canon Marketing (Malaysia) Sdn. Bhd.
Tel: 60-3-78446000 Fax: 60-3-78477222
www.canon.com.my

SINGAPORE
Canon Singapore Pte. Ltd. (Domestic Operations)
Tel: 65-6799-8888 Fax: 65-6798-8882
www.canon.com.sg

THAILAND
Canon Marketing (Thailand) Co. Ltd.
Tel: 02-344-9988 Fax: 02-344-9861
www.canon.co.th

VIETNAM
Canon Marketing Vietnam Co. Ltd.
Ho Chi Minh City
Tel: 848-3820-0466 Fax: 848-3820-0477
Hanoi
Tel: 844-37711677 Fax: 844-37711678
www.canon.com.vn

Canon Business Partners

BANGLADESH
J.A.N. Associates Ltd.
Tel: 880-2-9660601
Fax: 880-2-8610410

BRUNEI
Interhouse Company Sdn. Bhd.
Tel: 673-2-653001
Fax: 673-2-653003

CAMBODIA
I-Quick (Cambodia) Pte. Ltd.
Tel: 855-23-996638
Fax: 855-23-996639

INDONESIA
PT Datascrip
Canon Call Center
Tel: 021-2922-6000
Fax: 62-21-6544811 to 13
www.canon.co.id

MALDIVES
SIMDI Company (Pvt) Ltd.
Tel: 960-3334421
Fax: 960-3334424

MYANMAR
Myanmar Golden Rock
International Co., Ltd.
Tel: 001-95-1654810 to 654819
Fax: 001-95-1654820

NEPAL
International Electronics
Concern (P) Ltd.
Tel: 977-1-4221991
Fax: 977-1-4221909

PAKISTAN
Shirazi Trading Co. (Pvt) Ltd.
Tel: 92-21-32417737, 32417746
Fax: 92-21-32417747

SRI LANKA
Metropolitan Office (Pvt) Ltd.
Tel: 94-114-700-200
Fax: 94-114-700-267

Dealer's Stamp

0202W131

Canon

**SOUTH & SOUTHEAST ASIA
REGIONAL HEADQUARTERS**

CANON SINGAPORE PTE. LTD.
1 Fusionopolis Place,
#15-10 Galaxis, Singapore 138522
www.canon-asia.com