

XEED WUX500ST

OUTSTANDING VERSATILITY MAKES THE XEED WUX500ST IDEAL FOR INSTALLATION, EDUCATION AND CORPORATE USE.



The compact, flexible and efficient XEED WUX500ST features 5,000-lumens colour brightness, built-in HDBaseT and 75% vertical lens shift – providing a complete short throw installation projector solution.



- Smooth, engaging images delivered by LCOS technology
- Faithful image reproduction thanks to native WUXGA (1920 x 1200) resolution
- Low distortion Canon lens produces 100-inch display from just 1.2 metres
- Punchy, captivating output ensured by impressive 5,000-lumens colour brightness
- Vivid colours and true blacks from 2,000:1 contrast ratio
- Numerous installation possibilities afforded by versatile 75% vertical lens shift
- Advanced edge-blending with 4-point keystone correction for seamless multiple projector connection
- Broad range of connectivity options with built-in HDBaseT, as well as HDMI, DVI and Wi-Fi
- Connect up to 10 devices at once with full control over presenter privileges thanks to Networked Multi-Projection (NMPJ) software
- Peace of mind with 3-year lamp replacement warranty, next-day loan service* and superb energy efficiency

*Next day means that where possible, the loan product will be provided on the day after the repair request. If the request is received after midday, on a weekend or a public holiday, the loan product will be received within two days. This loan service is subject to full terms and conditions and is only available in certain territories.



HDMI



Link

PRODUCT RANGE



XEED WUX500



XEED WUX500ST



LX-MU500

XEED 4K501ST
XEED WUX6500
XEED WUX500
XEED WUX500ST
LX-MU500

Canon

TECHNICAL SPECIFICATIONS

XEED WUX500ST

PANEL

Type	LCOS reflective display, TFT Active Matrix
Size and Number	0.71" diagonal, 3 panels
Aspect Ratio	16:10
Native Resolution	1920 x 1200 (WUXGA), 2304000 pixels

OPTICS

Lamp Type	280W NSHA
Lens F Number and Focal Length	F2.7; f=8.8 mm
Zoom Magnification and Control	1.0x Optical (fixed)
Focus Control	Manual
Lens Shift	Vertical: 0% to +75%, Manual Horizontal: +/-10%, Manual

IMAGE AND AUDIO

Brightness	5000 lumens (3460 lumens in Eco Mode)
Colour Brightness	5000 lumens (3460 lumens in Eco Mode)
Brightness Uniformity	80%
Contrast Ratio	2000:1
Projection Distance Coverage	0.35 m – 3.64 m (1.2m for 100" image)
Screen Size	30" - 300" (65 cm x 40 cm – 646 cm x 404 cm)
Throw Ratio	0.56 : 1
Digital Zoom Magnification	12x max
Keystone Correction Range	Vertical: +/-12° Horizontal: +/-12°
Digital RGB Compatibility	WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA
Analogue RGB Compatibility	WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA
Digital Video Scan Systems	1080p / 1080i / 720p / 576p / 480p
Component Video Scan Systems	1080p / 1080i / 720p / 576p / 576i / 480p / 480i
HDBaseT input	Equivalent to the input for HDMI terminal
Image Modes (Depends on input)	Standard / Presentation / Dynamic / Photo/sRGB / Video / User 1-5 / DICOM sim (only available on DICOM projector model)
USB Supported File Types	JPEG still image
Built-in Speaker	5.0W RMS, Monaural

PORTS AND CONNECTORS

Digital RGB Input	DVI-I 29-pin (shared)
Digital Video and Audio Input	HDMI (supporting Deep Colour)
Analogue RGB Input 1	DVI-I 29-pin (shared)
Analogue RGB Input 2	Mini D-Sub 15-pin (Component via optional adaptor cable)
Audio Input 1	3.5 mm stereo mini-jack
Audio Input 2	3.5 mm stereo mini-jack
Audio Output	3.5 mm stereo mini-jack (variable level)
USB Port	USB Type A
Service Port / RS232C Control	Mini D-Sub 9-pin
Network Port	RJ-45 (1000BASE-T / 100BASE-TX / 10BASE-T)
HDBaseT	RJ-45 (HDBaseT)
Wired Remote Control	3.5 mm stereo mini-jack
Wi-Fi	IEEE 802.11b / g / n, Approx 25 m. Infrastructure mode & PjAP mode
Wi-Fi WPS	Push button method (PBS) & PIN code method (PIN)
Wi-Fi Encryption	Open / WEP / WPA-PSK TKIP / WPA-PSK AES / WPA2-PSK TKIP / WPA2-PSK AES
MECHANISMS	
Front Elevation Mechanism	Two rotary feet, 6° maximum image elevation
RATINGS	
Dimensions (W x H x D)	337 mm x 136 mm x 415 mm
Weight	6.3 kg
Power Source	100V - 240V AC, 50/60Hz
Power Consumption	Normal Mode: 395W / Eco Mode: 295W / Standby: 1.8W / Standby (LAN & HDBaseT off): 0.2W
Lamp Life	3000 hr / 5000 hr (Eco mode)
Noise Level	38dBA / 30dBA (Eco mode)
Operating Environment	0°C to +40°C, 20%RH - 85%RH
Storage Environment	-20°C to +60°C
Warranty	3 Years

Footnotes


All data is based on Canon standard testing methods except where indicated
Subject to change without notice.



OUTSTANDING VERSATILITY MAKES THE XEED WUX500ST IDEAL FOR INSTALLATION, EDUCATION AND CORPORATE USE.

The compact, flexible and efficient XEED WUX500ST features 5,000-lumens colour brightness, built-in HDBaseT and 75% vertical lens shift – providing a complete short throw installation projector solution.

XEED WUX500ST

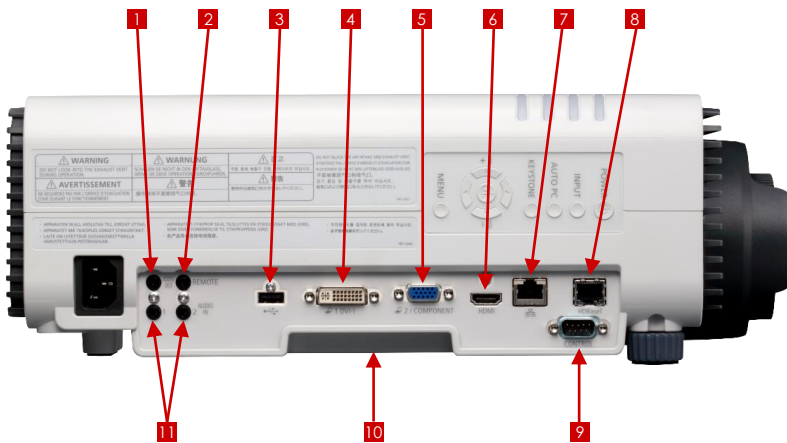

- 1** Mini jack (Stereo audio out)
- 2** Mini jack (Wired remote control connection)
- 3** USB (Firmware update, PC-less presentation)
- 4** DVI-I (Digital PC / Analogue PC)
- 5** Mini Dsub 15 (Analogue PC / Component)
- 6** HDMI (incl. audio, supporting deep colour)
- 7** RJ-45 (1000Base-T/100Base-TX/10Base-T)
- 8** RJ-45 HDBaseT (Supports NMPJ & Crestron)
- 9** RS-232C Connection
- 10** Built in Wi-Fi (IEEE 802.11b / g / n)
- 11** Stereo audio x 2 (Mini jack)

2. Mini-jack (wired remote control): When a cable is connected for a wired remote control no infrared signal is accepted to the projector.

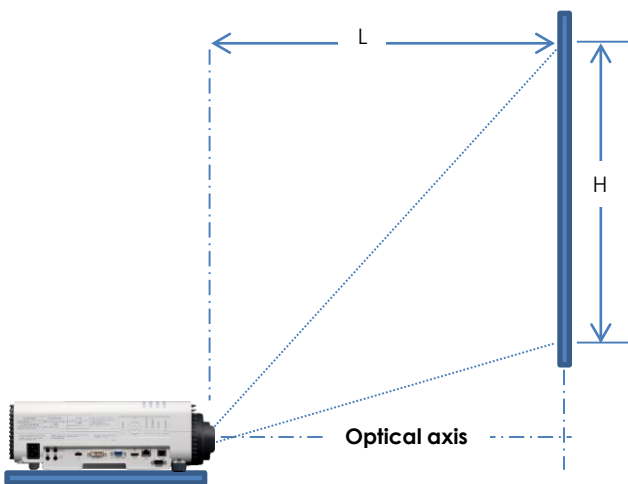


Image size 16:10			Distance
Diagonal (inch)	Width (m)	Height (m)	Fixed (m)
30	0.65	0.40	0.35
40	0.86	0.54	0.47
60	1.29	0.81	0.72
80	1.72	1.08	0.96
100	2.15	1.35	1.2
120	2.58	1.62	1.45
150	3.23	2.02	1.81
180	3.38	2.42	2.18
200	4.31	2.69	2.42
220	4.74	2.96	2.66
250	5.38	3.37	3.03
280	6.03	3.77	3.39
300	6.46	4.04	3.64

Ideal for use in digital signage or for creative display the projector can also be positioned within the 360 degrees axis. The life of the lamp will be lower than in normal use.

Canon Throw Distance Calculator: <http://www.canon.com/lcd-sim/>



OUTSTANDING VERSATILITY MAKES THE XEED WUX500ST IDEAL FOR INSTALLATION, EDUCATION AND CORPORATE USE.

XEED WUX500ST

The compact, flexible and efficient XEED WUX500ST features 5,000-lumens colour brightness, built-in HDBaseT and 75% vertical lens shift – providing a complete short throw installation projector solution.

Sales Start Date: July 2017



PRODUCT DETAILS:

Product Name	Mercury Code	EAN Code
Multimedia Projector XEED WUX500ST	2136C003AA	4549292089677
Multimedia Projector XEED WUX500ST Medical	2136C008AA	8714574653051

OPTIONAL ACCESSORIES:

Product Name	Mercury Code	EAN Code
Lamp Assembly RS-LP08	8377B001AA	4960999977201
Ceiling Attachment RS-CL16	1214C001AA	4549292060263
Ceiling Pipe 400-600mm RS-CL08	3096B001AA	4960999614144
Ceiling Pipe 600-1000mm RS-CL09	3097B001AA	4960999614151
Projector Option Foot RS-F101 (4PCS)	8380B001AA	4960999977232
Replacement Air Filter RS-FL02	8379B001AA	4960999977225
Remote Controller RS-RC05 (to be used as wired remote controller)	5750B001AA	4960999810393

MEASUREMENT / LOGISTIC INFORMATION:

Product Name	Mercury Code	Pack type	Pack description	Quantity per pack	Length (mm)	Width (mm)	Height (mm)	Net Weight (kg)	Gross Weight (kg)
Multimedia Projector XEED WUX500ST	2136C003AA	EA	Each	1	412	337	136	Approx. 6.3	
Multimedia Projector XEED WUX500ST Medical	2136C008AA	CT	Carton	1	540	450	340		Approx. 9.1

What's in the box?

- Remote Control Unit: RS-RC06
- AAA Alkaline Batteries x 2
- AC Mains Power Cable
- VGA to VGA Computer Connection Cable, 1.8m