


MultiSync® X464UNS

NEC LCD 46" Video Wall Display

Datasheet

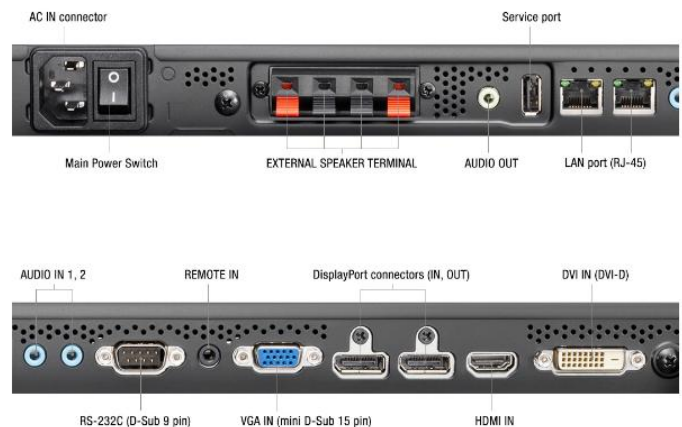

The new ultra slim X464UNS sets the standard for videowalls. It features a 3.5 mm bezel to create impressive high resolution videowalls with barely visible bezels. With perfect picture quality and high product reliability, these displays are designed for the rigors of 24/7 operation. The new Frame Comp functionality supports a seamless appearance and shows the content without any interruption, creating one stunning image by synchronising the content across the wall. The unique builtin NFC sensor in combination with NEC's new Android app reduces installation and maintenance times, especially useful on larger installations.

NEC's vast experience in the video wall market is evident in the design of the X464UNS with features that reduce cost, ease installations and improve the visual impact of content in retail signage, control rooms, broadcast studios, transport installations and for the rental market.

Benefits

Reduced Installation and Operating Costs - highly energy efficient LED backlit display ensures low power consumption, longer backlight lifetime and lighter design for easy transportation, mounting and integration.

Native UHD Daisy Chaining through DisplayPort 1.2 Multistreaming - enables the user to create UHD videowalls with either a single UHD image or 4 different Full HD sources.

Auto Tile Matrix for a complete auto set up for videowalls. Save time and cost by configuring one display in order to complete the set up for the entire wall.

Frame Comp supports a seamless appearance and shows the content without any interruption, creating one stunning image by synchronising the content across the wall.

Unique NEC heat management enables the user to monitor and control the heat inside the display with user controllable fans. Heat management is crucial for larger walls and mission critical installations to secure reliability and longevity.

DICOM support- for medical applications.

Free Download of Multi-Display Management Software - with NaViSet Administrator 2 you can manage all your connected display devices from a centralised location.

Product Information

Product Name	MultiSync® X464UNS
Product Group	NEC LCD 46" Video Wall Display
Order Code	60003722

Display

Panel Technology	S-PVA TFT with direct white LED backlights
Active Screen Area (W x H) [mm]	1,018.1 x 572.7
Screen Size [inch/cm]	46 / 116.8
Aspect Ratio	16:9
Brightness [cd/m²]	700, 420 Eco (shipment setting)
Contrast Ratio (typ.)	3500:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	44
Supported Orientation	Face Up; Landscape; Portrait

Synchronisation Rate

Horizontal Frequency [kHz]	31.5 - 91.1
Vertical Frequency [Hz]	50 - 85

Resolution

Native Resolution	1920 x 1080 at 60 Hz
Supported on DisplayPort and HDMI	3840 x 2160 (24/30 Hz); 1920 x 1080; 1600 x 1200; 1360 x 768; 1280 x 1024; 1280 x 768; 1080i; 1080p; 1024 x 768; 800 x 600; 720p (50/60 Hz); 640 x 480; 576p (50 Hz); 480p (60 Hz)
Supported on HDMI only	4096 x 2160 (24 Hz); 3840 x 2160 (25 Hz); 1360 x 768; 576i (50 Hz); 480i (60 Hz)

Connectivity

Input Video Analogue	1 x D-sub 15 pin
Input Video Digital	1 x DisplayPort (with HDCP); 1 x DVI-D (with HDCP); 1 x HDMI (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	1 x DisplayPort; 1 x HDMI
Input Control	LAN 100Mbit; remote control wire (3,5mm jack); RS232
Output Video Digital	1 x DisplayPort out (loop through: DisplayPort, DVI-D, HDMI, Interface Extension Slot, OPS)
Output Audio Analogue	3,5mm jack
Output Control	LAN 100Mbit
Remote Control	LAN with SNMP; Remote Control IR (internal/external (optional) sensor); RS-232C (9-pin D-sub) Input

OPS Option Slot

Slot Technology	Open pluggable specification (NEC / Intel OPS standard)
Inrush Current [A]	max. 10
Power Consumption [W]	max. 61
Voltage / Current [V/A]	16/4

Interface Extension Slot

Slot Technology	analogue and digital interface extension (NEC standard)
-----------------	---

Sensors

Ambient Light Sensor	Optional, triggered actions programmable
Human Sensor	Optional, external, 4-5m range, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
NFC Sensor	Integrated, 2cm range, free NEC Android App required

Electrical

Power Consumption [W]	110 Eco (shipment setting), 150
Power Savings Mode [W]	< 0.5 (ECO Standby); < 1
Power Management	VESA DPMS

Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80

Mechanical

Dimensions (W x H x D) [mm]	Without stand: 1,022 x 576.6 x 101.3
Weight [kg]	Without stand: 20.4
Bezel Width [mm]	1.2 bottom/right; 2.3 top/left; 3.5; Content to content 3.7
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP40 (front); IP20 (back)

Additional Features

Special Characteristics	Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; DICOM support; Frame Comp; HTTP Server; Image flip; Intelligent Wireless Data (based on NFC); NaViSet Administrator 2; Point Zoom Function; Programmable 10-bit LUT with 3 memory banks; Sticky Note Function in OSD; Super slim bezel with 3.7 mm between contents and 3.5 mm bezel width; TileMatrix; User readable log function
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	C-tick; CE; Energy Star 6.0; FCC Class B; PSB; RoHS; TÜV GS; UL/C-UL or CSA; VCCI
Audio	Optional Speakers (15 W + 15 W)
Shipping Content	CD-ROM (User Guides/Manuals); Display; DisplayPort Cable; Free LAN control software (download); Power Cable Signal Cable: LAN cable
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension
Operating Hours	24/7

Available Options

Accessories	Calibration kit (KT-LFD-CC2); Feet (ST-322); Overframe kit (KT-46UN-OF3); Remote control kit (KT-RC2); Speaker (SP-RM1); Trolley (PD02VWM 2x2 46 55 L, PD02VWM 3x3 46 55 L); Wall mount (PD02VW MFS 46 55 L/P, easyFrame02 X46UN, PD03VWXUN 46L, PD02VWXUN 46P)
Interface Extension	SB3-AB1 analogue: Audio; Component; Composite; S-Video SB3-AB2 analogue: Audio; RGBHV SB3-DB1 digital: 2 x HDMI
OPS	HD-SDI 1.5G and 3G; HDBaseT receiver; Intel® Celeron, Core i3, i5, i7 Slot-in PCs; OPS Digital Signage Player

Green Features

Energy Efficiency	Ambient light sensor; Annual energy consumption: 160 kWh (based on 4 operating hours per day); Carbon savings meter; ECOMode; Energy efficiency class: B; Human Sensor
Ecological Materials	Manuals on CD; Optional feet



This document is © 2016 NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 21.07.2016